



NIRB Uuktuutinga Ihivriughikhamut #125857

Chesterfield Inlet Sealift Facility Improvements Project, NU

Uuktuutinga Qanurittuq: New

Havaap Qanurittunia: Scientific Research

Uuktuutinga Ublua: 9/19/2023 12:32:17 PM

Period of operation: from 0001-01-01 to 0001-01-01

Piumayaat Angirutinga: from 0001-01-01 to 0001-01-01

Havauhikhaq Ikayuqtinga: Richard Hoos
Tetra Tech Canada Inc.
1000, 885 Dunsmuir Street
Vancouver British Columbia V6C 1N5
Canada
Hivayautit Nampanga:: 604 813 4952, Kayumiktukkut Nampanga::

Tukihiannaqtunik havaariya uyumayumik uqauhiyun

Uiviititut: Tetra Tech a été retenu par la communauté de Chesterfield Inlet, au Nunavut, pour mener une étude géotechnique de la zone de plage intertidale proposée pour le développement futur d'une zone de dépôt de transport maritime élargie pour la communauté. Les informations géotechniques souterraines seront un apport nécessaire à la conception du nouveau programme d'expansion du dépôt de transport maritime proposé. Tetra Tech mènera un programme sur le terrain et en laboratoire comprenant les éléments suivants : Des études souterraines (4 à 6 fosses d'essai) seront réalisées à marée basse à la rampe de transport maritime existante et à la zone de dépôt élargie proposée pour évaluer les conditions souterraines et recueillir des échantillons représentatifs de sédiments marins pour tests en laboratoire. La Communauté fournira l'équipement et l'opérateur (c'est-à-dire une pelle rétrocaveuse) pour mener à bien le programme de fosses d'essai. Évaluation visuelle des matériaux in situ. Seront effectués des tests en laboratoire d'échantillons de sol, y compris la classification et la distribution granulométrique. sera entrepris. Calendrier du projet Le programme géotechnique proposé devrait être mené entre le 30 septembre et le 30 octobre 2023. Si l'examen préalable du CNER n'est pas terminé, le programme d'échantillonnage sera retardé jusqu'en juillet 2024.

[illegible]

Personnel on site: 3
Days on site: 5
Total Person days: 15
Operations Phase: from 2023-09-29 to 2023-10-29
Operations Phase: from 2024-07-14 to 2050-09-29
Post-Closure Phase: from to

Hulilukaarutit

Inigiya	Hulilukaarut Qanurittuq	Nunannga Qanurittaakhaanik	Initurlinga qanuritpa	Initurlinga utuqqarnitat unaluuniit Ingilraaqnitat Uyarannguqtut akhuurninnga	Qanitqiyauyuq qanitqiamut nunallaat kitulluuniit ahiruqtaliyainnit nuna
General_Sealift_Laydown_Expansion_Area	Sampling sites	Marine	the sampling area is located adjacent to the existing community sealift laydown area	No archaeological material is expected to be present in the adjacent beach area	the project area is located immediately adjacent to the existing community
ESRI shapefiles	Sampling sites	Marine	sampling sites are located in the intertidal zone immediately adjacent to the existing sealift laydown area	No known archaeological sites are located in the marine area	approximately 200 m from the nearest community infrastructure

Nunaliin Ilauyun, Aviktuqhimayuniitunullu Ikayuuhiarunguyun

Nunauyuq	Atia	Timiuyuq	Upluani Uqaqatigiyaungmata
Igluligaaryuk	Mr. John Ivey	SAO of Chesterfield Inlet	2023-03-01
Igluligaaryuk	Mayor Tony Amauyak	Mayor of Chesterfield Inlet	2023-03-01

Angiuttauvaktunik

Naunaiqlugu nunanga talvani havauhikhaq ittuq:

Angiuttauvaktunik

Munariniqmut Ayuittiaqtuq	Angirutinga Qanurittuq	Tadja Qanurittaakhaanik	Ublua Tuniyauyuq/Uuktuqtuq	Umikvikhaa Ublua
Iqalukhiurniqmut Tariuqmilu Kaanata	Letter of Advice	Active		
Nunavut Kavamanga, Nunavunmi Ihivriuqniqmut Timiqutigiyanga	Scientific Research Licence	Active		

Project transportation types

Transportation Type	Qanuq Atuqtauniarmangaa	Length of Use
Air	Tetra Tech to travel to site via commercial air services	

Project accomodation types

Nunauyuq

Ihuaqutivaluin Atuqtauyukhan

Hanalrutit atuqtaunahuat (ukuallu ikuutat, pampiutainnik, tingmitinik, akhaluutitik, hunaluuniit)

Hanalrutit Qanurittuq	Qaffiuyut	Aktikkulaanga – Qanurittullu	Qanuq Atuqtauniarmangaa
Community Backhoe	1	89x27x45 inches	to excavate and backfill 6 shallow holes in the beach at low tide

Qanurittuq Urhuqyuaq unalu Qayangnaqtut Hunavaluit Aturninnga

Qanurittuq urhuqyuaq hunavaluit aturninnga:	Urhuqyuaq Qanurittuq	Qaffiuyut qattaryut	Qattaryuk Aktikkulaanga	Atauttimut Qaffiuyut	Ilanga	Qanuq Atuqtauniarmangaa
Diesel	fuel	1	50	50	Liters	diesel fuel used to operate the community backhoe which will be used to excavate 5-10 holes for geotechnical investigation and sampling
Diesel	fuel	1	50	50	Liters	fuel for backhoe
No hazardous chemicals	hazardous	0	0	0	Liters	Not applicable

Imaqmik Aturninnga

Ubluq qanuraaluk (m3)	Aturumayain imavaluin utiqittagaani qanuq	Atulirumayain imavaluin utiqittagani humi
0	No water will be used. the geotechnical sampling of the test pits will take place in the dry at low tide	Not applicable

Iqqakuq

Ikkakunik Munakgiyauyunik

Havauhikhaq Hulilukaarut	Qanurittuq Iqqakut	Ihumagiyauyuq Qanuraaluktut Atuqtait	Qanuq Iqqakuurniarmangaa	Halummaqtirarnirutikhan piyutin
Sampling sites	Other, No wastes will be generated. backfilled material will be returned to test pit as soon as geotechnical sampling has been completed	0	Not applicable, not required	Not applicable

Avatiliriniqmut Ayurhautingit:

No environmental impacts are anticipated to occur as a result of the proposed geotechnical test pit sampling program. the test pits will be excavated in the dry at low tide and will be backfilled as soon as sampling has been completed at each test pit.

Additional Information

SECTION A1: Project Info

SECTION A2: Allweather Road

SECTION A3: Winter Road

SECTION B1: Project Info

SECTION B2: Exploration Activity

SECTION B3: Geosciences

SECTION B4: Drilling

SECTION B5: Stripping

SECTION B6: Underground Activity

SECTION B7: Waste Rock

SECTION B8: Stockpiles

SECTION B9: Mine Development

SECTION B10: Geology

SECTION B11: Mine

SECTION B12: Mill

SECTION C1: Pits

SECTION D1: Facility

Not Applicable at this time. the proposed Sealift laydown area expansion project is subject to future government funding. The Community is applying for Federal funding to through the Oceans Protection Plan Safety Equipment and Basic Marine Infrastructure Initiative to advance this project.

SECTION D2: Facility Construction

Tetra Tech anticipates undertaking the analysis and design of the project during 2023, with the tendering and construction anticipated during the spring and summer of 2024 (pending receipt of regulatory approvals).

SECTION D3: Facility Operation

Once constructed the Sealift laydown area expansion project is anticipated to operated for the foreseeable future

SECTION D4: Vessel Use

SECTION E1: Offshore Survey

SECTION E2: Nearshore Survey

SECTION E3: Vessel Use

SECTION F1: Site Cleanup

SECTION G1: Well Authorization

SECTION G2: Onland Exploration

SECTION G3: Offshore Exploration

SECTION G4: Rig

SECTION H1: Vessel Use

Proposed enhancements to the barge ramp will improve vessel operations and safety in the nearshore area

SECTION H2: Disposal At Sea

No disposal at sea is required for this project

SECTION I1: Municipal Development

Qanurittuq Ittunik Avatinga: Avatingalluanga

Chesterfield Inlet's climate is noteworthy for its windiness, since the inlet is aligned with prevailing winds from the northwest, which are remarkably strong in winter (mean velocity 8.7 m/s, reaching 36 m/s) and constant, blowing on average 20% of the time. The mean annual temperature is approximately -11°C, with a summer mean of 4.5°C and a winter mean of -26.5°C. The mean annual precipitation ranges between 200-300 mm.

Qanurittuq Ittunik Avatinga: Inuuhimayunut Avatinga

The proposed geotechnical program will take place in the upland foreshore and low tide areas of the proposed sealift laydown expansion area. The intertidal zone in this area is subject to natural seasonal ground ice and ice scouring activities, which result in a low level of macro flora and fauna productivity in this area. The Western Hudson Bay is an important Arctic Char (*Salvelinus alpinus*) migration corridor and marine feeding region, and a Beluga Whale (*Delphinapterus leucas*) aggregation area

Qanurittuq Ittunik Avatinga: Inungit-maniliurutingit Avatinga

The Inuit name for Chesterfield Inlet is Igluligaarjuk – "place with few houses." For thousands of years, the Thule ancestors of modern Inuit lived around Chesterfield Inlet. Over time, they established large settlements of sod houses, one of which still stands just outside Chesterfield Inlet today. From the mid 1800s to the beginning of this century, whalers visited the area regularly and often overwintered here. They counted on local Inuit to hunt for them and to man their whale boats. Today, the Hamlet of Chesterfield Inlet is a predominantly Inuit speaking Hamlet where approximately 93% (2006 Census of Population - Statistics Canada), of the population is Inuit. Only seven (7%) percent of the population claim English as their mother tongue.

Miscellaneous Project Information

Naunaiyainiq ukuninga Ayurhautingit unalu Piumayaat Ikikliyuumiutinahuarutit

No environmental impacts are anticipated to occur as a result of this short term and immediately reversible project.

Tamatkiumayunik Ihuikgutivaktunik

No environmental impacts are anticipated to occur as a result of this short term and immediately reversible project.

Impacts

Ilitariyauniq Avatiliriniqmut Ayurhautingit

		P H Y S I C A L												S O C I O - E C O N O M I C											
		Designated environmental areas												Archaeological and cultural historic sites											
		Ground stability												Employment											
		Permafrost												Community wellness											
		Hydrology / Limnology												Community infrastructure											
		Water quality												Human health											
		Climate conditions																							
		Eskers and other unique or fragile landscapes																							
		Surface and bedrock geology																							
		Sediment and soil quality																							
		Tidal processes and bathymetry																							
		Air quality																							
		Noise levels																							
		B I O L O G I C A L																							
		Vegetation																							
		Wildlife, including habitat and migration patterns																							
		Birds, including habitat and migration patterns																							
		Aquatic species, incl. habitat and migration/spawning																							
		Wildlife protected areas																							
		S O C I O - E C O N O M I C																							
		Archaeological and cultural historic sites																							
		Employment																							
		Community wellness																							
		Community infrastructure																							
		Human health																							


Havakvinga																									
Sampling sites		M	M	M	-	M	-	-	-	M	-	-	M		-	-	-	M	-		M	P	P	P	P

Aulapkaininnga																									
-		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		-	-	-	-	-

Piiqtauniq																									
-		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		-	-	-	-	-

(P = Nakuuyuq, N = Nakuungittut unalu mikhilimaittuq, M = Nakuungittut unalu mikhittaagtuq, U = Naluyauyuq)

Havaariyauyukhamut Nayugaa

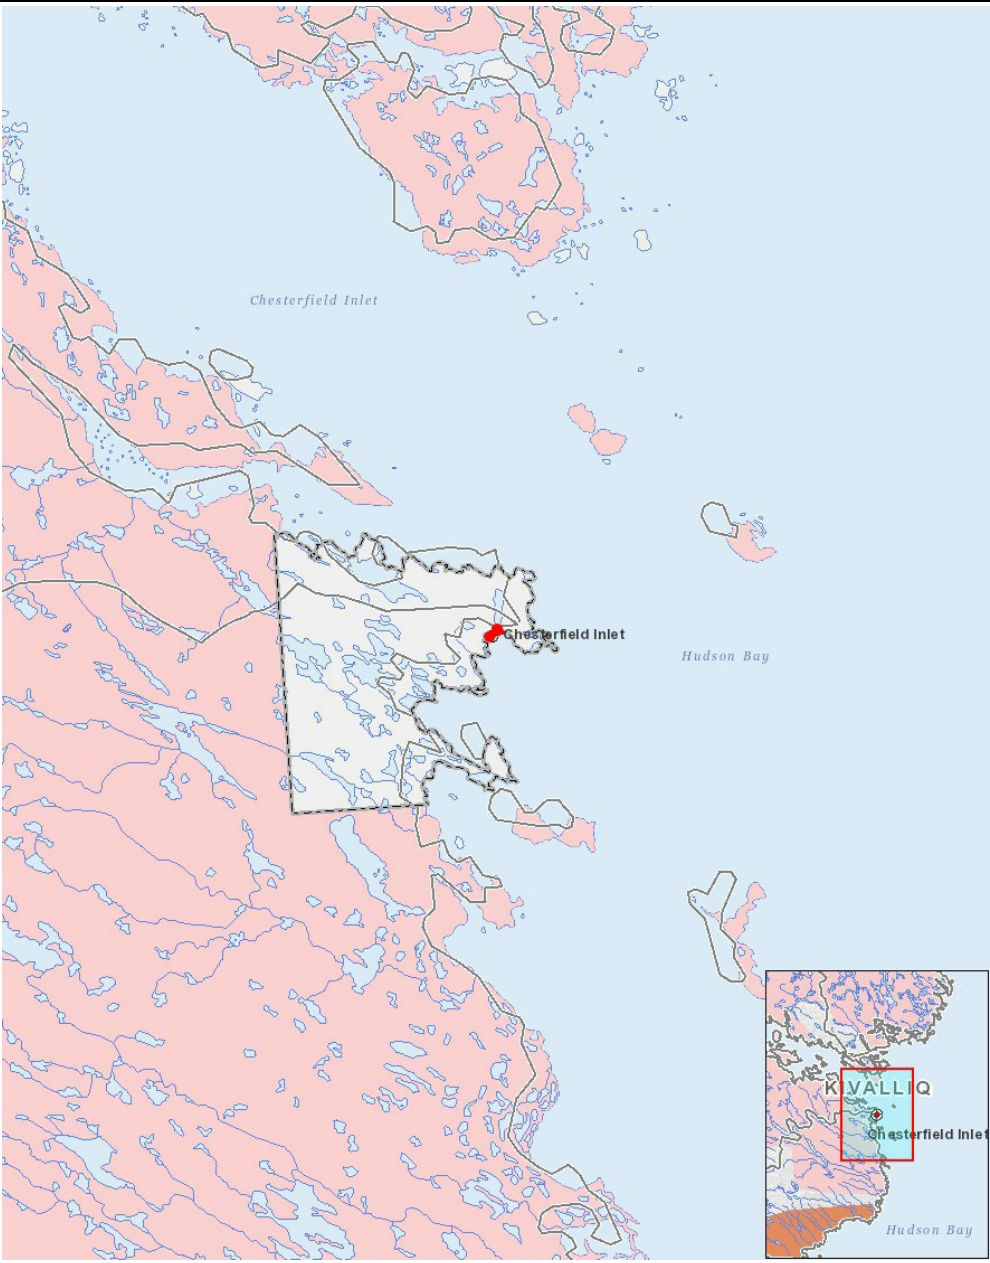

List of Project Geometries

1	polygon	General_Sealift_Laydown_Expansion_Area
2	polygon	General_Sealift_Laydown_Expansion_Area
3	polygon	General_Sealift_Laydown_Expansion_Area
4	polygon	ESRI Shapefile
5	polygon	ESRI Shapefile
6	polygon	ESRI shapefiles
7	point	Point 1 - Latitude: 63.34035 Longitude: 90.697982
8	point	Point 2 - Latitude: 63.3403 Longitude: 90.694888
9	point	Point 3 - Latitude: 63.339538Longitude: 90.694949
10	point	Point 4 - Latitude: 463.339588 Longitude: 90.698043
11	point	complete

