



P.O. Box 119
 GJOA HAVEN, NU X0B 1J0
 TEL: (867) 360-6338
 FAX: (867) 360-6369

ᓄᓇᑖᑦ ᐃᓕᓕᓂᑦ ᑲᓂᓕᑦᑦ
 NUNAVUT IMALIRIYIN KATIMAYINGI
 NUNAVUT WATER BOARD
 OFFICE DES EAUX DU NUNAVUT

WATER LICENCE APPLICATION FORM

Application for: (check one)

- New
 Renewal
 Amendment
 Assignment
 Cancellation

LICENCE NO: (for NWB use only)			
1. NAME AND MAILING ADDRESS OF APPLICANT/LICENSEE <u>Mark Mallory, Environment Canada, CWS</u> <u>Box 1714, Iqaluit NU X0A 0H0</u> Phone: 867 975 4637 Fax: 867 975 4645 e-mail: mark.mallory@ec.gc.ca	2. ADDRESS OF CORPORATE OFFICE IN CANADA (if applicable) _____ Phone: _____ Fax: _____ e-mail: _____		
3. LOCATION OF UNDERTAKING (describe and attach a topographical map, indicating the main components of the Undertaking) Latitude: (75°48' " N) Longitude: (96°20' " W) NTS Map Sheet No. <u>68H</u> Scale: _____			
4. DESCRIPTION OF UNDERTAKING (attach plans and drawings) We have a small, remote field research camp on a small island. The camp holds 4 people for up to 2 months to study breeding biology of High Arctic marine birds.			
5. TYPE OF PRIMARY UNDERTAKING (A supplementary questionnaire <u>must</u> be submitted with the application for undertakings listed in "bold") <table style="width: 100%; margin-top: 10px;"> <tr> <td style="width: 50%; vertical-align: top;"> <input type="checkbox"/> Industrial <input type="checkbox"/> Mining and Milling (includes exploration/drilling) <input type="checkbox"/> Municipal (includes camps/lodges) <input type="checkbox"/> Power </td> <td style="width: 50%; vertical-align: top;"> <input type="checkbox"/> Agricultural <input checked="" type="checkbox"/> Conservation <input type="checkbox"/> Recreational <input type="checkbox"/> Miscellaneous (describe below): </td> </tr> </table>		<input type="checkbox"/> Industrial <input type="checkbox"/> Mining and Milling (includes exploration/drilling) <input type="checkbox"/> Municipal (includes camps/lodges) <input type="checkbox"/> Power	<input type="checkbox"/> Agricultural <input checked="" type="checkbox"/> Conservation <input type="checkbox"/> Recreational <input type="checkbox"/> Miscellaneous (describe below):
<input type="checkbox"/> Industrial <input type="checkbox"/> Mining and Milling (includes exploration/drilling) <input type="checkbox"/> Municipal (includes camps/lodges) <input type="checkbox"/> Power	<input type="checkbox"/> Agricultural <input checked="" type="checkbox"/> Conservation <input type="checkbox"/> Recreational <input type="checkbox"/> Miscellaneous (describe below):		
See Schedule II of <i>Northwest Territories Waters Regulations</i> for Description of Undertakings			

6. WATER USE

- | | |
|---|--|
| <input checked="" type="checkbox"/> To obtain water | <input type="checkbox"/> Flood control |
| <input type="checkbox"/> To cross a watercourse | <input type="checkbox"/> To divert a watercourse |
| <input type="checkbox"/> To modify the bed or bank of a watercourse | <input type="checkbox"/> To alter the flow of, or store, water |

Other (describe): We use very little water, estimated at 5 m³ per season. There are no showers - we melt snow for water, and have a small sump for grey water.

7. QUANTITY OF WATER INVOLVED (cubic metres per day including both quantity to be used and quality to be returned to source)

- Water use 100m³/day or less
 Greater than 100m³/day; if greater, indicate quantities to be used for each purpose (camp, drilling, etc.)

Water returned to source
 _____ m³/day

8. WASTE (for each type of waste describe: composition, quantity (cubic metres per day), methods of treatment and disposal, etc.)

- | | |
|--|---|
| <input checked="" type="checkbox"/> Sewage | <input type="checkbox"/> Waste oil |
| <input checked="" type="checkbox"/> Solid Waste | <input checked="" type="checkbox"/> Greywater |
| <input type="checkbox"/> Hazardous | <input type="checkbox"/> Sludges |
| <input type="checkbox"/> Bulky Items/Scrap Metal | <input type="checkbox"/> Other describe): Solid waste is bagged and returned to Resolute Bay for disposal; sewage is deposited in a dug hole > 150 m from the ocean; greywater is disposed of in a small sump > 150 m from ocean. |

9. OTHER PERSONS OR PROPERTIES AFFECTED BY THIS UNDERTAKING (give name, mailing address and location; attach if necessary)

None - remote site.

Land Use Permit
 DIAND Yes No If no, date expected Reserve or administrative transfer applied for February 2008

Regional Inuit Association Yes No If no, date expected _____

Commissioner Yes No If no, date expected _____

10. PREDICTED ENVIRONMENTAL IMPACTS OF UNDERTAKING AND PROPOSED MITIGATION MEASURES (direct, indirect, cumulative impacts, etc.)

NIRB Screening Yes No If no, date expected _____

11. INUIT WATER RIGHTS

Will the project or activity substantially affect the quality, quantity, or flow of water flowing through Inuit Owned Lands and the rights of Inuit under Article 20 of the Nunavut Land Claims Agreement?
 NO

If yes, has the applicant entered into an agreement with the Designated Inuit organization to pay compensation for any loss or damage that may be caused by the alteration. If no compensation agreement has been made, how will compensation be determined?

12. CONTRACTORS AND SUB-CONTRACTORS (name, address and functions)

None that I believe in the sense intended. Field crew of ~ 4, 2 Environment Canada staff, 2 students.

13. STUDIES UNDERTAKEN TO DATE (list and attach copies of studies, reports, research, etc.)

This is a research study to unobtrusively assess basic breeding biology of birds at the site.

14. THE FOLLOWING DOCUMENTS MUST BE INCLUDED WITH THE APPLICATION FOR THE REGULATORY PROCESS TO BEGIN

Supplementary Questionnaire (where applicable: see section 5) Yes No If no, date expected _____

Inuktitut and/or Inuinnaqtun/English Summary of Project Yes No If no, date expected _____

Application fee of \$30.00 (Payee Receiver General for Canada) Yes No If no, date expected _____

Water Use fee of \$30.00 (unless otherwise indicated in Section 9 of the *NWT Waters Regulations*; Payee Receiver General for Canada) Yes No If no, date expected _____

15. PROPOSED TIME SCHEDULE (unless otherwise indicated, the NWB will consider the application for a five (5) year term)

one year or less (or) Multi Year

Start Date: July 1, 2008 Completion Date: August 30, 2010

MARK MALLORY
Name (Print)

SEABIRD BIOLOGIST
Title (Print)

Mark Mallory
Signature

29 April 2008
Date

For Nunavut Water Board office use only

APPLICATION FEE Amount: \$ _____ Pay ID No.: _____

WATER USE DEPOSIT Amount: \$ _____ Pay ID No.: _____



P.O. Box 119
 GJOA HAVEN, NU X0B 1J0
 TEL: (867) 360-6338
 FAX: (867) 360-6369

ᓄᓇᓂᓪ ᐃᓕᓕᓂᓪ ᐅᓂᓕᓂᓪ
 NUNAVUT WATER BOARD
 NUNAVUT IMALIRIYIN KATIMAYINGI
 OFFICE DES EAUX DU NUNAVUT

**EXPLORATION/ REMOTE CAMP
 SUPPLEMENTARY QUESTIONNAIRE**

Applicant: MARK MALLORY Licence No: _____
 (For NWB Use Only)

ADMINISTRATIVE INFORMATION

1. Environment Manager: _____ Tel: _____ Fax: _____ E-mail: _____

2. Project Manager: Same Tel: 867 975 4637 Fax: 867 975 4645 E-mail: mark.mallory@ec.gc.ca

3. Does the applicant hold the necessary property rights? APPLICATION IN TO INAC

4. Is the applicant an 'operator' for another company (i.e., the holder of the property rights)? If so, please provide letter of authorization. NO

5. Duration of the Project

One year or less Start and completion dates: ~~JULY/08 - AUG/11~~
 Multi Year:

If Multi-Year indicate proposed schedule of on site activities
 Start: July 2008 Completion: August 2011

CAMP CLASSIFICATION

6. Type of Camp

Mobile (self-propelled)
 Temporary
 Seasonally Occupied: ~ 2 months / yr
 Permanent
 Other: _____

7. What is the design, maximum and expected average population of the camp?

Average ~ 4 people (3-5)

8. Provide history of the site if it has been used in the past.

Has been surveyed for 1hr since 2002; had brief camp in 2007

CAMP LOCATION

9. Please describe proposed camp location in relation to biogeographical and geomorphological features, and water bodies.

Centre of small (2 km x 0.75 km) island, on central rock ridge, 100 m from meltwater pond

10. How was the location of the camp selected? Was the site previously used? Was assistance from the Regional Inuit Association Land Manager sought? Include maps and/or aerial photographs.

Chosen as best site for doserving approaching bears, proximity to bird colony, consulted with Resolute Bay HTA in Jan. 2006

11. Is the camp or any aspect of the project located on:

- Crown Lands Permit Number (s)/Expiry Date: Reserve Application submitted
- Commissioners Lands Permit Number (s)/Expiry Date: _____
- Inuit Owned Lands Permit Number (s)/Expiry Date: _____

12. Closest Communities (direction and distance in km):

Resolute Bay, 150 km south of site

13. Has the proponent notified and consulted the nearby communities and potentially interested parties about the proposed work?

Yes, consultation in Jan 2006, annual, translated FAXes to community, GN wildlife Permit process (annual) notification

14. Will the project have impacts on traditional water use areas used by the nearby communities? Will the project have impacts on local fish and wildlife habitats?

No and No

PURPOSE OF THE CAMP

- Mining (includes exploration drilling)
- Tourism (hunting, fishing, wildlife observation, adventure/expedition, etc.) (Omit questions # 16 to 21)
- Other Scientific Research

16. Activities (check all applicable)

- Preliminary site visit
- Prospecting
- Geological mapping
- Geophysical survey
- Diamond drilling

- Reverse circulation drilling
- Evaluation Drilling/Bulk Sampling (also complete separate questionnaire)
- Other: _____

17. Type of deposit (exploration focus): **N/A**

- Lead Zinc
- Diamond
- Gold
- Uranium
- Other: _____

DRILLING INFORMATION

18. Drilling Activities **N/A**

- Land Based drilling
- Drilling on ice

19. Describe what will be done with drill cuttings?

20. Describe what will be done with drill water?

21. List the brand names and constituents of the drill additives to be used? Includes MSDS sheets and provide confirmation that the additives are non-toxic and biodegradable.

22. Will any core testing be done on site? Describe.

SPILL CONTINGENCY PLANNING

23. The proponent is required to have a site specific Spill Contingency Plan prepared and submitted with the application This Plan should be prepared in accordance with the *NWT Environmental Protection Act, Spill Contingency Planning and Reporting Regulations, July 22, 1998* and *A Guide to the Spill Contingency Planning and Reporting Regulations, June 2002*. Please include for review.

See attached

24. How many spill kits will be on site and where will they be located? **1, near fuel drums**

25. Please describe the types, quantities, and method of storage of fuel and chemicals on site, and provide MSDS sheets.

1 drum gasoline
1 drum kerosene
1 100 lb canister propane

WATER SUPPLY AND TREATMENT

26. Describe the location of water sources.

we melt snow near the camp and store in camping barrels, or use water from shallow, meltwater pond later in season; ~ 100m from camp.

27. Estimated water use (in cubic metres/day):

- Domestic Use: max 0.083 Water Source: snow or pond
 Drilling: _____ Water Source: _____
 Other: _____ Water Source: _____

28. Describe water intake for camp operations? Is the water intake equipped with a mesh screen to prevent entrapment of fish? (see DFO 1995, *Freshwater Intake End-of-Pipe Fish Screen Guideline*) Describe:

N/A

29. Will drinking water quality be monitored? What parameters will be analyzed and at what frequency?

N/A

30. Will drinking water be treated? How?

No/ Snow melt

31. Will water be stored on site?

yes, in camping barrels (approx 40L barrels)

WASTE TREATMENT AND DISPOSAL

32. Describe the characteristics, quantities, treatment and disposal methods for:

Camp Sewage (blackwater)

Buried in hole dug >150 m from shore

Camp Greywater

Est. 10 L/day, dumped in sump hole >150 m from shore

Solid Waste

Combustibles burned in drum; non-combustibles taken back to Resolute

Bulky Items/Scrap Metal

N/A

Waste Oil/Hazardous Waste

N/A

Empty Barrels/Fuel Drums

Picked up by Polar Shelf and returned to Resolute Bay base

Other:

33. Please describe incineration system if used on site. What types of wastes will be incinerated?

Paper/waste food burned in 205 L drum

34. Where and how will non-combustible waste be disposed of? If in a municipality in Nunavut, has authorization been granted?

Taken to NRCAN base in Resolute Bay, which has long-term agreement for waste

35. Describe location (relative to water bodies and camp facilities) dimensions and volume, and freeboard for all sumps (if applicable).

Sumps >150 m from meltwater pond and marine shoreline. Volume ~ 300 L (Dim 1 m x 1 m x 30 cm)

36. Will leachate monitoring be done? What parameters will be sampled and analyzed, and at what frequency?

NO

OPERATION AND MAINTENANCE

37. Have the water supply and waste treatment and disposal methods been used and proven in cold climate? What known O&M problems may occur? What contingency plans are in place?

N/A - just like camping

ABANDONMENT AND RESTORATION

38. Provide a detailed description of progressive and final abandonment and restoration activities at the site.

Long-term research site planned; possible future protected area and thus site disturbance kept to minimum.

BASELINE DATA

39. Has or will any baseline information be collected as part of this project? Provide bibliography.


This is what we are doing!

- Physical Environment (Landscape and Terrain, Air, Water, etc.)
 Biological Environment (Vegetation, Wildlife, Birds, Fish and Other Aquatic Organisms, etc.)
 Socio-Economic Environment (Archaeology, Land and Resources Use, Demographics, Social and Culture Patterns, etc.)
 Other: _____


REGULATORY INFORMATION

40. At a minimum, you should ensure you have a copy of and consult the documents below for compliance with existing regulatory requirements:

- ✓ ARTICLE 13 – NCLA -Nunavut Land Claims Agreement
- ✓ NWNSRTA – The Nunavut Waters and Nunavut Surface Rights Tribunal Act, 2002
- ✓ Northwest Territories Waters Regulations, 1993
- ✓ NWB - Water Licensing in Nunavut - Interim Procedures and Information Guide for Applicants
- ✓ NWB - Interim Rules of Practice and Procedure for Public Hearings
- ✓ RWED – Environmental Protection Act, R-068-93- Spill Contingency Planning and Reporting Regulations, 1993
- ✓ RWED A Guide to the Spill Contingency Planning and Reporting Regulations, 2002
- ✓ NWTWB - Guidelines for Contingency Planning
- ✓ Canadian Environmental Protection Act, 1999 (CEPA)
- ✓ Fisheries Act, RS 1985 - s.34, 35, 36 and 37
- ✓ DFO - Freshwater Intake End of Pipe Fish Screen Guideline
- ✓ NWTWB - Guidelines for the Discharge of Treated Municipal Wastewater in the NWT

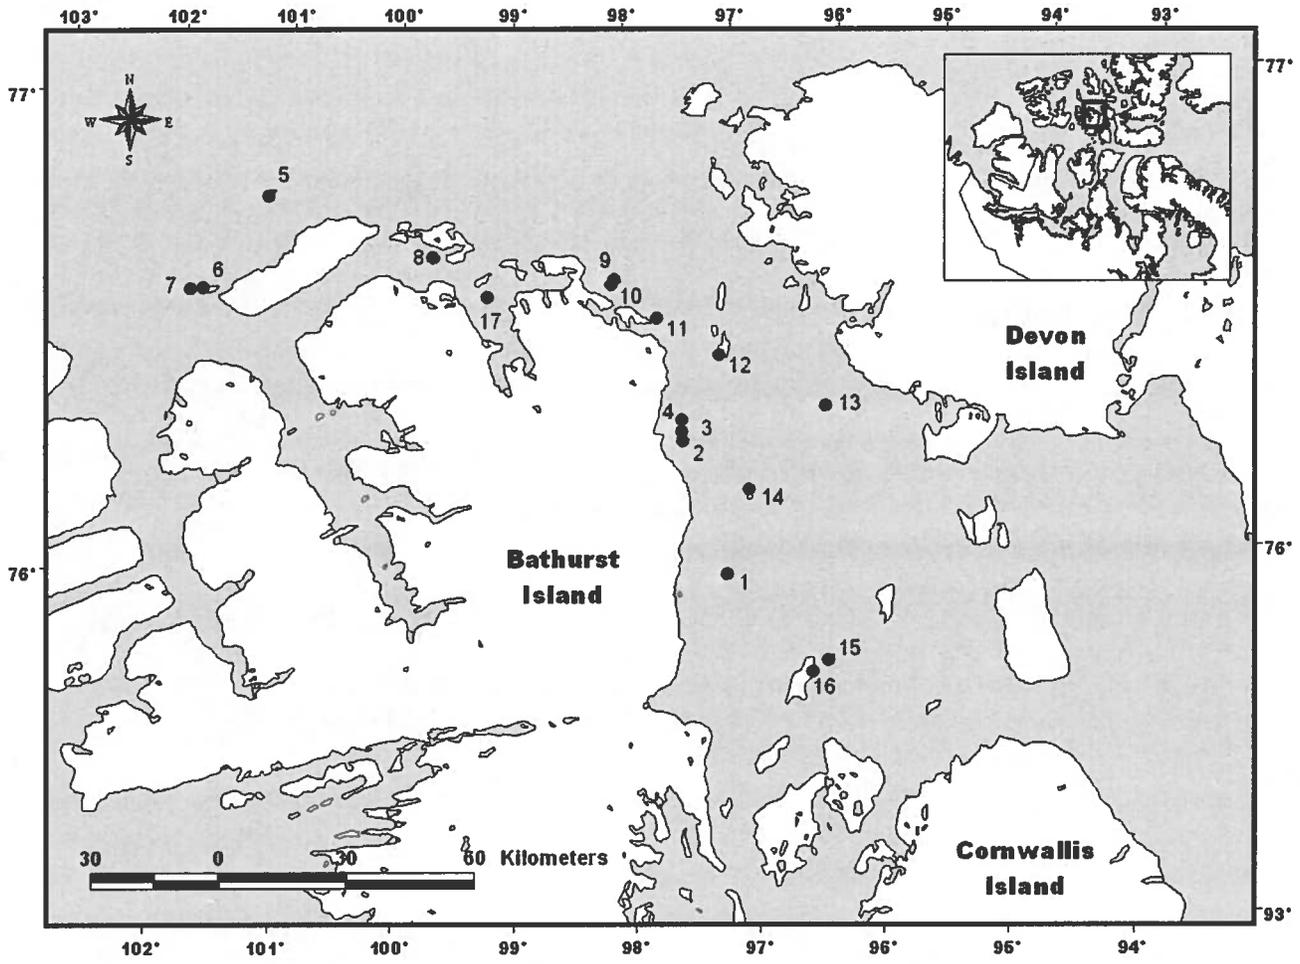

Proposed site is island 15, ~ 140 km N of Resolute Bay

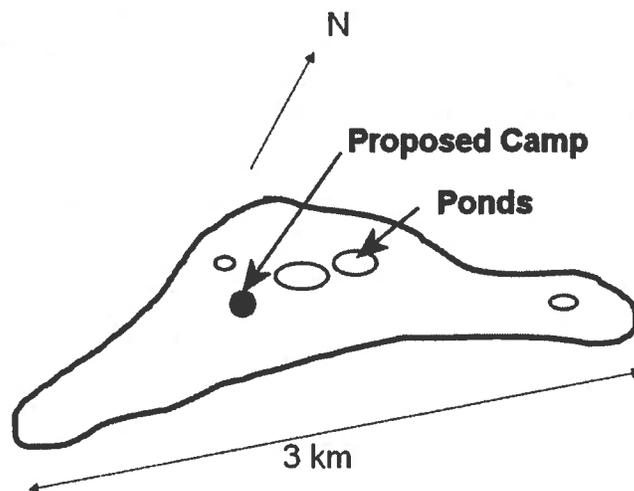

AMERADA HESS CORPORATION

MATERIAL SAFETY DATA SHEET

Gasoline, All Grades

MSDS No. 9950

EMERGENCY OVERVIEW

DANGER!

**EXTREMELY FLAMMABLE - EYE AND MUCOUS MEMBRANE IRRITANT
- EFFECTS CENTRAL NERVOUS SYSTEM - HARMFUL OR FATAL IF
SWALLOWED - ASPIRATION HAZARD**



NFPA 704 (Section 16)

High fire hazard. Keep away from heat, spark, open flame, and other ignition sources.

If ingested, do NOT induce vomiting, as this may cause chemical pneumonia (fluid in the lungs). Contact may cause eye, skin and mucous membrane irritation. Harmful if absorbed through the skin. Avoid prolonged breathing of vapors or mists. Inhalation may cause irritation, anesthetic effects (dizziness, nausea, headache, intoxication), and respiratory system effects.

Long-term exposure may cause effects to specific organs, such as to the liver, kidneys, blood, nervous system, and skin. Contains benzene, which can cause blood disease, including anemia and leukemia.

1. CHEMICAL PRODUCT and COMPANY INFORMATION (rev. Jan-04)

Amerada Hess Corporation
1 Hess Plaza
Woodbridge, NJ 07095-0961

EMERGENCY TELEPHONE NUMBER (24 hrs):

CHEMTREC (800)424-9300

COMPANY CONTACT (business hours):

Corporate Safety (732)750-6000

MSDS Internet Website

www.hess.com/about/enviro.html

SYNONYMS: Hess Conventional (Oxygenated and Non-oxygenated) Gasoline; Reformulated Gasoline (RFG); Reformulated Gasoline Blendstock for Oxygenate Blending (RBOB); Unleaded Motor or Automotive Gasoline

See Section 16 for abbreviations and acronyms.

2. COMPOSITION and INFORMATION ON INGREDIENTS * (rev. Jan-04)

INGREDIENT NAME (CAS No.)	CONCENTRATION PERCENT BY WEIGHT
Gasoline (86290-81-5)	100
Benzene (71-43-2)	0.1 - 4.9 (0.1 - 1.3 reformulated gasoline)
n-Butane (106-97-8)	< 10
Ethyl Alcohol (Ethanol) (64-17-5)	0 - 10
Ethyl benzene (100-41-4)	< 3
n-Hexane (110-54-3)	0.5 to 4
Methyl-tertiary butyl ether (MTBE) (1634-04-4)	0 to 15.0
Tertiary-amyl methyl ether (TAME) (994-05-8)	0 to 17.2
Toluene (108-88-3)	1 - 25
1,2,4- Trimethylbenzene (95-63-6)	< 6
Xylene, mixed isomers (1330-20-7)	1 - 15

A complex blend of petroleum-derived normal and branched-chain alkane, cycloalkane, alkene, and aromatic hydrocarbons. May contain antioxidant and multifunctional additives. Non-oxygenated Conventional Gasoline and RBOB do not have oxygenates (Ethanol or MTBE and/or TAME). Oxygenated Conventional and Reformulated Gasoline will have oxygenates for octane enhancement or as legally required.

AMERADA HESS CORPORATION

MATERIAL SAFETY DATA SHEET

Gasoline, All Grades

MSDS No. 9950

3. HAZARDS IDENTIFICATION (rev. Dec-97)

EYES

Moderate irritant. Contact with liquid or vapor may cause irritation.

SKIN

Practically non-toxic if absorbed following acute (single) exposure. May cause skin irritation with prolonged or repeated contact. Liquid may be absorbed through the skin in toxic amounts if large areas of skin are exposed repeatedly.

INGESTION

The major health threat of ingestion occurs from the danger of aspiration (breathing) of liquid drops into the lungs, particularly from vomiting. Aspiration may result in chemical pneumonia (fluid in the lungs), severe lung damage, respiratory failure and even death.

Ingestion may cause gastrointestinal disturbances, including irritation, nausea, vomiting and diarrhea, and central nervous system (brain) effects similar to alcohol intoxication. In severe cases, tremors, convulsions, loss of consciousness, coma, respiratory arrest, and death may occur.

INHALATION

Excessive exposure may cause irritations to the nose, throat, lungs and respiratory tract. Central nervous system (brain) effects may include headache, dizziness, loss of balance and coordination, unconsciousness, coma, respiratory failure, and death.

WARNING: the burning of any hydrocarbon as a fuel in an area without adequate ventilation may result in hazardous levels of combustion products, including carbon monoxide, and inadequate oxygen levels, which may cause unconsciousness, suffocation, and death.

CHRONIC EFFECTS and CARCINOGENICITY

Contains benzene, a regulated human carcinogen. Benzene has the potential to cause anemia and other blood diseases, including leukemia, after repeated and prolonged exposure. Exposure to light hydrocarbons in the same boiling range as this product has been associated in animal studies with systemic toxicity. See also Section 11 - Toxicological Information.

MEDICAL CONDITIONS AGGRAVATED BY EXPOSURE

Irritation from skin exposure may aggravate existing open wounds, skin disorders, and dermatitis (rash). Chronic respiratory disease, liver or kidney dysfunction, or pre-existing central nervous system disorders may be aggravated by exposure.

4. FIRST AID MEASURES (rev. Dec-97)

EYES

In case of contact with eyes, immediately flush with clean, low-pressure water for at least 15 min. Hold eyelids open to ensure adequate flushing. Seek medical attention.

SKIN

Remove contaminated clothing. Wash contaminated areas thoroughly with soap and water or waterless hand cleanser. Obtain medical attention if irritation or redness develops.

INGESTION

DO NOT INDUCE VOMITING. Do not give liquids. Obtain immediate medical attention. If spontaneous vomiting occurs, lean victim forward to reduce the risk of aspiration. Small amounts of material which enter the mouth should be rinsed out until the taste is dissipated.

INHALATION

Remove person to fresh air. If person is not breathing, ensure an open airway and provide artificial respiration. If necessary, provide additional oxygen once breathing is restored if trained to do so. Seek medical attention immediately.

AMERADA HESS CORPORATION

MATERIAL SAFETY DATA SHEET

Gasoline, All Grades

MSDS No. 9950

5. FIRE FIGHTING MEASURES (rev. Dec-97)

FLAMMABLE PROPERTIES:

FLASH POINT:	-45 °F (-43°C)
AUTOIGNITION TEMPERATURE:	highly variable; > 530 °F (>280 °C)
OSHA/NFPA FLAMMABILITY CLASS:	1A (flammable liquid)
LOWER EXPLOSIVE LIMIT (%):	1.4%
UPPER EXPLOSIVE LIMIT (%):	7.6%

FIRE AND EXPLOSION HAZARDS

Vapors may be ignited rapidly when exposed to heat, spark, open flame or other source of ignition. Flowing product may be ignited by self-generated static electricity. When mixed with air and exposed to an ignition source, flammable vapors can burn in the open or explode in confined spaces. Being heavier than air, vapors may travel long distances to an ignition source and flash back. Runoff to sewer may cause fire or explosion hazard.

EXTINGUISHING MEDIA

SMALL FIRES: Any extinguisher suitable for Class B fires, dry chemical, CO₂, water spray, fire fighting foam, or Halon.

LARGE FIRES: Water spray, fog or fire fighting foam. Water may be ineffective for fighting the fire, but may be used to cool fire-exposed containers.

During certain times of the year and/or in certain geographical locations, gasoline may contain MTBE and/or TAME. Firefighting foam suitable for polar solvents is recommended for fuel with greater than 10% oxygenate concentration - refer to NFPA 11 "Low Expansion Foam - 1994 Edition."

FIRE FIGHTING INSTRUCTIONS

Small fires in the incipient (beginning) stage may typically be extinguished using handheld portable fire extinguishers and other fire fighting equipment.

Firefighting activities that may result in potential exposure to high heat, smoke or toxic by-products of combustion should require NIOSH/MSHA- approved pressure-demand self-contained breathing apparatus with full facepiece and full protective clothing.

Isolate area around container involved in fire. Cool tanks, shells, and containers exposed to fire and excessive heat with water. For massive fires the use of unmanned hose holders or monitor nozzles may be advantageous to further minimize personnel exposure. Major fires may require withdrawal, allowing the tank to burn. Large storage tank fires typically require specially trained personnel and equipment to extinguish the fire, often including the need for properly applied fire fighting foam.

See Section 16 for the NFPA 704 Hazard Rating.

6. ACCIDENTAL RELEASE MEASURES (rev. Dec-97)

ACTIVATE FACILITY SPILL CONTINGENCY or EMERGENCY PLAN.

Evacuate nonessential personnel and remove or secure all ignition sources. Consider wind direction; stay upwind and uphill, if possible. Evaluate the direction of product travel, diking, sewers, etc. to confirm spill areas. Spills may infiltrate subsurface soil and groundwater; professional assistance may be necessary to determine the extent of subsurface impact.

Carefully contain and stop the source of the spill, if safe to do so. Protect bodies of water by diking, absorbents, or absorbent boom, if possible. Do not flush down sewer or drainage systems, unless system is designed and permitted to handle such material. The use of fire fighting foam may be useful in certain situations to reduce vapors. The proper use of water spray may effectively disperse product

AMERADA HESS CORPORATION

MATERIAL SAFETY DATA SHEET

Gasoline, All Grades

MSDS No. 9950

vapors or the liquid itself, preventing contact with ignition sources or areas/equipment that require protection.

Take up with sand or other oil absorbing materials. Carefully shovel, scoop or sweep up into a waste container for reclamation or disposal - caution, flammable vapors may accumulate in closed containers. Response and clean-up crews must be properly trained and must utilize proper protective equipment (see Section 8).

7. HANDLING and STORAGE (rev. Dec-97)

HANDLING PRECAUTIONS

*****USE ONLY AS A MOTOR FUEL*****

*****DO NOT SIPHON BY MOUTH*****

Handle as a flammable liquid. Keep away from heat, sparks, and open flame! Electrical equipment should be approved for classified area. Bond and ground containers during product transfer to reduce the possibility of static-initiated fire or explosion.

Special slow load procedures for "switch loading" must be followed to avoid the static ignition hazard that can exist when higher flash point material (such as fuel oil) is loaded into tanks previously containing low flash point products (such as this product) - see API Publication 2003, "Protection Against Ignitions Arising Out Of Static, Lightning and Stray Currents.

STORAGE PRECAUTIONS

Keep away from flame, sparks, excessive temperatures and open flame. Use approved vented containers. Keep containers closed and clearly labeled. Empty product containers or vessels may contain explosive vapors. Do not pressurize, cut, heat, weld or expose such containers to sources of ignition.

Store in a well-ventilated area. This storage area should comply with NFPA 30 "Flammable and Combustible Liquid Code". Avoid storage near incompatible materials. The cleaning of tanks previously containing this product should follow API Recommended Practice (RP) 2013 "Cleaning Mobile Tanks In Flammable and Combustible Liquid Service" and API RP 2015 "Cleaning Petroleum Storage Tanks".

WORK/HYGIENIC PRACTICES

Emergency eye wash capability should be available in the near proximity to operations presenting a potential splash exposure. Use good personal hygiene practices. Avoid repeated and/or prolonged skin exposure. Wash hands before eating, drinking, smoking, or using toilet facilities. Do not use as a cleaning solvent on the skin. Do not use solvents or harsh abrasive skin cleaners for washing this product from exposed skin areas. Waterless hand cleaners are effective. Promptly remove contaminated clothing and launder before reuse. Use care when laundering to prevent the formation of flammable vapors which could ignite via washer or dryer. Consider the need to discard contaminated leather shoes and gloves.

8. EXPOSURE CONTROLS and PERSONAL PROTECTION (rev. Jan-04)

EXPOSURE LIMITS

Component (CAS No.)	Source	TWA (ppm)	STEL (ppm)	Exposure Limits	Note
Gasoline (86290-81-5)	ACGIH	300	500	A3	
Benzene (71-43-2)	OSHA	1	5	Carcinogen	
	ACGIH	0.5	2.5	A1, skin	
	USCG	1	5		
n-Butane (106-97-8)	ACGIH	800	--	2003 NOIC: 1000 ppm (TWA) Aliphatic Hydrocarbon Gases Alkane (C1-C4)	
Ethyl Alcohol (ethanol) (64-17-5)	OSHA	1000	--		
	ACGIH	1000	--	A4	
Ethyl benzene (100-41-4)	OSHA	100	--		
	ACGIH	100	125	A3	

AMERADA HESS CORPORATION

MATERIAL SAFETY DATA SHEET

Gasoline, All Grades

MSDS No. 9950

Component (CAS No.)	Source	Exposure Limits			Note
		TWA (ppm)	STEL (ppm)		
n-Hexane (110-54-3)	OSHA	500	--		
	ACGIH	50	--	skin	
Methyl-tertiary butyl ether [MTBE] (1634-04-4)	ACGIH	50	--	A3	
Tertiary-amyl methyl ether [TAME] (994-05-8)				None established	
Toluene (108-88-3)	OSHA	200	--	Ceiling: 300 ppm; Peak: 500 ppm (10 min.)	
	ACGIH	50	--	A4 (skin)	
1,2,4-Trimethylbenzene (95-63-6)	ACGIH	25	--		
Xylene, mixed isomers (1330-20-7)	OSHA	100	--		
	ACGIH	100	150	A4	

ENGINEERING CONTROLS

Use adequate ventilation to keep vapor concentrations of this product below occupational exposure and flammability limits, particularly in confined spaces.

EYE/FACE PROTECTION

Safety glasses or goggles are recommended where there is a possibility of splashing or spraying.

SKIN PROTECTION

Gloves constructed of nitrile or neoprene are recommended. Chemical protective clothing such as that made of of E.I. DuPont Tychem®, products or equivalent is recommended based on degree of exposure.

Note: The resistance of specific material may vary from product to product as well as with degree of exposure. Consult manufacturer specifications for further information.

RESPIRATORY PROTECTION

A NIOSH-approved air-purifying respirator with organic vapor cartridges or canister may be permissible under certain circumstances where airborne concentrations are or may be expected to exceed exposure limits or for odor or irritation. Protection provided by air-purifying respirators is limited. Refer to OSHA 29 CFR 1910.134, NIOSH Respirator Decision Logic, and the manufacturer for additional guidance on respiratory protection selection and limitations.

Use a positive pressure, air-supplied respirator if there is a potential for uncontrolled release, exposure levels are not known, in oxygen-deficient atmospheres, or any other circumstance where an air-purifying respirator may not provide adequate protection.

9. PHYSICAL and CHEMICAL PROPERTIES (rev. Jan-04)

APPEARANCE

A translucent, straw-colored or light yellow liquid

ODOR

A strong, characteristic aromatic hydrocarbon odor. Oxygenated gasoline with MTBE and/or TAME may have a sweet, ether-like odor and is detectable at a lower concentration than non-oxygenated gasoline.

ODOR THRESHOLD

	<u>Odor Detection</u>	<u>Odor Recognition</u>
Non-oxygenated gasoline:	0.5 - 0.6 ppm	0.8 - 1.1 ppm
Gasoline with 15% MTBE:	0.2 - 0.3 ppm	0.4 - 0.7 ppm
Gasoline with 15% TAME:	0.1 ppm	0.2 ppm

BASIC PHYSICAL PROPERTIES

BOILING RANGE:	85 to 437 °F (39 to 200 °C)
VAPOR PRESSURE:	6.4 - 15 RVP @ 100 °F (38 °C) (275-475 mm Hg @ 68 °F (20 °C)
VAPOR DENSITY (air = 1):	AP 3 to 4
SPECIFIC GRAVITY (H ₂ O = 1):	0.70 - 0.78
EVAPORATION RATE:	10-11 (n-butyl acetate = 1)
PERCENT VOLATILES:	100 %

AMERADA HESS CORPORATION

MATERIAL SAFETY DATA SHEET

Gasoline, All Grades

MSDS No. 9950

SOLUBILITY (H₂O):

Non-oxygenated gasoline - negligible (< 0.1% @ 77 °F). Gasoline with 15% MTBE - slight (0.1 - 3% @ 77 °F); ethanol is readily soluble in water

10. STABILITY and REACTIVITY (rev. Dec-94)

STABILITY: Stable. Hazardous polymerization will not occur.

CONDITIONS TO AVOID

Avoid high temperatures, open flames, sparks, welding, smoking and other ignition sources

INCOMPATIBLE MATERIALS

Keep away from strong oxidizers.

HAZARDOUS DECOMPOSITION PRODUCTS

Carbon monoxide, carbon dioxide and non-combusted hydrocarbons (smoke). Contact with nitric and sulfuric acids will form nitrocresols that can decompose violently.

11. TOXICOLOGICAL PROPERTIES (rev. Dec-97)

ACUTE TOXICITY

Acute Dermal LD50 (rabbits): > 5 ml/kg

Acute Oral LD50 (rat): 18.75 ml/kg

Primary dermal irritation (rabbits): slightly irritating

Draize eye irritation (rabbits): non-irritating

Guinea pig sensitization: negative

CHRONIC EFFECTS AND CARCINOGENICITY

Carcinogenicity: OSHA: NO IARC: YES - 2B

NTP: NO

ACGIH: YES (A3)

IARC has determined that gasoline and gasoline exhaust are possibly carcinogenic in humans. Inhalation exposure to completely vaporized unleaded gasoline caused kidney cancers in male rats and liver tumors in female mice. The U.S. EPA has determined that the male kidney tumors are species-specific and are irrelevant for human health risk assessment. The significance of the tumors seen in female mice is not known. Exposure to light hydrocarbons in the same boiling range as this product has been associated in animal studies with effects to the central and peripheral nervous systems, liver, and kidneys. The significance of these animal models to predict similar human response to gasoline is uncertain.

This product contains benzene. Human health studies indicate that prolonged and/or repeated overexposure to benzene may cause damage to the blood-forming system (particularly bone marrow), and serious blood disorders such as aplastic anemia and leukemia. Benzene is listed as a human carcinogen by the NTP, IARC, OSHA and ACGIH.

This product may contain methyl tertiary butyl ether (MTBE): animal and human health effects studies indicate that MTBE may cause eye, skin, and respiratory tract irritation, central nervous system depression and neurotoxicity. MTBE is classified as an animal carcinogen (A3) by the ACGIH.

12. ECOLOGICAL INFORMATION (rev. Jan-04)

Keep out of sewers, drainage areas and waterways. Report spills and releases, as applicable, under Federal and State regulations. If released, oxygenates such as ethers and alcohols will be expected to exhibit fairly high mobility in soil, and therefore may leach into groundwater. The API (www.api.org) provides a number of useful references addressing petroleum and oxygenate contamination of groundwater.

13. DISPOSAL CONSIDERATIONS (rev. Dec-97)

Consult federal, state and local waste regulations to determine appropriate disposal options.

AMERADA HESS CORPORATION

MATERIAL SAFETY DATA SHEET

Gasoline, All Grades

MSDS No. 9950

14. TRANSPORTATION INFORMATION (rev. Jan-04)

DOT PROPER SHIPPING NAME: Gasoline
 DOT HAZARD CLASS and PACKING GROUP: 3, PG II
 DOT IDENTIFICATION NUMBER: UN 1203
 DOT SHIPPING LABEL: FLAMMABLE LIQUID

PLACARD:



15. REGULATORY INFORMATION (rev. Jan-04)

U.S. FEDERAL, STATE, and LOCAL REGULATORY INFORMATION

This product and its constituents listed herein are on the EPA TSCA Inventory. Any spill or uncontrolled release of this product, including any substantial threat of release, may be subject to federal, state and/or local reporting requirements. This product and/or its constituents may also be subject to other federal, state, or local regulations; consult those regulations applicable to your facility/operation.

CLEAN WATER ACT (OIL SPILLS)

Any spill or release of this product to "navigable waters" (essentially any surface water, including certain wetlands) or adjoining shorelines sufficient to cause a visible sheen or deposit of a sludge or emulsion must be reported immediately to the National Response Center (1-800-424-8802) or, if not practical, the U.S. Coast Guard with follow-up to the National Response Center, as required by U.S. Federal Law. Also contact appropriate state and local regulatory agencies as required.

CERCLA SECTION 103 and SARA SECTION 304 (RELEASE TO THE ENVIRONMENT)

The CERCLA definition of hazardous substances contains a "petroleum exclusion" clause which exempts crude oil, refined, and unrefined petroleum products and any indigenous components of such. However, other federal reporting requirements (e.g., SARA Section 304 as well as the Clean Water Act if the spill occurs on navigable waters) may still apply.

SARA SECTION 311/312 - HAZARD CLASSES

<u>ACUTE HEALTH</u>	<u>CHRONIC HEALTH</u>	<u>FIRE</u>	<u>SUDDEN RELEASE OF PRESSURE</u>	<u>REACTIVE</u>
X	X	X	--	--

SARA SECTION 313 - SUPPLIER NOTIFICATION

This product contains the following toxic chemicals subject to the reporting requirements of section 313 of the Emergency Planning and Community Right-To-Know Act (EPCRA) of 1986 and of 40 CFR 372:

INGREDIENT NAME (CAS NUMBER)	CONCENTRATION WT. PERCENT
Benzene (71-43-2)	0.1 to 4.9 (0.1 to 1.3 for reformulated gasoline)
Ethyl benzene (100-41-4)	< 3
n-Hexane (110-54-3)	0.5 to 4
Methyl-tertiary butyl ether (MTBE) (1634-04-4)	0 to 15.0
Toluene (108-88-3)	1 to 15
1,2,4- Trimethylbenzene (95-63-6)	< 6
Xylene, mixed isomers (1330-20-7)	1 to 15

US EPA guidance documents (www.epa.gov/tri) for reporting Persistent Bioaccumulating Toxics (PBTs) indicate this product may contain the following deminimis levels of toxic chemicals subject to Section 313 reporting:

INGREDIENT NAME (CAS NUMBER)	CONCENTRATION - Parts per million (ppm) by weight
Polycyclic aromatic compounds (PACs)	17
Benzo (g,h,i) perylene (191-24-2)	2.55
Lead (7439-92-1)	0.079

AMERADA HESS CORPORATION

MATERIAL SAFETY DATA SHEET

Gasoline, All Grades

MSDS No. 9950

CANADIAN REGULATORY INFORMATION (WHMIS)

Class B, Division 2 (Flammable Liquid)

Class D, Division 2A (Very toxic by other means) and Class D, Division 2B (Toxic by other means)

16. OTHER INFORMATION (rev. Jan-04)

NFPA® HAZARD RATING HEALTH: 1 Slight
FIRE: 3 Serious
REACTIVITY: 0 Minimal

HMIS® HAZARD RATING HEALTH: 1 * Slight
FIRE: 3 Serious
REACTIVITY: 0 Minimal
* CHRONIC

SUPERSEDES MSDS DATED: 12/30/97

ABBREVIATIONS:

AP = Approximately < = Less than > = Greater than
N/A = Not Applicable N/D = Not Determined ppm = parts per million

ACRONYMS:

ACGIH	American Conference of Governmental Industrial Hygienists	NTP	National Toxicology Program
AIHA	American Industrial Hygiene Association	OPA	Oil Pollution Act of 1990
ANSI	American National Standards Institute (212)642-4900	OSHA	U.S. Occupational Safety & Health Administration
API	American Petroleum Institute (202)682-8000	PEL	Permissible Exposure Limit (OSHA)
CERCLA	Comprehensive Emergency Response, Compensation, and Liability Act	RCRA	Resource Conservation and Recovery Act
DOT	U.S. Department of Transportation [General Info: (800)467-4922]	REL	Recommended Exposure Limit (NIOSH)
EPA	U.S. Environmental Protection Agency	SARA	Superfund Amendments and Reauthorization Act of 1986 Title III
HMIS	Hazardous Materials Information System	SCBA	Self-Contained Breathing Apparatus
IARC	International Agency For Research On Cancer	SPCC	Spill Prevention, Control, and Countermeasures
MSHA	Mine Safety and Health Administration	STEL	Short-Term Exposure Limit (generally 15 minutes)
NFPA	National Fire Protection Association (617)770-3000	TLV	Threshold Limit Value (ACGIH)
NIOSH	National Institute of Occupational Safety and Health	TSCA	Toxic Substances Control Act
NOIC	Notice of Intended Change (proposed change to ACGIH TLV)	TWA	Time Weighted Average (8 hr.)
		WEEL	Workplace Environmental Exposure Level (AIHA)
		WHMIS	Workplace Hazardous Materials Information System (Canada)

DISCLAIMER OF EXPRESSED AND IMPLIED WARRANTIES

Information presented herein has been compiled from sources considered to be dependable, and is accurate and reliable to the best of our knowledge and belief, but is not guaranteed to be so. Since conditions of use are beyond our control, we make no warranties, expressed or implied, except those that may be contained in our written contract of sale or acknowledgment.

Vendor assumes no responsibility for injury to vendee or third persons proximately caused by the material if reasonable safety procedures are not adhered to as stipulated in the data sheet. Additionally, vendor assumes no responsibility for injury to vendee or third persons proximately caused by abnormal use of the material, even if reasonable safety procedures are followed. Furthermore, vendee assumes the risk in their use of the material.

MATERIAL SAFETY DATA SHEET

SECTION I – PRODUCT INFORMATION

Product Name: Propane

Trade Name: LPG (Liquefied Petroleum Gas)

Chemical Formula: C₃H₈

WHIMIS Classification: Class A – Compressed Gas

Class B, Division I – Flammable Gas

Supplier:

Business:

Non Medical Emergency:

Uses and Occurrence: Propane is commonly used as fuel for heating, cooking, automobiles, forklift trucks, crop drying and welding and cutting operations. Propane is used in industry as a refrigerant, solvent and as a chemical feedstock.

CEPA: CANADIAN ENVIRONMENTAL PROTECTION ACT

All components of this product are either on the Domestic Substances List (DSL) or are exempt.

SECTION II – HAZARDOUS INGREDIENTS

Components	CAS Registry No.	Proportion of Product	LC50	LD50
Propane	74986	95% - 98%	N/A	N/A
Ethane	74840	3% - 5%	N/A	N/A
Butane	791068	1% - 3%	N/A	N/A
Iso-Butane	75285	0.1% - 0.3%	N/A	N/A
Methane	74828	0.1% - 0.2%	N/A	N/A

Note: Composition given is typical for Grade 1 Propane; exact composition will vary from shipment to shipment.

- Explanation for change – HD5 refers to American specification, Grade 1 is Canadian equivalent in CGSB 3.14 Standard

SECTION III – CHEMICAL AND PHYSICAL DATA

Form: While stored under pressure – liquid and/or vapor

Boiling Point: -42 °C atm

Freezing Point: -188 °C

Evaporation Rate: Rapid (Gas at Normal Ambient Conditions)

Vapor Pressure: 1,013 (kPa) @ 26.0 °C

Vapor Density: 1.52 (Air = 1)

Coefficient of Water/Oil Distribution: Not available

PH: Not available

Soluble in Water: 6.1% by Volume @ 17.8 °C and 753 mmHg

Specific Gravity: 0.51 (Water = 1)

Appearance: Colorless liquid and vapor while stored under pressure.

Colorless and odorless gas in natural state at any concentration.

Commercial propane has an odorant added which is commonly ethyl mercaptan which has an odor similar to boiling cabbage or rotten eggs.

Odor Threshold: 4800 PPM

See Note 1 - Odorants

SECTION IV – FIRE OR EXPLOSION HAZARD DATA

Flash Point: -103.4 °C **Method:** Closed Cup

Flammable Limits: Lower 2.4%, Upper 9.5%

Auto Ignition Temperature: 432 °C

Products Evolved Due to Heat or Combustion: Carbon monoxide can be produced when primary and secondary airs are deficient while combustion is taking place.

Fire and Explosive Hazards: Explosive air-vapor mixtures may form if allowed to leak to atmosphere.

Sensitivity to Impact: No

Sensitivity to Static Discharge: Yes

Fire Extinguishing Precautions: Use water spray to cool exposed cylinders or tanks. Do not extinguish fire unless the source of the escaping gas that is fuelling the fire can be turned off. Fire can be extinguished with carbon dioxide and/or dry chemical (BC). Container metal shells require cooling with water to prevent flame impingement and the weakening of metal. If weakening, the area must be evacuated. If gas has not ignited, liquid and vapor may be dispersed by water spray or flooding.

Special Fire Fighting Equipment: Protective clothing, hose monitors, fog nozzles, self contained breathing apparatus.

SECTION V – REACTIVITY DATA

Stability: Stable

Conditions to Avoid: Keep separate from oxidizing agents. Gas explodes spontaneously when mixed with chlorine dioxide.

Incompatibility: Remove sources of ignition and observe distance requirements for storage tanks

from combustible material, drains, and openings to buildings.

Hazardous Decomposition Products: Deficient primary and secondary air can produce carbon monoxide.

Hazardous Polymerization: Will not occur.

SECTION VI – TOXICOLOGICAL PROPERTIES OF MATERIAL

ACUTE EXPOSURE:

Eyes: As a gas, none, Liquid causes "cold burns".

Respiratory System: Little physiological effect at concentrations below 10,000 PPM. Higher concentrations may cause dizziness and unconsciousness due to asphyxiation. *SEE NOTE 2 – ASPHYXIANT.*

Chronic Exposure: There are not reported effects from long-term low-level exposure.

Other: Liquid can cause burns and frostbite if in direct contact with skin.

Sensitization Properties: Skin – unknown, Respiratory – unknown.

Carcinogenicity: Not determined. *SEE NOTE 3 (NORM).*

MEDIAN LETHAL DOSE:

Oral: Not applicable for gas.

Inhalation: Not determined.

Dermal: Not applicable for gas.

Other: Not determined.

IRRITATION INDEX:

Skin: No appreciable effect (gas).

Eyes: No appreciable effect (gas).

Symptoms of Exposure: Above 10,000 PPM – dizziness, stupor, unconsciousness. *SEE NOTE 2 attached.* American Conference of Governmental Industrial Hygienists (ACGIH) classifies propane as an asphyxiate; there is no recommended "Threshold Limit Value" (TLV).

Teratogenicity: Not determined.

Mutagenicity: Not determined.

SECTION VII – OCCUPATION CONTROL PROCEDURES

Eyes: Safety glasses, goggles, or face shield required when transferring product.

Skin: Insulated gloves if contact with liquid or liquid cooled equipment is expected. Wear gloves and long sleeves when transferring product.

Inhalation: In atmosphere, where the concentration of propane would reduce oxygen

level below 18% in inhaled air, self contained breathing apparatus required. *SEE NOTE 3 – (NORM).*

Ventilation: Explosion proof ventilation equipment required in confined spaces.

SECTION VIII – EMERGENCY AND FIRST AID PROCEDURES

FIRST AID:

Eyes: Should eye contact with liquid occur, flush eyes with lukewarm water for 15 minutes. Obtain immediate medical care.

Skin: In case of "Cold Burn" from contact with liquid, immediately place affected area in lukewarm water and keep at this temperature until circulation returns. If fingers or hands are frostbitten, have the victim hold his hand next to his body such as under the armpit. Obtain immediate medical care.

SPILL OR LEAK:

Eliminate leak if possible.

Eliminate source of ignition.

Ensure cylinder is upright.

Disperse vapors with hose streams using fog nozzles, watch for low area, as propane is heavier than air and can settle in low areas. Remain upwind of leak, keep people away.

Prevent vapor and/or liquid from entering into sewers, basements or confined areas.

SECTION IX – TRANSPORTATION, HANDLING AND STORAGE

- Transport and store cylinders and tanks secured in an upright position in a ventilated space, away from ignition sources (so relief valve is in contact with vapor space of cylinder or tank).
 - Cylinders that are not in use must have the valves in the closed position and be equipped with a protective cap or guard.
 - Do not store with oxidizing agents, oxygen or chlorine cylinders.
- Transport, handle and store according to applicable federal and provincial regulations (CGA B149.2). **SEE NOTE 4 – MAGNETIC RESIDUES.**

TDG Classification: 2.1 (gas)

TDG Shipping Name: Liquid Petroleum Gas (Propane)

TDG Special Provisions: 56, 90, and 102

PIN UN: 1075

SECTION X – PREPARTATION INFORMATION

Prepared by: Propane Gas Association of Canada
(403) 543-6500

Date prepared: March 2007

The information contained herein is believed to be accurate. It is provided independently of any sale of the product. It is not intended to constitute performance information concerning the product. No express warranty or implied warranty of merchantability or fitness for a particular purpose is made with respect to the product information contained herein.

This information is in addition to the information supplied on the MSDS and forms a part of the MSDS by reference to note numbers indicated:

NOTE 1 ODOURANTS:

Odorants are not completely effective warning agents in all cases. Certain odorants are polar and/or chemically reactive and may be depleted by reaction or absorption. Sensitivity to odorants differs from person to person and may decrease with age or impaired physical conditions such as colds or respiratory allergies. Prolonged exposure to odorants can create desensitization to the odor.

NOTE 2 ASPHYXIAN AND NARCOTIC EFFECTS OR PROPANE:

LPG's can displace air and can act as an asphyxiant. Lack of oxygen may cause dizziness, headaches, diminished awareness, faulty judgment, increase in fatigue and impaired muscular coordination. If these symptoms are identified while working in close proximity to propane that is released, go immediately into a fresh air environment.

LPG's are anaesthetic gases within the upper explosive limits and higher concentrations. A person working around propane in an enclosed space or in close proximity to a propane source such as filling cylinders, purging lines, investigating leaks, etc. who feels light-headed, dizzy, drunken, sleepy, or intoxicated should go immediately into fresh air. This narcotic effect may impair a person's judgment temporarily but will rapidly disappear in fresh air.

NOTE 3 NATURALLY OCCURRING RADIOACTIVE MATERIAL (NORM):

Sludges and tank scale from propane storage tanks, bulk delivery truck tanks, railway tank cars, and fuel filters and strainers screens may contain Naturally Occurring Radioactive Material (NORM) in the form of lead 210.

Equipment used for the transfer of propane such as propane piping and hoses, pumps and compressors may have detectable levels of radioactive lead 210 on inner surfaces.


Workers involved in cleaning, repair or maintenance on inner surfaces of such equipment should avoid breathing dust generated from such activities. Suitable codes of practice should be developed for the activities, detailing appropriate occupational hygiene and disposal practices.

NOTE 4 MAGNETIC RESIDUES IN PROPANE:

Magnetic residues generated in automotive fuel tanks from "mill scale" or corrosion processes may impair the operation of magnetic gauges and electronic solenoid valves.

Collection of gross amounts of solid residues can affect the proper operation of lock offs, mixers, pressure release valves, etc.

Solid residues could contain NORM (see note 3).



Health	2
Fire	2
Reactivity	0
Personal Protection	H

Material Safety Data Sheet Kerosene MSDS

Section 1: Chemical Product and Company Identification

Product Name: Kerosene

Catalog Codes: SLK1048

CAS#: 8008-20-6 or 64742-81-0

RTECS: OA5500000

TSCA: TSCA 8(b) inventory: Kerosene

CI#: Not available.

Synonym: Astral Oil; Coal Oil, Fuel Oil No. 5, Deobase, Astral Oil, Jet A Fuel; Jet Fuel JP-1; JP-5 Navy Fuel; Kerosine, petroleum; Range Oil; K1 Kerosene; Kerosene, hydrodesulfurized; Kerosine

Chemical Name: Kerosene

Chemical Formula: Not available.

Contact Information:

Sciencelab.com, Inc.
14025 Smith Rd.
Houston, Texas 77396

US Sales: 1-800-901-7247
International Sales: 1-281-441-4400

Order Online: ScienceLab.com

CHEMTREC (24HR Emergency Telephone), call:
1-800-424-9300

International CHEMTREC, call: 1-703-527-3887

For non-emergency assistance, call: 1-281-441-4400

Section 2: Composition and Information on Ingredients

Composition:

Name	CAS #	% by Weight
Kerosene	8008-20-6 or	100
	64742-81-0	

Toxicological Data on Ingredients: Kerosene: ORAL (LD50): Acute: 15000 mg/kg [Rat]. 20000 mg/kg [Guinea pig]. 2835 mg/kg [Rabbit].

Section 3: Hazards Identification

Potential Acute Health Effects:

Hazardous in case of skin contact (irritant), of eye contact (irritant), of ingestion, of inhalation. Slightly hazardous in case of skin contact (permeator). Severe over-exposure can result in death.

Potential Chronic Health Effects:

Slightly hazardous in case of skin contact (sensitizer).
CARCINOGENIC EFFECTS: Not available.
MUTAGENIC EFFECTS: Mutagenic for bacteria and/or yeast.
TERATOGENIC EFFECTS: Not available.

DEVELOPMENTAL TOXICITY: Not available.

The substance is toxic to the nervous system.

The substance may be toxic to blood, kidneys, liver, central nervous system (CNS).

Repeated or prolonged exposure to the substance can produce target organs damage. Repeated exposure to a highly toxic material may produce general deterioration of health by an accumulation in one or many human organs.

Section 4: First Aid Measures

Eye Contact:

Check for and remove any contact lenses. In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Get medical attention.

Skin Contact:

In case of contact, immediately flush skin with plenty of water. Cover the irritated skin with an emollient. Remove contaminated clothing and shoes. Wash clothing before reuse. Thoroughly clean shoes before reuse. Get medical attention.

Serious Skin Contact:

Wash with a disinfectant soap and cover the contaminated skin with an anti-bacterial cream. Seek immediate medical attention.

Inhalation:

If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention immediately.

Serious Inhalation:

Evacuate the victim to a safe area as soon as possible. Loosen tight clothing such as a collar, tie, belt or waistband. If breathing is difficult, administer oxygen. If the victim is not breathing, perform mouth-to-mouth resuscitation. **WARNING:** It may be hazardous to the person providing aid to give mouth-to-mouth resuscitation when the inhaled material is toxic, infectious or corrosive. Seek immediate medical attention.

Ingestion:

If swallowed, do NOT induce vomiting. If swallowed, do not induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Loosen tight clothing such as a collar, tie, belt or waistband. Get medical attention immediately.

Serious Ingestion: Not available.

Section 5: Fire and Explosion Data

Flammability of the Product: Flammable.

Auto-Ignition Temperature: 210°C (410°F)

Flash Points: CLOSED CUP: 38°C (100.4°F). (Tagliabue.)

Flammable Limits: LOWER: 0.7% UPPER: 5% - 7%

Products of Combustion: Not available.

Fire Hazards in Presence of Various Substances: Flammable in presence of open flames and sparks, of heat.

Explosion Hazards in Presence of Various Substances:

Risks of explosion of the product in presence of mechanical impact: Not available.

Risks of explosion of the product in presence of static discharge: Not available.

Fire Fighting Media and Instructions:

Flammable liquid, insoluble in water.

SMALL FIRE: Use DRY chemical powder.

LARGE FIRE: Use water spray or fog. Cool containing vessels with water jet in order to prevent pressure build-up, autoignition or explosion.

Special Remarks on Fire Hazards: Not available.

Special Remarks on Explosion Hazards: Not available.

Section 6: Accidental Release Measures

Small Spill: Absorb with an inert material and put the spilled material in an appropriate waste disposal.

Large Spill:

Toxic flammable liquid, insoluble or very slightly soluble in water. Poisonous liquid.

Keep away from heat. Keep away from sources of ignition. Stop leak if without risk. Absorb with DRY earth, sand or other non-combustible material. Do not get water inside container. Do not touch spilled material. Use water spray to reduce vapors. Prevent entry into sewers, basements or confined areas; dike if needed. Call for assistance on disposal.

Section 7: Handling and Storage

Precautions:

Keep locked up.. Keep away from heat. Keep away from sources of ignition. Ground all equipment containing material. Do not ingest. Do not breathe gas/fumes/ vapor/spray. Wear suitable protective clothing. In case of insufficient ventilation, wear suitable respiratory equipment. If ingested, seek medical advice immediately and show the container or the label. Avoid contact with skin and eyes. Keep away from incompatibles such as oxidizing agents.

Storage:

Store in a segregated and approved area. Keep container in a cool, well-ventilated area. Keep container tightly closed and sealed until ready for use. Avoid all possible sources of ignition (spark or flame).

Section 8: Exposure Controls/Personal Protection

Engineering Controls:

Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapors below their respective threshold limit value. Ensure that eyewash stations and safety showers are proximal to the work-station location.

Personal Protection:

Splash goggles. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Vapor respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

Exposure Limits: Not available.

Section 9: Physical and Chemical Properties

Physical state and appearance: Liquid. (Oily liquid.)

Odor: Not available.

Taste: Not available.

Molecular Weight: Not available.

Color: Yellow. Clear (Light.)

pH (1% soln/water): Not applicable.

Boiling Point: 149°C (300.2°F) - 325 C

Melting Point: Not available.

Critical Temperature: Not available.

Specific Gravity: 0.775 - .840(Water = 1)

Vapor Pressure: 0.1 kPa (@ 20°C)

Vapor Density: 4.5 (Air = 1)

Volatility: Not available.

Odor Threshold: Not available.

Water/Oil Dist. Coeff.: Not available.

Ionicity (in Water): Not available.

Dispersion Properties: Not available.

Solubility:

Insoluble in cold water, hot water.

Miscible with other petroleum solvents

Section 10: Stability and Reactivity Data

Stability: The product is stable.

Instability Temperature: Not available.

Conditions of Instability: Heat, ignition sources (sparks, flames), incompatible materials

Incompatibility with various substances: Reactive with oxidizing agents.

Corrosivity: Not considered to be corrosive for metals and glass.

Special Remarks on Reactivity: Not available.

Special Remarks on Corrosivity: Not available.

Polymerization: Will not occur.

Section 11: Toxicological Information

Routes of Entry: Absorbed through skin. Eye contact.

Toxicity to Animals: Acute oral toxicity (LD50): 2835 mg/kg [Rabbit].

Chronic Effects on Humans:

MUTAGENIC EFFECTS: Mutagenic for bacteria and/or yeast.

Causes damage to the following organs: the nervous system.

May cause damage to the following organs: blood, kidneys, liver, central nervous system (CNS).

Other Toxic Effects on Humans:

Hazardous in case of skin contact (irritant), of ingestion, of inhalation (lung irritant).
Slightly hazardous in case of skin contact (permeator).

Special Remarks on Toxicity to Animals: Not available.

Special Remarks on Chronic Effects on Humans: May affect genetic material (mutagenic)

Special Remarks on other Toxic Effects on Humans:

Acute Potential Health Effects:

Skin: Causes moderate to severe skin irritation. It can cause defatting dermatitis.

Eyes: May cause eye irritation.

Inhalation: May cause respiratory tract and mucous membrane irritation and a burning sensation in the chest.

Because of its relatively low volatility, overexposure by inhalation is uncommon, but it can occur in poorly ventilated areas or by inhalation of mists or aerosols. Symptoms of inhalation overexposure include central nervous system (CNS) depression (transient euphoria, headache, irritability, excitement, ringing in the ears, weakness, incoordination, confusion, disorientation, drowsiness, tremor, somnolence, hallucinations, seizures, coma, death).

May affect the heart (cardiac arrhythmias), liver, kidneys, and respiration (asphyxia, apnea, acute pulmonary edema, dyspnea, fibrosis, or cyanosis)

Ingestion: Causes gastrointestinal tract irritation with burning sensation in mouth, esophagus, and stomach, abdominal pain, nausea, vomiting, hypermotility, diarrhea, headache, malaise. May affect

respiration/trachea/bronchi through accidental pulmonary aspiration which can cause hypoxia, chemical pneumonitis, and noncardiogenic pulmonary edema, pulmonary hemorrhage, coughing, breathing difficulty, acute or chronic pulmonary edema, emphysema, respiratory stimulation. It may also affect the heart (dysrhythmias, myocardial depression, tachycardia), liver, endocrine system (pancreas - hypoglycemia), behavior/central nervous system (symptoms similar to that of inhalation).

Chronic Potential Health Effects:

Inhalation: Repeated or prolonged inhalation may cause respiratory tract irritation and affect behavior/central nervous system with symptoms similar to that of acute inhalation. It may also affect the blood (changes in white blood cell count, changes in serum composition, pigmented or nucleated red blood cells, leukopenia, normocytic anemia), cardiovascular system, respiratory system (trachea, bronchi), and may cause kidney damage.

Ingestion: Repeated or prolonged ingestion may affect the liver, endocrine system (adrenal gland, pancreas, spleen), and metabolism (weight loss), and blood.

Skin: Repeated or prolonged skin contact may cause defatting dermatitis, erythema, and eczema-like skin lesions, drying and cracking of the skin, and possible burns.

Section 12: Ecological Information

Ecotoxicity: Not available.

BOD5 and COD: Not available.

Products of Biodegradation:

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

Toxicity of the Products of Biodegradation: Not available.

Special Remarks on the Products of Biodegradation: Not available.

Section 13: Disposal Considerations

Waste Disposal:

Waste must be disposed of in accordance with federal, state and local environmental control regulations.

Section 14: Transport Information

DOT Classification: CLASS 3: Flammable liquid.

Identification: : Kerosene UNNA: 1223 PG: III

Special Provisions for Transport: Not available.

Section 15: Other Regulatory Information

Federal and State Regulations:

Connecticut hazardous material survey.: Kerosene
Rhode Island RTK hazardous substances: Kerosene
Pennsylvania RTK: Kerosene
Massachusetts RTK: Kerosene
Massachusetts spill list: Kerosene
New Jersey: Kerosene
TSCA 8(b) inventory: Kerosene

Other Regulations:

OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200).
EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

Other Classifications:

WHMIS (Canada):

CLASS B-3: Combustible liquid with a flash point between 37.8°C (100°F) and 93.3°C (200°F).
CLASS D-2B: Material causing other toxic effects (TOXIC).

DSCL (EEC):

R10- Flammable.
R65- Harmful: may cause lung damage if swallowed.
S23- Do not breathe gas/fumes/vapour/spray
S24- Avoid contact with skin.
S62- If swallowed, do not induce vomiting: seek medical advice immediately and show this container or label.

HMIS (U.S.A.):

Health Hazard: 2

Fire Hazard: 2

Reactivity: 0

Personal Protection: h

National Fire Protection Association (U.S.A.):

Health: 0

Flammability: 2

Reactivity: 0

Specific hazard:

Protective Equipment:

Gloves.
Lab coat.
Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate.
Splash goggles.

Section 16: Other Information

References: Not available.

Other Special Considerations: Not available.

Created: 10/09/2005 05:54 PM

Last Updated: 10/09/2005 05:54 PM

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.

