



SPILL CONTINGENCY PLAN BAFFIN GOLD PROPERTY KIVALLIQ ENERGY CORPORATION

Prepared By: Andrew Berry, Chief Operating Officer

Effective Date: June 1, 2017

Table of Contents

1. Introduction	1
1.1. Corporate Details	1
1.2. Purpose and Scope.....	1
1.3. Environmental Policy	1
1.4. Project Description.....	2
1.5. Hazardous Materials On-Site	3
2. Predicted Environmental Impacts	3
3. Preventative Measures.....	3
3.1. Petroleum and Chemical Product Storage and Inventory	4
3.2. Petroleum Product Transfer	4
3.3. Spill Kit Equipment.....	5
4. Response Organization	6
4.1. Basic Steps - Spill Procedure.....	7
4.2. Basic Steps - Chain of Command.....	7
4.3. Spill Response/Reporting Contact Information	7
4.4. Communications	8
5. Action Plan	9
5.1. Potential Spill Hazards	9
5.2. Initial Action Procedures.....	9
5.3. Spill Response Actions – Diesel Fuel, Jet Fuel, Hydraulic Oil & Lubrication Oil	10
5.4. Spill Response Actions - Propane	11
6. Training.....	12

Appendices

Appendix I:	Maps & Figures
Appendix II:	Spill Report Form
Appendix III:	Completing the Spill Report Form
Appendix IV:	MSDS Sheets



1. Introduction

This Spill Contingency Plan shall be in effect from February 1, 2017 and has been specifically prepared for the Baffin Gold Property, Qikiqtani Region, Nunavut. A copy of this plan will be kept in the office at site and at the head office in Vancouver. Copies of this plan may be obtained from Kivalliq Energy Corporation.

1.1. Corporate Details

Kivalliq Energy Corporation
Suite 1020- 800 West Pender Street
Vancouver, British Columbia, V6C 2V6
Tel: (604) 646-4527
Fax: (604) 646-4526
www.kivalliqenergy.com

1.2. Purpose and Scope

This Spill Contingency Plan provides response procedures in the event of a spill and includes procedures for proper storage and handling of fuels and other hazardous materials. The plan is designed to provide clear on-site instructions for responding to a spill while ensuring the safety of all personnel. This document provides detailed information about the equipment and contingencies in place on the project and the preventative measures outlined to promote safe handling of potentially hazardous materials. It details procedures that aim to minimize environmental impacts of spills, outline spill reporting protocol and comply with government regulations.

1.3. Environmental Policy

Kivalliq Energy endeavours to take every reasonable precaution toward ensuring the protection and conservation of the natural environment and the safety and health of all employees and contractors from any potential harmful effects of stored materials and operations.

The company's environmental policy includes:

- Ensuring all personnel and contractors adhere to Kivalliq Energy's environmental policies.
- Minimizing the risks to the health and safety of all employees.
- Complying with all applicable environmental legislation and regulations.
- Advancing the project in a socially responsible manner that includes community consultation.
- Cooperate with relevant regulatory bodies and governments on all aspects of environmental protection and policy.
- All plans, licences and permits will be reviewed with employees and contractors when hired and copies of the plans will be available in the office tent for reference.
- Company plans include: Spill Contingency Plan, Fuel Management Plan, Emergency Response Plan, Field Safety Manual, Environmental and Wildlife Management Plan, Waste Management Plan and Abandonment and Restoration Plan.

1.4. Project Description

The Baffin Gold Property on Baffin Island in the Qikiqtani Region of Nunavut consists of 15 prospecting permits, 6 mineral claims and two Mineral Exploration Agreements (MEA's) with Nunavut Tunngavik Inc. (NTI) on Inuit Owned Land Parcel BI-35. It is 260 kilometres southwest of Clyde River and 360 kilometres northwest of Qikiqtarjuaq. The property measures approximately 160 kilometres in an east-west direction by approximately 30 kilometres north-south and comprises a total area of 408,981.6 hectares (Appendix I).

All prospecting permits, mineral claims and the MEA's are contiguous and extend north, south, east and west between Latitudes 68.375° and 68.75° North and Longitudes 70.5° and 74.5° West in NTS map areas 027 B/05, 027 B/12, 027 B/11, 037 A/06, 037 A/07, 037 A/08, 037 A/09 and 037 A/10 (UTM coordinates: 7,584,000mN to 7,615,000mN and 520,500mE to 622,500mE, NAD83, Zone 18 and 7,586,000mN to 7,628,500mN and 377,500mE to 439,500mE Zone 19).

Kivalliq Energy intends to utilize Commander Resources Ltd.'s existing Dewar Lakes Camp (Permits Pending) on Crown lands administered by INAC to facilitate the program. The camp is located at 68°37'59" N, 71°06'38" W and operated seasonally from 2003 to 2011 but has been unoccupied since 2013. In June 2017, Commander will mobilize a crew to rehabilitate the camp and prepare it to accommodate field personnel. As the permittee, Commander Resources Ltd. has a separate Spill Contingency Plan in place for the Dewar Lakes Camp.

Due to the size of the property, Kivalliq is permitting two temporary fly camps to accommodate workers and provide effective daily access to and from priority target areas that are remote from the Dewar Lakes Camp location. The proposed Malrok Fly Camp will be located adjacent to Malrok Lake on IOL BI-35 on Inuit Owned Lands administered by QIA at 68° 30' 06" N Lat., 72° 27' 08" W Long. The proposed Tuktu Fly Camp will be located on Crown lands proximal to the Fox-3 Airstrip and adjacent to Nadluardjuk Lake at 68° 37' 10" N Lat., 73° 12' 45" W Long.

The temporary fly camps will accommodate up to 15 people and will be comprised of: 1 kitchen tent, 1 office tent, 1 dry tent, 1 utility tent, 5 supplementary sleep tents, a Pacto or outhouse latrine facility, a portable fuel-fired incinerator and a small generator shed. The structures will consist of a combination of WeatherPort vinyl tents, canvas prospectors' tents and small plywood structures. These camps will be fully closed and dismantled completely once exploration activities cease. The sites will then be reclaimed and restored to their original state.

1.5. Hazardous Materials On-Site

Anticipated hazardous materials to be located at the Temporary Fly Camps on the Baffin Gold Property include:

Table 1: Proposed Hazardous Materials On-Site

Material	Container	Quantity On-Site	Location
Diesel	205 litre drum	23	Main Fuel Cache
Jet Fuel (A/B)	205 litre drum	25	Main Fuel Cache
Propane	100 lb. cylinder	10	Main Fuel Cache
Gasoline	205 litre drum	2	Main Fuel Cache
Hydraulic Oil	1 L container	8	Utility Shed
Motor oil	1 L container	16	Utility Shed
Cleaning Products	1 L container	2	Kitchen Tent

Refer to Appendix I for the proposed fly camp layout. Material Safety Data Sheets (MSDS's) for each hazardous material are included in an Appendix IV.

2. Predicted Environmental Impacts

All hazardous materials pose a threat to the environment if spilled. The following list outlines potential environmental impacts of hazardous materials stored on site:

- Gasoline may be harmful to wildlife and aquatic life. It is not readily biodegradable and has the potential for bioaccumulation in the environment. Gasoline volatilizes quickly and can be explosive and a fire hazard in the event of a spill.
- Diesel may be harmful to wildlife and aquatic life. It is not readily biodegradable and has the potential for bioaccumulation in the environment. Diesel volatilizes comparatively slowly but represents a fire hazard in the event of a spill.
- Jet fuel may be harmful to wildlife and aquatic life. It is not readily biodegradable and has the potential for bioaccumulation in the environment. Jet fuel volatilizes relatively quickly and represents a fire hazard in the event of a spill.
- Propane may be harmful to wildlife and the surrounding environment, and it has the potential to accumulate in the environment. Propane is highly volatile. In the event of a spill it represents an extreme explosive hazard.
- Oils and greases may be harmful to wildlife and aquatic life. They are not readily biodegradable, their volatility is low and they have the potential for bioaccumulation in the environment.

3. Preventative Measures

The following actions illustrate a proactive approach to environmental stewardship. In addition, these actions minimize the potential for spills during fuel storage, handling and transfer and will prevent any chemicals, petroleum products or wastes from entering any water bodies.

3.1. Petroleum and Chemical Product Storage and Inventory

Remote fuel caches will be stored in accordance with approved methods of storage of drummed product. Inspections of the fuel caches will be conducted during each visit. There will be a spill kit at each fuel cache location.

Fuel and Chemical Storage

- All fuels and other hazardous materials will be stored in secondary containment (“berms”).
- All secondary containment will be capable of holding 110 percent of the volume of the largest fuel reservoir that is housed within the secondary containment.
- All secondary containment will be of sufficient height and depth to hold any potential spill or failure.
- Secondary containment berms will be made of material (Arctic Grade) that is sufficiently durable to withstand Nunavut’s climate and the natural terrain.
- Secondary containment berms will be equipped with hydrocarbon filtration systems (rain drains) to safely remove water that is collected inside the berms.
- Secondary containment berms will be inspected daily during operations.
- Within the secondary containment berms fuel drums will be stored in rows on their sides with bungs facing at the 3:00 and 9:00 position.
- All drums, tanks and hoses will be regularly inspected for leaks.
- Propane cylinders will be stored standing up and away from any potential sources of ignition.
- Drummed fuel used for heating tents will be placed in secondary containment.
- All fuel storage sites will be located a minimum of 31 metres from the normal high-water mark of any water body and will be inspected regularly.
- Spill Kits will be placed and will be easily identifiable with clear signage at each fuel storage site.
- “NO SMOKING” signs will be erected at each fuel storage area.
- Smoking, open flame and any potential sources of ignition are prohibited within 31 metres of any fuel storage site.
- Empty fuel drums will be removed from site regularly.

Hazardous materials that may be located on the Baffin Gold Property include small amounts of hydrochloric acid, cleaners, batteries, electronics, fluorescent light bulbs/tubes, motor oil and hydraulic oil. Materials will be stored in their original containers.

A limited inventory of motor oil and hydraulic oil will be located in the utility tent at the temporary field camp. These products typically come in 1 litre or 4 litre jugs and will be stored in a drip tray with a spill kit nearby. Hydrochloric acid is used for core logging in very small amounts (<0.5 litre) and will be kept in a sealed container in the core shack. Cleaners (solvents) will be kept in a designated area in their original containers. Cleaners, batteries and fluorescent light bulbs/tubes will be kept in their original containers.

3.2. Petroleum Product Transfer

Manual and automatic pumps will be used for the transfer of petroleum products. Smoking, sparks, or open flames are **prohibited** in fuel storage and re-fueling areas at all times.

A spill kit will be placed with clear signage in all areas of fuel storage and re-fueling. When re-fueling from drums those drums will be placed upon platforms underlain by a secondary containment structure.

Preventative mitigation measures include:

Handling and Transfer

- Fuel transfer hoses with cam lock mechanisms to prevent leakage are used.
- Fuel absorbent pads are placed appropriately to protect from drips and spills.
- Personnel will carefully monitor fuel content in the receiving vessel during transfer and always have absorbent pads available while transferring fuel.
- Any drips or leakages are cleaned immediately.
- All operating personnel will be trained in proper fuel handling and spill response procedures.
- Smoking, open flame and any potential sources of ignition are prohibited within 31 metres of any fuel storage site and fuel transfer locations.
- “NO SMOKING” signs will be erected at each fuel transfer area.
- Equipment maintenance and servicing will be conducted in designated areas. Equipment will be underlain by absorbent pads and spill trays for lubricant changes.
- Funnels will be used to reduce the potential for spillage.
- Waste oils and fluids will be collected in sealed 20 litre pails and will be labelled appropriately and stored in secondary containment berms.
- Empty fuel drums will be removed from site regularly.
- All other transfers will be completed within designated areas within in secondary containment. When secondary containment is not practical (e.g. adding hydraulic oil to the helicopter), absorbent pads will be used to protect from drips and spills.

3.3. Spill Kit Equipment

Complete spill kits are kept on hand at all camps. Spill kits contain:


- 1 – 360 litre/79 gallon polyethylene over-pack drum
- 4 – Oil sorbent booms (5” X 10’)
- 100 – Oil sorbent sheets (16.5” X 20” X 3/8”)
- 1 – Drain cover (36” X 36” X 1/16”)
- 1 – Caution tape (3” X 500’)
- 1 – 1 lb. plugging compound
- 2 – Pairs Nitrile gloves
- 2 – Pairs Safety goggles
- 2 – Pairs Tyvek coveralls
- 1 – Instruction booklet
- 10 – Printed disposable bags (24” X 48”)
- 1 – Shovel

In the event a damaged or leaking drum is noted, at least one empty fuel drum in good condition will be located at each fuel cache to facilitate a transfer of contents into a secure container. Extra absorbent pads will be kept with the helicopter and in any area where re-fueling, transferring and/or handling is done.

4. Response Organization

In the case of any spill or other environmental emergency, it is necessary to react in the most immediate, safe, and environmentally responsible manner. No spill or incident is so minor that it can be ignored and every spill that meets the guideline threshold must be reported. Communications are essential when located in a remote area. A summary of available communication equipment is provided in section 4.4.

The follow flow chart depicts spill response organization, as well as the chain of command for responding to a spill or release.

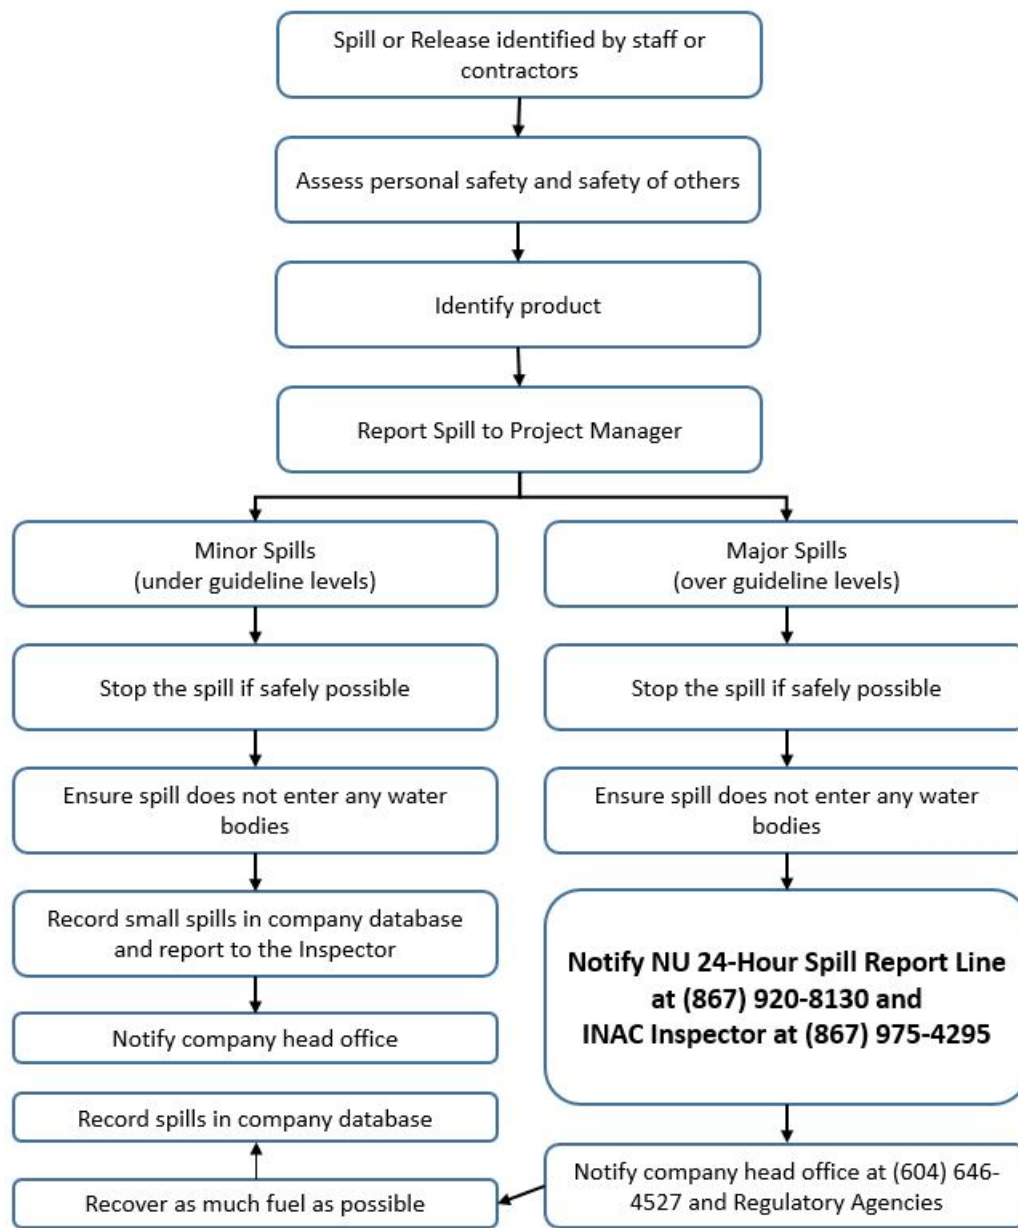

4.1. Basic Steps - Spill Procedure

The basic steps of the response plan are as follows:

1. Ensure the safety of all persons at all times.
2. Identify and find the spill substance and its source, and, if possible, stop the process or shut off the source.
3. Inform the Project Manager or his/her designate at once, so that he/she may take the appropriate actions. Appropriate action includes the notification of the spill to the 24 hour Spill Line and INAC Water Resource Officer. A copy of the Spill Report form can be found in **Appendix II**.
4. Contain the spill or environmental hazard, as per its nature, and as per the advice of the Spill Line and the INAC Water Resource Officer as required.
5. Implement any necessary cleanup and/or remedial action.

4.2. Basic Steps - Chain of Command

1. Immediately notify and report to the 24-Hour Spill Line at (867) 920-8130, the INAC Water Resources Inspector/Manager of Field Operations in Nunavut at (867) 975-4295, Environment Canada personnel at 867-766-3737, and the Qikiqtani Inuit Association Land Inspector at (867) 975-8400.
2. A **Spill Report Form (Appendix II)** is filled out as completely as possible before or after contacting the 24 Hour Spill Line. A copy of the guidelines for completing the spill report form can be found in Appendix III.
3. Notify Jeff Ward, President at (604) 646-4538 or Andrew Berry, COO at (604) 646-4529.

4.3. Spill Response/Reporting Contact Information

CONTACT	TELEPHONE NUMBER
24 Hour Spill Report Line	(867) 920-8130
Jeff Ward, President, Kivalliq Energy Corp.	(604) 646-4538 (office) (604) 763-8723 (cell)
Andrew Berry, COO, Kivalliq Energy Corp.	(604) 646-4529 (office) (604) 765-1892 (cell)
Emily McNie, Project Supervisor, Kivalliq Energy Corp.	(604) 646-8352 (office)
INAC Water Resource Officer, Iqaluit or INAC Manager of Field Operations	(867) 975-4295
Environment Canada	(867) 975-4644 24hr page: (867) 766-3737
Government of Nunavut-Department of Environment	(867) 975-7700 (Iqaluit) TDB (Community)
Robert Eno , Manager Pollution Control/Air Quality, GN	(867) 975-7748
Qikiqtani Inuit Association	(867) 975-8400
Department of Fisheries and Oceans (Iqaluit)	(867) 979-8000
Air Tindi	(867) 669-8212
Yellowknife Fire Department	(867) 873-2222

CONTACT	TELEPHONE NUMBER
RCMP	(867) 924-0123 (Clyde River) (867) 928-0123 (Hall Beach)
Stanton Regional Hospital – Yellowknife	(867) 920-4111
Discovery Mining Services	(867) 920-4600
Nunavut Water Board	(867) 360-6338
Fisheries & Oceans Canada Habitat Impact Assessment Biologist	(867) 979-8007

The Project Manager will be available **24 hours a day** at camp at TBD during operations. The camp office number will be updated once communications are established at the beginning of operations.

4.4. Communications

Communications are essential when using isolated camps with aircraft support. Crew members must be taught how to use all of the communication equipment in camp. There are three types of communication used at the Dewar Lake Camp: Infosat digital satellite data / phone link, Iridium satellite phones and hand held VHF radios. The worker should ensure that they know how to operate all three communication systems as well how to summon assistance on each different piece of equipment in the event of an emergency. A summary of communication equipment procedures is below.

To use the Infosat satellite phone: (Digital data / phone link - base camp system)

- Dial as for a regular push button telephone.

To use an Iridium satellite phone:

- Press power button to turn unit.
- Unfold antenna and allow it to stand vertically.
- Ascertain 3 to 5 bar signal strength.
- Dial as for a regular push button telephone.
- Press send.

Hand held VHF radio: (personal communication with appropriate frequencies)

- Channels will be established and designated during field operations.
- Press transmit button on side of unit to talk.
- Remove pressure from transmit button to receive.

5. Action Plan

5.1. Potential Spill Hazards

The following is a list of potential spill hazards:

- Drummed products have the potential to leak or rupture. This includes drums of Jet A, Diesel, Gasoline, Waste Fuel, and Waste Oil. Ensure bungs are sealed properly.
- Propane cylinder leaks may occur at the valves. All cylinders are secured at all times. Full fuel cylinders are always stored in the upright position.
- Wheeled vehicles and equipment, aircraft (fixed and rotary wing), snowmobiles, generators, pumps. Incidents involving leaking or dripping fuels and oils may occur due to malfunctions, impact damage, and lack of regular maintenance, improper storage, or faulty operation.

Regular inspection and maintenance in accordance with recognized and accepted standard practices at all camps and fuel caches, reduces risks associated with the categories listed above.

Spill response training is provided to all personnel with particular attention to those personnel who handle fuels and other petroleum products. This training will include a presentation, review of spill kit contents and their use and reporting.

Spill Kits will be located at all camps, fuel caches and drill shacks. A description of contents is listed in Section 3.3.

5.2. Initial Action Procedures

1. First steps to take when a spill occurs:
 - a) Ensure your own safety and that of others around you, beginning with those nearest to the scene.
 - b) Control danger to human and aquatic life.
 - c) Identify the source of the spill.
 - d) Notify your supervisor, request assistance if needed.
 - e) Assess whether or not the spill can be readily and safely stopped.
 - f) Contain or stop the spill at the source.
2. Secondary steps to take:
 - a) Determine status of the spill event.
 - b) If necessary, pump fuel from a damaged and/or leaking tank or drum into a refuge container.
 - c) Notify the 24-hour Spill Report Line, and receive further instructions from the appropriate contact agencies listed in *Section 4.3*. (Disposal of contaminated soil or ice/snow in sealed containers for removal from site, etc.).
 - d) Complete and Fax a copy of the Spill Report Form (*Appendix II*).
 - e) Notify permitting authorities.
 - f) If possible, resume cleanup and containment.

5.3. Spill Response Actions – Diesel Fuel, Jet Fuel, Hydraulic Oil & Lubrication Oil

Take action only if safety permits – stop the source flow if safe to do so and eliminate all ignition sources. **Never smoke** when dealing with these types of spills.

On Land

Build a containment berm using soil material or snow and place a plastic tarp at the foot of the berm for easy capture of the spill after all vapours have dissipated.

Remove the spill by using absorbent pads or excavating the soil, gravel or snow. Remove spill splashed on vegetation using particulate absorbent material.

Contact regulatory agencies for approval before commencing removal of any soil, gravel, or vegetation.

On Muskeg

Do not deploy personnel and equipment on marsh or vegetation.

Remove pooled oil with sorbent pads and/or skimmer.

Flush with low pressure water to herd oil to collection point. Burn only in localized areas, e.g., trenches, piles or windrows. Do not burn if root systems can be damaged (low water table). Minimize damage caused by equipment and excavation.

On Water

Contain spill as close to release point as possible.

Use containment boom to capture spill for recovery after vapours have dissipated. Use absorbent pads to capture small spills.

Use skimmer for larger spills.

On Ice and Snow

Build a containment berm around spill using snow.

Remove spill using absorbent pads or particulate sorbent material.

The contaminated ice and snow must be scraped and shovelled into plastic buckets with lids, 205 litre drums, and/or polypropylene bags.

Storage and Transfer

All contaminated water, ice, snow, soil, and clean up supplies will be temporarily stored in closed, labelled containers. All containers will be stored in a well-ventilated area away from incompatible materials.

Disposal

Any contaminated material will be shipped from site to an appropriate and approved facility. The DOE monitors the movement of hazardous wastes from generators, carriers to receivers, through a tracking document (Waste Manifest). A Waste Manifest will accompany all movements. Kivalliq Energy Corp. has a

waste generator number (NUG 100036) and is registered at DOE with Robert Eno at reno@gov.nu.ca or (867) 975-7748.

Bioremediation

At the advice, discretion and approval of land use inspectors and permitting or licensing authorities' bioremediation, or land farming, may be implemented to treat certain contaminated soils temporarily contained in sealed drums on the property. Bioremediation is performed in biotreatment cells or the upper soil zone. Contaminated soils or sediments are incorporated into non contaminated soils and periodically turned over or tilled to aerate the mixture.

5.4. Spill Response Actions - Propane

Take action only if safety permits – stop the source flow if safe to do so and eliminate all ignition sources. **Never smoke** when dealing with these types of spills.

On Land

Do not attempt to contain the propane release.

On Water

Do not attempt to contain the propane release.

On Ice and Snow

Do not attempt to contain the propane release.

General

It is not possible to contain vapours when released.

Water spray can be used to knock down vapours if there is no chance of ignition. Small fires can be extinguished with dry chemical or CO₂.

Personnel should withdraw immediately from area unless a small leak is stopped immediately after it has been detected.

If tanks are damaged, gas should be allowed to disperse and no recovery attempt should be made. Personnel should avoid touching release point on containers since frost forms very rapidly.

Keep away from tank ends.

Storage and Transfer

It is not possible to contain vapours when released.


6. Training

All employees and contractors are required to be familiar with the Baffin Gold Property Spill Contingency Plan, and will also be trained for initial spill response methods.




All employees and contractors of Kivalliq Energy will be trained in internal policies, management plans, standard operating procedures and made familiar with the Terms and Conditions of the project's licences and permits. Every person arriving at the Baffin Gold Property will undergo an orientation session which includes information on health, safety, and environmental responsibilities and stewardship.


Appendix I

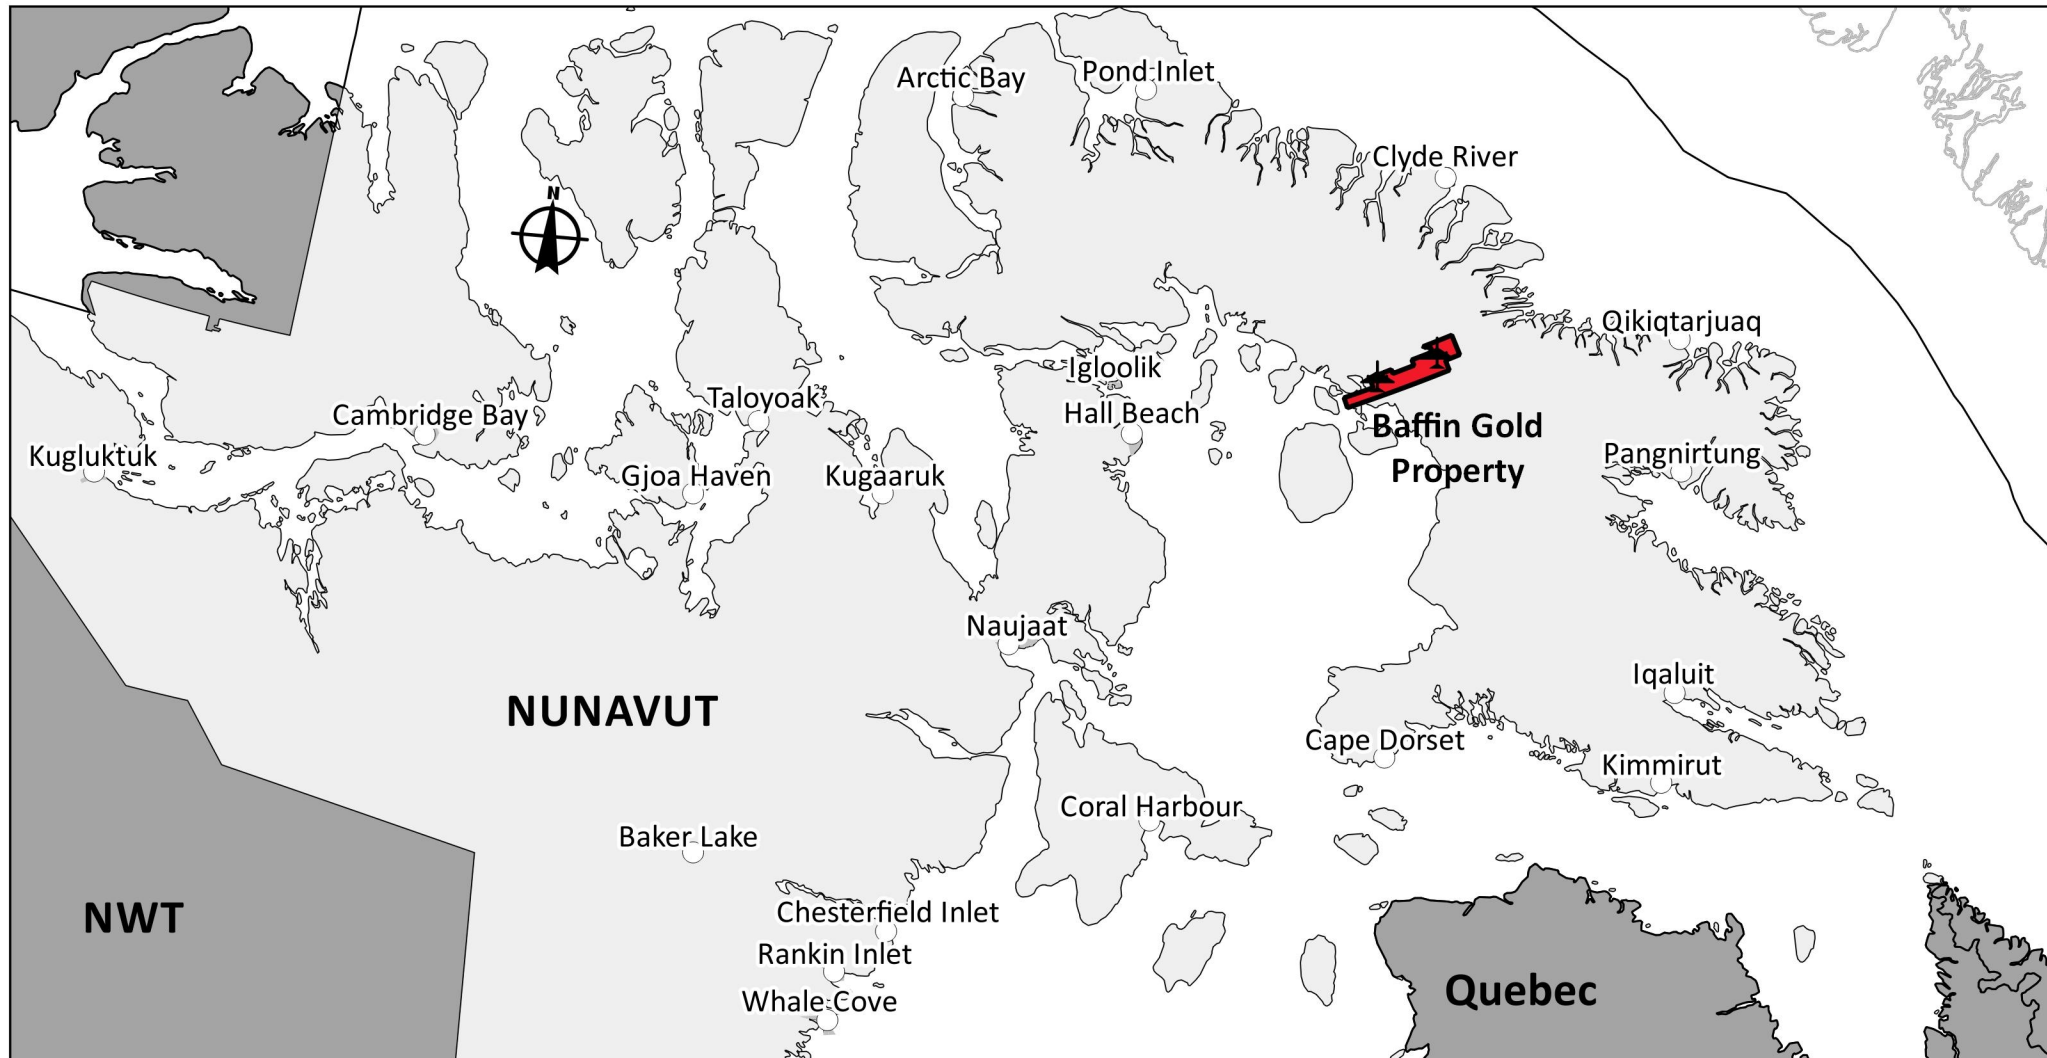Maps & Figures



Legend

-  Baffin Gold Property
-  Nunavut Communities
-  Airstrip

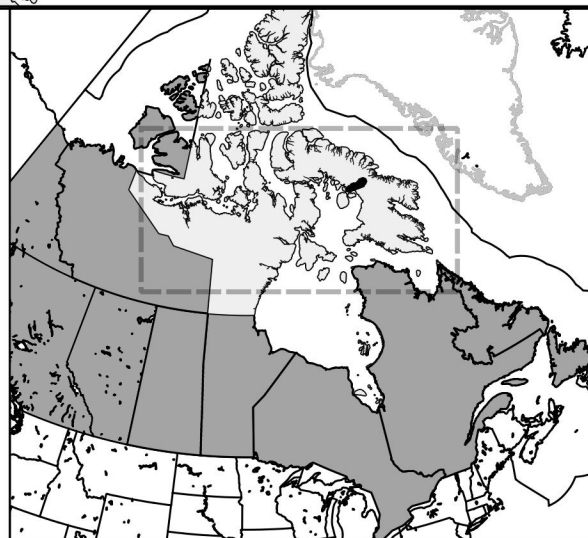


KIVALLIQ ENERGY CORP.


BAFFIN GOLD PROPERTY Figure 1: Property Location

Nunavut Territory

April 2017 UTM NAD83 Zone 18 1:10,000,000


0 Kilometres 800



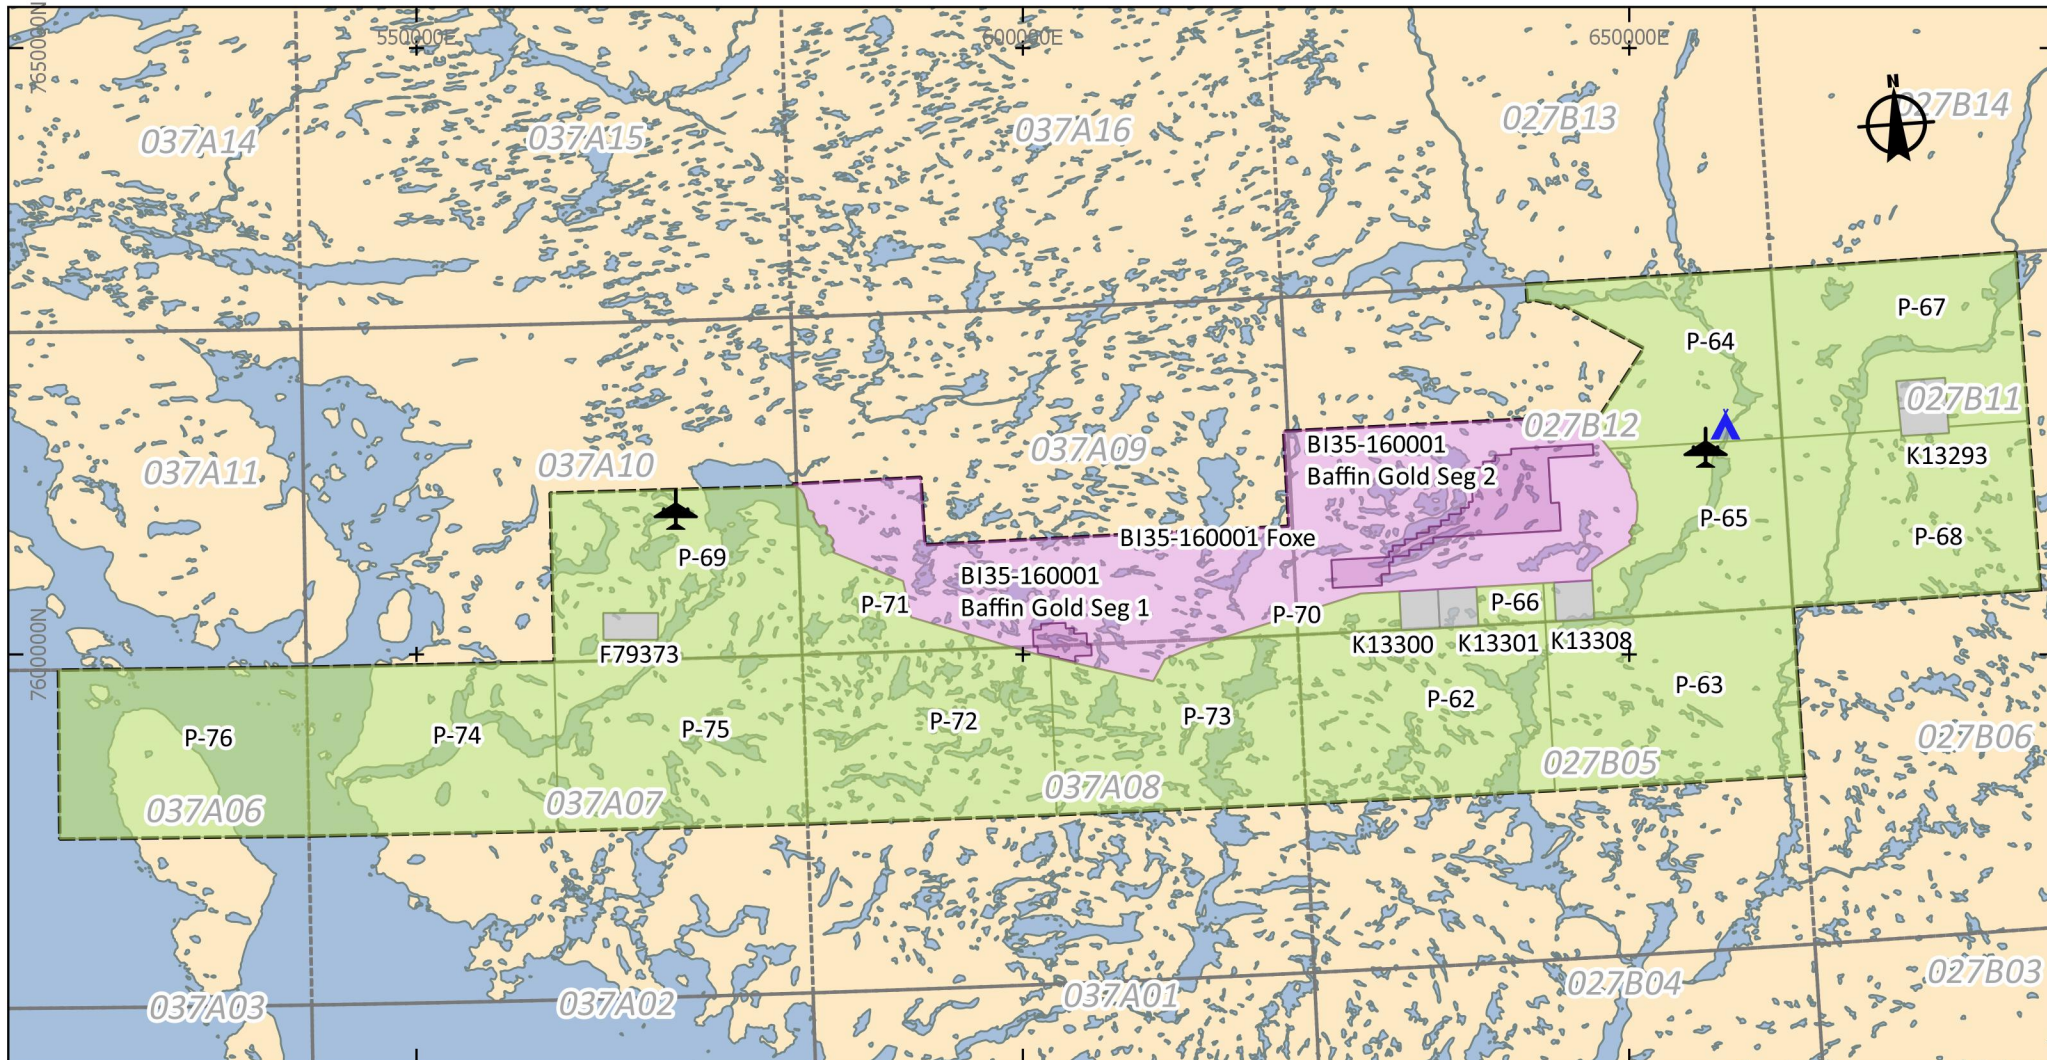

Legend

- Baffin Gold Property
- Kivalliq Mineral Claims (CMD Option)
- Kivalliq IOL BI-35 MEA
- Kivalliq IOL BI-35 MEA (CMD Option)
- Kivalliq Prospecting Permits
- Airstrip
- ▲ Dewar Lakes Camp

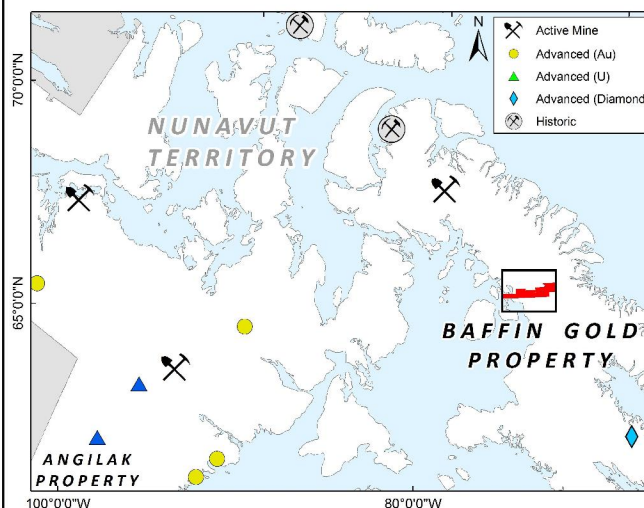

KIVALLIQ ENERGY CORP.


BAFFIN GOLD PROPERTY

Figure 2: Land Tenure

Nunavut Territory

April 2017 UTM NAD83 Zone 18 1:625,000



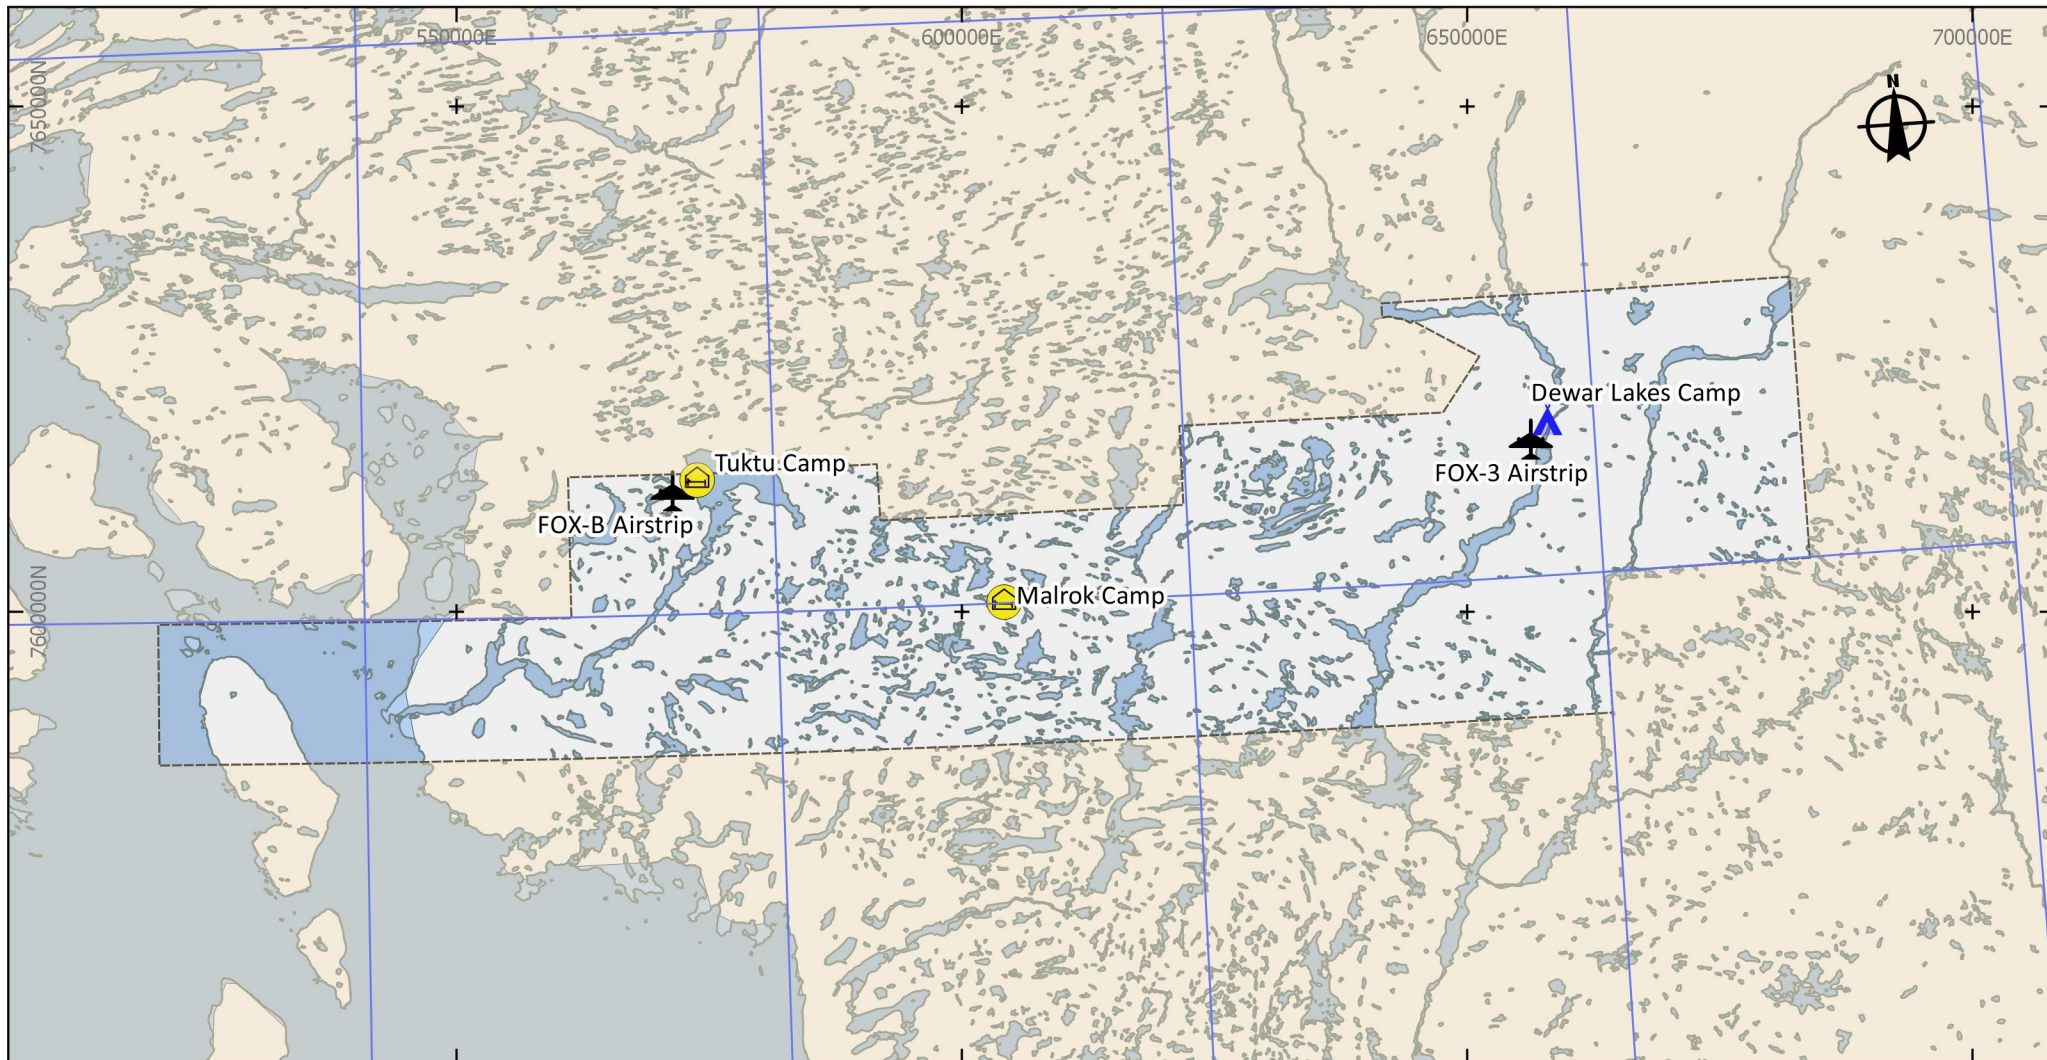


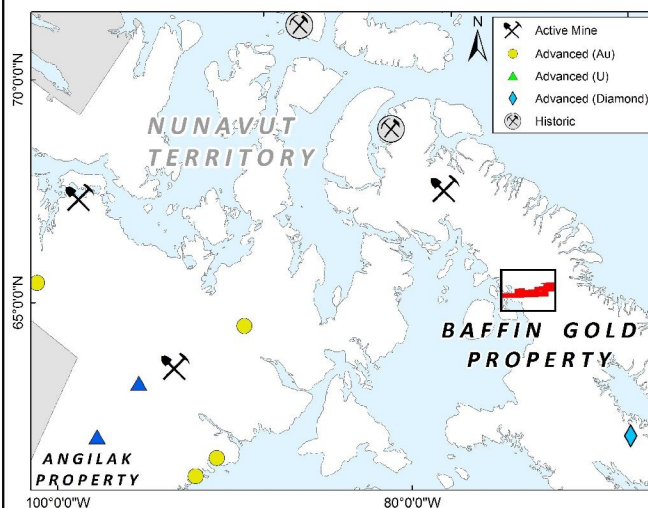


Legend

— Baffin Gold Property

Infrastructure

-  Dewar Lakes Camp (existing)
-  Fly Camp (Proposed)
-  Airstrip



KIVALLIQ ENERGY CORP.

BAFFIN GOLD PROPERTY Figure 3: Proposed Fly Camps


Nunavut Territory

April 2017 UTM NAD83 Zone 18 1:750,000

0 Kilometres 50



Existing Core Storage
(Malrok Only)



Helipad

Utility
Tent



Generator Tent

Office



Dry



Toilet Facility



Kitchen



Sleepers



First Aid



*Proposed Fly Camp layout
for Malrok site. Tuktu site
will have identical layout.*



Legend



Airstrip



Dewar Lakes Camp



Proposed Fly Camp

Fly Camp Layout



Kitchen



Dry



Office



Sleeper



Generator Tent



Utility Tent



Helicopter Pad



First Aid



Fuel Berm





Toilet Facility



Existing Core Storage



Spill Kits

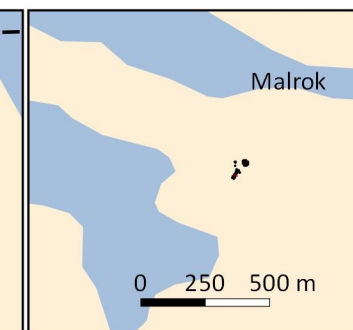

KIVALLIQ ENERGY CORP.

BAFFIN GOLD PROPERTY Figure 4: Proposed Fly Camp Layout

Nunavut Territory

May 2017 UTM NAD83 Zone 18 1 : 500

0

Metres

30



Appendix II

Nunavut Spill Report Form



Canada

NT-NU SPILL REPORT

OIL, GASOLINE, CHEMICALS AND OTHER HAZARDOUS MATERIALS

NT-NU 24-HOUR SPILL REPORT LINE

TEL: (867) 920-8130

FAX: (867) 873-6924

EMAIL: spills@gov.nt.ca

REPORT LINE USE ONLY

A	REPORT DATE: MONTH – DAY – YEAR		REPORT TIME		<input type="checkbox"/> ORIGINAL SPILL REPORT, OR <input type="checkbox"/> UPDATE # _____ TO THE ORIGINAL SPILL REPORT	REPORT NUMBER _____-_____
	B OCCURRENCE DATE: MONTH – DAY – YEAR		B OCCURRENCE TIME			
C	LAND USE PERMIT NUMBER (IF APPLICABLE)			WATER LICENCE NUMBER (IF APPLICABLE)		
D	GEOGRAPHIC PLACE NAME OR DISTANCE AND DIRECTION FROM NAMED LOCATION				REGION	
					<input type="checkbox"/> NWT <input type="checkbox"/> NUNAVUT <input type="checkbox"/> ADJACENT JURISDICTION OR OCEAN	
E	LATITUDE			LONGITUDE		
	DEGREES	MINUTES	SECONDS	DEGREES	MINUTES	SECONDS
F	RESPONSIBLE PARTY OR VESSEL NAME		RESPONSIBLE PARTY ADDRESS OR OFFICE LOCATION			
G	ANY CONTRACTOR INVOLVED		CONTRACTOR ADDRESS OR OFFICE LOCATION			
H	PRODUCT SPILLED		QUANTITY IN LITRES, KILOGRAMS OR CUBIC METRES		U.N. NUMBER	
	SECOND PRODUCT SPILLED (IF APPLICABLE)		QUANTITY IN LITRES, KILOGRAMS OR CUBIC METRES		U.N. NUMBER	
I	SPILL SOURCE		SPILL CAUSE		AREA OF CONTAMINATION IN SQUARE METRES	
J	FACTORS AFFECTING SPILL OR RECOVERY		DESCRIBE ANY ASSISTANCE REQUIRED		HAZARDS TO PERSONS, PROPERTY OR ENVIRONMENT	
K	ADDITIONAL INFORMATION, COMMENTS, ACTIONS PROPOSED OR TAKEN TO CONTAIN, RECOVER OR DISPOSE OF SPILLED PRODUCT AND CONTAMINATED MATERIALS					
L	REPORTED TO SPILL LINE BY	POSITION	EMPLOYER	LOCATION CALLING FROM	TELEPHONE	
M	ANY ALTERNATE CONTACT	POSITION	EMPLOYER	ALTERNATE CONTACT LOCATION	ALTERNATE TELEPHONE	

REPORT LINE USE ONLY

N	RECEIVED AT SPILL LINE BY	POSITION	EMPLOYER	LOCATION CALLED	REPORT LINE NUMBER
		STATION OPERATOR		YELLOWKNIFE, NT	(867) 920-8130
LEAD AGENCY <input type="checkbox"/> EC <input type="checkbox"/> CCG <input type="checkbox"/> GNWT <input type="checkbox"/> GN <input type="checkbox"/> ILA <input type="checkbox"/> INAC <input type="checkbox"/> NEB <input type="checkbox"/> TC			SIGNIFICANCE <input type="checkbox"/> MINOR <input type="checkbox"/> MAJOR <input type="checkbox"/> UNKNOWN		FILE STATUS <input type="checkbox"/> OPEN <input type="checkbox"/> CLOSED
AGENCY		CONTACT NAME	CONTACT TIME	REMARKS	
LEAD AGENCY					
FIRST SUPPORT AGENCY					
SECOND SUPPORT AGENCY					
THIRD SUPPORT AGENCY					

Appendix III

Instructions for Completing the NU Spill Report Form

Instructions for Completing the NT-NU Spill Report Form

This form can be filled out electronically and e-mailed as an attachment to spills@gov.nt.ca. Until further notice, please verify receipt of e-mail transmissions with a follow-up telephone call to the spill line. Forms can also be printed and faxed to the spill line at 867-873-6924. Spills can still be phoned in by calling collect at 867-920-8130.

A. Report Date/Time	The actual date and time that the spill was reported to the spill line. If the spill is phoned in, the Spill Line will fill this out. Please do not fill in the Report Number: the spill line will assign a number after the spill is reported.
B. Occurrence Date/Time	Indicate, to the best of your knowledge, the exact date and time that the spill occurred. Not to be confused with the report date and time (see above).
C. Land Use Permit Number /Water Licence Number	This only needs to be filled in if the activity has been licenced by the Nunavut Water Board and/or if a Land Use Permit has been issued. Applies primarily to mines and mineral exploration sites.
D. Geographic Place Name	In most cases, this will be the name of the city or town in which the spill occurred. For remote locations – outside of human habitations – identify the most prominent geographic feature, such as a lake or mountain and/or the distance and direction from the nearest population center. You must include the geographic coordinates (Refer to Section E).
E. Geographic Coordinates	This only needs to be filled out if the spill occurred outside of an established community such as a mine site. Please note that the location should be stated in degrees, minutes and seconds of Latitude and Longitude.
F. Responsible Party Or Vessel Name	This is the person who was in management/control/ownership of the substance at the time that it was spilled. In the case of a spill from a ship/vessel, include the name of the ship/vessel. Please include full address, telephone number and e-mail. Use box K if there is insufficient space. Please note that, the owner of the spilled substance is ultimately responsible for any spills of that substance, regardless of who may have actually caused the spill.
G. Contractor involved?	Were there any other parties/contractors involved? An example would be a construction company who is undertaking work on behalf of the owner of the spilled substance and who may have contributed to, or directly caused the spill and/or is responding to the spill.
H. Product Spilled	Identify the product spilled; most commonly, it is gasoline, diesel fuel or sewage. For other substances, avoid trade names. Wherever possible, use the chemical name of the substance and further, identify the product using the four digit UN number (eg: UN1203 for gasoline; UN1202 for diesel fuel; UN1863 for Jet A & B)
I. Spill Source	Identify the source of the spill: truck, ship, home heating fuel tank and, if known, the cause (eg: fuel tank overfill, leaking tank; ship ran aground; traffic accident, vandalism, storm, etc.). Provide an estimate of the extent of the contaminated/impacted area (eg: 10 m ²)
J. Factors Affecting Spill	Any factors which might make it difficult to clean up the spill: rough terrain, bad weather, remote location, lack of equipment. Do you require advice and/or assistance with the cleanup operation? Identify any hazards to persons, property or environment: for example, a gasoline spill beside a daycare centre would pose a safety hazard to children. Use box K if there is insufficient space.
K. Additional Information	Provide any additional, pertinent details about the spill, such as any peculiar/unique hazards associated with the spilled material. State what action is being taken towards cleaning up the spill; disposal of spilled material; notification of affected parties. If necessary, append additional sheets to the spill report. Number the pages in the same format found in the lower right hand corner of the spill form: eg. "Page 1 of 2", "Page 2 of 2" etc. Please number the pages to ensure that recipients can be certain that they received all pertinent documents. If only the spill report form was filled out, number the form as "Page 1 of 1".
L. Reported to Spill Line by	Include your full name, employer, contact number and the location from which you are reporting the spill. Use box K if there is insufficient space.
M. Alternate Contact	Identify any alternate contacts. This information assists regulatory agencies to obtain additional information if they cannot reach the individual who reported the spill.
N. Report Line Use Only	Leave Blank. This box is for the Spill Line's use only.

Appendix IV

MSDS Sheets

SAFETY DATA SHEET

DIESEL FUEL

000003000395



Version 2.0

Revision Date 2016/08/23

Print Date 2016/08/23

SECTION 1. IDENTIFICATION

Product name : DIESEL FUEL

Synonyms : Seasonal Diesel, #1 Diesel, #2 Heating Oil, #1 Heating Oil, D50, Arctic Diesel, Farm Diesel, Marine Diesel, Low Sulphur Diesel, LSD, Ultra Low Sulphur Diesel, ULSD, Mining Diesel, Naval Distillate, Dyed Diesel, Marked Diesel, Coloured Diesel, Furnace special, Biodiesel blend, B1, B2, B5, Diesel Low Cloud (LC), Marine Gas Oil, Marine Gas Oil Dyed.

Product code : 102762, 102763, 102755, 102302, 102744, 101801, 100678, 100677, 101802, 100107, 100668, 100658, 100911, 100663, 100652, 100460, 100065, 101796, 101793, 101795, 101792, 101794, 101791, 100768, 100643, 100642, 100103, 101798, 101800, 101797, 101788, 101789, 101787, 102531, 100734, 100733, 100640, 100997, 100995, 100732, 100731, 100994

Manufacturer or supplier's details
Petro-Canada
P.O. Box 2844, 150 - 6th Avenue South-West
Calgary Alberta T2P 3E3
Canada

Emergency telephone number
Suncor Energy: +1 403-296-3000;
Canutec Transportation: 1-888- 226-8832 (toll-free) or 613-996-6666;
Poison Control Centre: Consult local telephone directory for emergency number(s).

Recommended use of the chemical and restrictions on use

Recommended use : Diesel fuels are distillate fuels suitable for use in high and medium speed internal combustion engines of the compression ignition type. Mining diesels, marine diesels, MDO and naval distillates may have a higher flash point requirement.

Prepared by : Product Safety: +1 905-804-4752

SECTION 2. HAZARDS IDENTIFICATION

Emergency Overview

Appearance	Bright oily liquid.
Colour	Clear to yellow (This product may be dyed red for taxation purposes)
Odour	Mild petroleum oil like.
Hazard Summary	Combustible liquid. May cause cancer. Irritating to eyes and skin.

SAFETY DATA SHEET

DIESEL FUEL

000003000395



Version 2.0

Revision Date 2016/08/23

Print Date 2016/08/23

--	--

Potential Health Effects

Primary Routes of Entry	: Eye contact Ingestion Inhalation Skin contact Skin Absorption
Target Organs	: Skin Eyes Respiratory Tract
Inhalation	: May cause respiratory tract irritation. Inhalation may cause central nervous system effects. Symptoms and signs include headache, dizziness, fatigue, muscular weakness, drowsiness and in extreme cases, loss of consciousness.
Skin	: Causes skin irritation.
Eyes	: Causes eye irritation.
Ingestion	: Ingestion may cause gastrointestinal irritation, nausea, vomiting and diarrhoea. Aspiration hazard if swallowed - can enter lungs and cause damage.
Aggravated Medical Condition	: None known.

Other hazards

None known.

IARC

No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH

Confirmed animal carcinogen with unknown relevance to humans

Fuel Oil No. 1

8008-20-6

SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Substance / Mixture : Mixture

Hazardous components

Chemical name	CAS-No.	Concentration
---------------	---------	---------------

SAFETY DATA SHEET

DIESEL FUEL

000003000395



Version 2.0

Revision Date 2016/08/23

Print Date 2016/08/23

kerosine (petroleum), hydrodesulfurized	64742-81-0	70 - 100 %
kerosine (petroleum)	8008-20-6	
fuels, diesel	68334-30-5	
fuel oil no. 2	68476-30-2	
Alkanes, C10-20-branched and linear	928771-01-1	0 - 25 %
Soybean oil, Methyl ester	67784-80-9	0 - 5 %
Rape oil, Methyl ester	73891-99-3	
Fatty acids, tallow, Methyl esters	61788-61-2	

SECTION 4. FIRST AID MEASURES

- If inhaled : Move to fresh air.
Artificial respiration and/or oxygen may be necessary.
Seek medical advice.
- In case of skin contact : In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes.
Wash skin thoroughly with soap and water or use recognized skin cleanser.
Wash clothing before reuse.
Seek medical advice.
- In case of eye contact : Remove contact lenses.
Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes.
Obtain medical attention.
- If swallowed : Rinse mouth with water.
DO NOT induce vomiting unless directed to do so by a physician or poison control center.
Never give anything by mouth to an unconscious person.
Seek medical advice.
- Most important symptoms and effects, both acute and delayed : First aider needs to protect himself.

SECTION 5. FIREFIGHTING MEASURES

- Suitable extinguishing media : Dry chemical
Carbon dioxide (CO₂)
Water fog.
Foam
- Unsuitable extinguishing media : Do NOT use water jet.
- Specific hazards during fire-fighting : Cool closed containers exposed to fire with water spray.
- Hazardous combustion products : Carbon oxides (CO, CO₂), nitrogen oxides (NO_x), sulphur oxides (SO_x), sulphur compounds (H₂S), smoke and irritating

SAFETY DATA SHEET

DIESEL FUEL

000003000395



Version 2.0

Revision Date 2016/08/23

Print Date 2016/08/23

vapours as products of incomplete combustion.

- | | | |
|---|---|---|
| Further information | : | Prevent fire extinguishing water from contaminating surface water or the ground water system. |
| Special protective equipment for firefighters | : | Wear self-contained breathing apparatus for firefighting if necessary. |

SECTION 6. ACCIDENTAL RELEASE MEASURES

- | | | |
|---|---|---|
| Personal precautions, protective equipment and emergency procedures | : | Use personal protective equipment.
Ensure adequate ventilation.
Evacuate personnel to safe areas.
Material can create slippery conditions. |
| Environmental precautions | : | If the product contaminates rivers and lakes or drains inform respective authorities. |
| Methods and materials for containment and cleaning up | : | Prevent further leakage or spillage if safe to do so.
Remove all sources of ignition.
Soak up with inert absorbent material.
Non-sparking tools should be used.
Ensure adequate ventilation.
Contact the proper local authorities. |

SECTION 7. HANDLING AND STORAGE

- | | | |
|-----------------------------|---|--|
| Advice on safe handling | : | For personal protection see section 8.
Smoking, eating and drinking should be prohibited in the application area.
Use only with adequate ventilation.
In case of insufficient ventilation, wear suitable respiratory equipment.
Avoid spark promoters. Ground/bond container and equipment. These alone may be insufficient to remove static electricity.
Avoid contact with skin, eyes and clothing.
Do not ingest.
Keep away from heat and sources of ignition.
Keep container closed when not in use. |
| Conditions for safe storage | : | Store in original container.
Containers which are opened must be carefully resealed and kept upright to prevent leakage.
Keep in a dry, cool and well-ventilated place.
Keep in properly labelled containers.
To maintain product quality, do not store in heat or direct sunlight. |

SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Components with workplace control parameters

SAFETY DATA SHEET

DIESEL FUEL

000003000395



Version 2.0

Revision Date 2016/08/23

Print Date 2016/08/23

Components	CAS-No.	Value type (Form of exposure)	Control parameters / Permissible concentration	Basis
kerosine (petroleum), hydrodesulfurized	64742-81-0	TWA	200 mg/m ³ (As total hydrocarbon vapour)	ACGIH
		TWA	200 mg/m ³ (As total hydrocarbon vapour)	ACGIH
kerosine (petroleum)	8008-20-6	TWA	200 mg/m ³ (total hydrocarbon vapor)	CA BC OEL
		TWA	200 mg/m ³ (total hydrocarbon vapor)	CA AB OEL
		TWA	200 mg/m ³ (total hydrocarbon vapor)	ACGIH

Engineering measures : Use only in well-ventilated areas.
Ensure that eyewash station and safety shower are proximal to the work-station location.

Personal protective equipment

Respiratory protection : Use respiratory protection unless adequate local exhaust ventilation is provided or exposure assessment demonstrates that exposures are within recommended exposure guidelines. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Filter type : organic vapour cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. Use a positive-pressure, air-supplied respirator if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstances where air-purifying respirators may not provide adequate protection.

Hand protection
Material

: neoprene, nitrile, polyvinyl alcohol (PVA), Viton(R). Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns. It should be realized that eventually any material regardless of their imperviousness, will get permeated by chemicals. Therefore, protective gloves should be regularly checked for wear and tear. At the first signs of hardening and cracks, they should be changed.

Remarks

: Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary.

SAFETY DATA SHEET

DIESEL FUEL

000003000395



Version 2.0

Revision Date 2016/08/23

Print Date 2016/08/23

Eye protection	: Wear face-shield and protective suit for abnormal processing problems.
Skin and body protection	: Choose body protection in relation to its type, to the concentration and amount of dangerous substances, and to the specific work-place.
Protective measures	: Wash contaminated clothing before re-use.
Hygiene measures	: Remove and wash contaminated clothing and gloves, including the inside, before re-use. Wash face, hands and any exposed skin thoroughly after handling.

SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance	: Bright oily liquid.
Colour	: Clear to yellow (This product may be dyed red for taxation purposes)
Odour	: Mild petroleum oil like.
Odour Threshold	: No data available
pH	: No data available
Pour point	: No data available
Boiling point/boiling range	: 150 - 371 °C (302 - 700 °F)
Flash point	: > 40 °C (104 °F) Method: closed cup
Auto-Ignition Temperature	: 225 °C (437 °F)
Evaporation rate	: No data available
Flammability	: Flammable in presence of open flames, sparks and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. This product can accumulate static charge and ignite.
Upper explosion limit	: 6 %(V)
Lower explosion limit	: 0.7 %(V)
Vapour pressure	: 7.5 mmHg (20 °C / 68 °F)
Relative vapour density	: 4.5
Relative density	: 0.8 - 0.88

SAFETY DATA SHEET

DIESEL FUEL

000003000395



Version 2.0

Revision Date 2016/08/23

Print Date 2016/08/23

Solubility(ies)

Water solubility : insoluble

Partition coefficient: n-octanol/water : No data available

Viscosity

Viscosity, kinematic : 1.3 - 4.1 cSt (40 °C / 104 °F)

Explosive properties : Do not pressurise, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition. Runoff to sewer may create fire or explosion hazard.

SECTION 10. STABILITY AND REACTIVITY

Possibility of hazardous reactions : Hazardous polymerisation does not occur. Stable under normal conditions.

Conditions to avoid : Extremes of temperature and direct sunlight.

Incompatible materials : Reactive with oxidising agents and acids.

Hazardous decomposition products : May release COx, NOx, SOx, H2S, smoke and irritating vapours when heated to decomposition.

SECTION 11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure

Eye contact

Ingestion

Inhalation

Skin contact

Skin Absorption

Acute toxicity

Product:

Acute oral toxicity : Remarks: No data available

Acute inhalation toxicity : Remarks: No data available

Acute dermal toxicity : Remarks: No data available

Components:

kerosine (petroleum), hydrodesulfurized:

Acute oral toxicity : LD50 (Rat): > 5,000 mg/kg,

Acute inhalation toxicity : LC50 (Rat): > 5.2 mg/l
Exposure time: 4 hrs
Test atmosphere: dust/mist

SAFETY DATA SHEET

DIESEL FUEL

000003000395



Version 2.0

Revision Date 2016/08/23

Print Date 2016/08/23

Acute dermal toxicity : LD50 (Rabbit): > 2,000 mg/kg,

kerosine (petroleum):

Acute oral toxicity : LD50 (Rat): > 5,000 mg/kg,

Acute inhalation toxicity : LC50 (Rat): > 5 mg/l
Exposure time: 4 h
Test atmosphere: dust/mist

Acute dermal toxicity : LD50 (Rabbit): > 2,000 mg/kg,

fuels, diesel:

Acute oral toxicity : LD50 (Rat): 7,500 mg/kg,

Acute dermal toxicity : LD50 (Mouse): 24,500 mg/kg,

fuel oil no. 2:

Acute oral toxicity : LD50 (Rat): 12,000 mg/kg,

Acute inhalation toxicity : LC50 (Rat): 4.1 mg/l
Exposure time: 4 h
Test atmosphere: dust/mist

Skin corrosion/irritation

Product:

Remarks: No data available

Serious eye damage/eye irritation

Product:

Remarks: No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

No data available

Reproductive toxicity

No data available

STOT - single exposure

No data available

STOT - repeated exposure

No data available

SAFETY DATA SHEET

DIESEL FUEL

000003000395



Version 2.0

Revision Date 2016/08/23

Print Date 2016/08/23

SECTION 12. ECOLOGICAL INFORMATION

Ecotoxicity

Product:

Toxicity to fish :
Remarks: No data available

Toxicity to daphnia and other :
aquatic invertebrates Remarks: No data available

Toxicity to algae :
Remarks: No data available

Toxicity to bacteria : Remarks: No data available

Persistence and degradability

Product:

Biodegradability : Remarks: No data available

Bioaccumulative potential

No data available

Mobility in soil

No data available

Other adverse effects

No data available

SECTION 13. DISPOSAL CONSIDERATIONS

Disposal methods

Waste from residues : The product should not be allowed to enter drains, water courses or the soil.
Offer surplus and non-recyclable solutions to a licensed disposal company.
Waste must be classified and labelled prior to recycling or disposal.
Send to a licensed waste management company.
Dispose of as hazardous waste in compliance with local and national regulations.
Dispose of product residue in accordance with the instructions of the person responsible for waste disposal.

Contaminated packaging : Do not re-use empty containers.

SECTION 14. TRANSPORT INFORMATION

International Regulations

SAFETY DATA SHEET

DIESEL FUEL

000003000395



Version 2.0

Revision Date 2016/08/23

Print Date 2016/08/23

IATA-DGR

UN/ID No. : UN 1202
Proper shipping name : Diesel fuel
Class : 3
Packing group : III
Labels : Class 3 - Flammable Liquid
Packing instruction (cargo aircraft) : 366

IMDG-Code

UN number : UN 1202
Proper shipping name : DIESEL FUEL

Class : 3
Packing group : III
Labels : 3
EmS Code : F-E, S-E
Marine pollutant : no

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

National Regulations

TDG

UN number : UN 1202
Proper shipping name : DIESEL FUEL

Class : 3
Packing group : III
Labels : 3
ERG Code : 128
Marine pollutant : no

SECTION 15. REGULATORY INFORMATION

WHMIS Classification : B3: Combustible Liquid
D2A: Very Toxic Material Causing Other Toxic Effects
D2B: Toxic Material Causing Other Toxic Effects

This product has been classified according to the hazard criteria of the CPR and the MSDS contains all of the information required by the CPR.

The components of this product are reported in the following inventories:

DSL : On the inventory, or in compliance with the inventory
TSCA : All chemical substances in this product are either listed on the TSCA Inventory or are in compliance with a TSCA Inventory exemption.
EINECS : On the inventory, or in compliance with the inventory

SECTION 16. OTHER INFORMATION

SAFETY DATA SHEET

DIESEL FUEL

000003000395



Version 2.0

Revision Date 2016/08/23

Print Date 2016/08/23

For Copy of SDS : Internet: www.petro-canada.ca/msds
Canada-wide: telephone: 1-800-668-0220; fax: 1-800-837-1228
For Product Safety Information: 1 905-804-4752

Prepared by : Product Safety: +1 905-804-4752

Revision Date : 2016/08/23

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

**Avjet Holding Inc.**
Material Safety Data Sheet

Effective Date: 2016-01-01

Supersedes: 2013-01-01

Class B3 Combustible Class D2B Other Toxic
Liquid Effects - Skin Irritant**1. PRODUCT AND COMPANY IDENTIFICATION**

PRODUCT: **JET A-1**
SYNONYMS: Aviation Turbine Fuel (Kerosene Type)
May contain anti-icing additive (Diethylene Glycol Monomethyl Ether)
PRODUCT USE: Fuel Solvent
MSDS Number: 142-011

MANUFACTURER
Avjet Holding Inc.**TELEPHONE NUMBERS**
Avjet Emergency Number

1-866-472-0007

900, Lemire Boulevard
Drummondville, QC Canada
J2C 7W8For general information:
For MSDS information:(819) 479-1000
(819) 479-1000

This MSDS was prepared by the Toxicology and Product Stewardship Section of Avjet Holding Inc.

2. COMPOSITION/INFORMATION ON INGREDIENTS

Component Name	CAS Number	% Range	WHMIS Controlled
Kerosene (Petroleum), Hydrodesulfurized	64742-81-0	60 - 100	Yes

See Section 8 for Occupational Exposure Guidelines.

3. HAZARDS IDENTIFICATION**Physical Description:** Liquid Bright Clear Hydrocarbon Odour**Routes of Exposure:** Exposure will most likely occur through skin contact or inhalation.**Hazards:**

Combustible Liquid.
Irritating to skin.
Vapours are moderately irritating to the eyes.
Ingestion may result in vomiting. Avoid aspiration of vomitus into lungs as small quantities may result in aspiration pneumonitis.
Vapours are moderately irritating to the respiratory passages.

Handling: Eliminate all ignition sources.
Avoid prolonged exposure to vapours.
Wear suitable gloves and eye protection.
Bond and ground transfer containers and equipment to avoid static accumulation.
Empty containers are hazardous, may contain flammable / explosive dusts, liquid residue or vapours. Keep away from sparks and open flames.

For further information on health effects, see Section 11.

4. FIRST AID

Eyes: Flush eyes with water for at least 15 minutes while holding eyelids open. If irritation occurs and persists, obtain medical attention.

Skin: Wash contaminated skin with mild soap and water for 15 minutes. If irritation occurs and persists, obtain medical attention.

Ingestion: DO NOT INDUCE VOMITING! OBTAIN MEDICAL ATTENTION IMMEDIATELY.
Guard against aspiration into lungs by having the individual turn on to their left side. If vomiting occurs spontaneously keep head below hips to prevent aspiration of liquid into the lungs.

Inhalation: Remove victim from further exposure and restore breathing, if required. Obtain medical attention.

Notes to Physician: The main hazard following accidental ingestion is aspiration of the liquid into the lungs producing chemical pneumonitis. If more than 2.0 mL/kg has been ingested, vomiting should be induced with supervision. If symptoms such as loss of gag reflex, convulsions or unconsciousness occur before vomiting, gastric lavage with a cuffed endotracheal tube should be considered.

5. FIRE FIGHTING MEASURES

Extinguishing Media: Carbon Dioxide
Foam
Dry Chemical
Water Fog

Firefighting Instructions: Caution - Combustible. Vapour forms a flammable/explosive mixture with air between upper and lower flammable limits. Vapours may travel along ground and flashback along vapour trail may occur. Product will float and can be reignited on surface of water. Do not use a direct stream of water as it may spread fire. Containers exposed to intense heat from fires should be cooled with water to prevent vapour pressure buildup which could result in container rupture. Container areas exposed to direct flame contact should be cooled with large quantities of water as needed to prevent weakening of container structure. Do not enter confined fire space without adequate protective clothing and an approved positive pressure self-contained breathing apparatus.

Hazardous Combustion Products: A complex mixture of airborne solid, liquid, particulates and gases will evolve when this material undergoes pyrolysis or combustion. Carbon dioxide, carbon monoxide and unidentified organic compounds may be formed upon combustion.

6. ACCIDENTAL RELEASE MEASURES

Issue warning "Combustible". Eliminate all ignition sources. Isolate hazard area and restrict access. Handling equipment must be grounded. Try to work upwind of spill. Avoid direct contact with material. Wear appropriate breathing apparatus (if applicable) and protective clothing. Stop leak only if safe to do so. Dike and contain land spills; contain water spills by booming. Use water fog to knock down vapours; contain runoff. Absorb residue or small spills with absorbent material and remove to non-leaking containers for disposal. Recommended materials: Clay or Sand Flush area with water to remove trace residue. Dispose of recovered material as noted under Disposal Considerations. Notify appropriate environmental agency(ies).

7. HANDLING AND STORAGE

Handling: Avoid excessive heat, sparks, open flames and all other sources of ignition. Fixed equipment as well as transfer containers and equipment should be grounded to prevent accumulation of static charge. Vapours are heavier than air and will settle and collect in low areas and pits, displacing breathing air. Extinguish pilot lights, cigarettes and turn off other sources of ignition prior to use and until all vapours are gone. Vapours may accumulate and travel to distant ignition sources and flashback. Do not cut, drill, grind, weld or perform similar operations on or near containers. Empty containers are hazardous, may contain flammable/explosive dusts, residues or vapours. Do not pressurize drum containers to empty them. Wash with soap and water prior to eating, drinking, smoking, applying cosmetics or using toilet facilities. Launder contaminated clothing prior to reuse. Use good personal hygiene. Combustible.

Storage: Store in a cool, dry, well ventilated area, away from heat and ignition sources. Keep container tightly closed.

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

THE FOLLOWING INFORMATION, WHILE APPROPRIATE FOR THIS PRODUCT, IS GENERAL IN NATURE. THE SELECTION OF PERSONAL PROTECTIVE EQUIPMENT WILL VARY DEPENDING ON THE CONDITIONS OF USE.

OCCUPATIONAL EXPOSURE LIMITS (Current ACGIH TLV/TWA unless otherwise noted):

Kerosene/Jet fuels, as total hydrocarbon vapour (skin) : 200 mg/m³ (Application restricted to conditions in which there are negligible aerosol exposures.)

Skin Notation: Absorption through skin, eyes and mucous membranes may contribute significantly to the total exposure.

Mechanical Ventilation: Use explosion-proof ventilation as required to control vapour concentrations. Concentrations in air should be maintained below the recommended threshold limit value if unprotected personnel are involved. Local ventilation recommended where mechanical ventilation is ineffective in controlling airborne concentrations below the recommended occupational exposure limit. Make up air should always be supplied to balance air exhausted (either generally or locally). For personnel entry into confined spaces (i.e. bulk storage tanks) a proper confined space entry procedure must be followed including ventilation and testing of tank atmosphere.

PERSONAL PROTECTIVE EQUIPMENT:

Eye Protection: Chemical safety goggles and/or full face shield to protect eyes and face, if product is handled such that it could be splashed into eyes. Provide an eyewash station in the area.

Skin Protection: Avoid contact with skin. Use protective clothing and gloves manufactured from nitrile. Safety showers should be available for emergency use.

Respiratory Protection: Avoid breathing vapour or mists. If exposure has the potential to exceed occupational exposure limits, use an appropriate NIOSH-approved respirator. Use a NIOSH-approved chemical cartridge respirator with organic vapour cartridges or use a NIOSH-approved supplied-air respirator.

9. PHYSICAL DATA

Physical State:	Liquid
Appearance:	Bright Clear
Odour:	Hydrocarbon Odour
Odour Threshold:	Not available
Freezing/Pour Point:	Freeze Point < -47 °C
Boiling Point:	145 - 300 °C
Density:	775 - 840 kg/m ³ @ 15 °C
Vapour Density (Air = 1):	Not available
Vapour Pressure (absolute):	1 - 1.4 kPa @ 37.8 °C
pH:	Not available
Flash Point:	Tag Closed Cup > 43 °C
Lower Explosion Limit:	0.7 % (vol.)
Upper Explosion Limit:	5 % (vol.)
Autoignition Temperature:	210 °C
Viscosity:	< 8 cSt @ -20 °C
Evaporation Rate (n-BuAc = 1):	Not available
Partition Coefficient (log K_{ow}):	3.3 - 6
Water Solubility:	Insoluble
Other Solvents:	Hydrocarbon Solvents

10. STABILITY AND REACTIVITY

Chemically Stable:	Yes
Hazardous Polymerization:	No
Sensitive to Mechanical Impact:	No
Sensitive to Static Discharge:	Yes
Hazardous Decomposition Products:	Thermal decomposition products are highly dependent on combustion conditions.
Incompatible Materials:	Avoid strong oxidizing agents.

Conditions of Reactivity:

Avoid excessive heat, open flames and all ignition sources.

11. TOXICOLOGICAL INFORMATION**Ingredient (or Product if not specified) Toxicological Data**

Kerosene (Petroleum), Hydrodesulfurized LD50 Dermal Rabbit > 2000 mg/kg
LD50 Oral Rat > 5000 mg/kg

Routes of Exposure: Exposure will most likely occur through skin contact or inhalation.

Irritancy: This product is expected to be irritating to skin but is not predicted to be a skin sensitizer.

Chronic Effects: Prolonged and repeated contact with skin can cause defatting and drying of the skin resulting in skin irritation and dermatitis. Prolonged exposure to high vapour concentration can cause headache, dizziness, nausea, blurred vision and central nervous system depression.

Pre-existing Conditions: Pre-existing eye, skin and respiratory disorders may be aggravated by exposure to this product.

Carcinogenicity and Mutagenicity: The International Agency for Research on Cancer (IARC) considers that this product is not classifiable as to its carcinogenicity to humans. Middle distillates have caused skin cancers in laboratory animals when applied repeatedly and left in place between applications. This effect is believed to be caused by the continuous irritation of the skin. Good personal hygiene should be maintained to avoid this risk.

12. ECOLOGICAL INFORMATION

Do not allow product or runoff from fire control to enter storm or sanitary sewers, lakes, rivers, streams, or public waterways. Block off drains and ditches. Provincial regulations require and federal regulations may require that environmental and/or other agencies be notified of a spill incident. Spill area must be cleaned and restored to original condition or to the satisfaction of authorities. May cause physical fouling of aquatic organisms.

Biodegradability: Not readily biodegradable.
Rapid volatilization.

Bioaccumulation: Potential for bioaccumulation.

Partition Coefficient (log K_{ow}): 3.3 - 6

Aquatic Toxicity

Product is expected to be toxic to aquatic organisms.

Ingredient: Toxicological Data

Kerosene EL50 - growth rate (WAF method) Algae (72hr) 1 - 10 mg/L.
(Petroleum), EL50 (WAF method) Daphnia Magna (48hr) 1 - 10 mg/L.
Hydrodesulfurized LL50 (WAF method) Rainbow Trout (96hr) 1 - 10 mg/L.

Definition(s): LL and EL are the lethal loading concentration and effective loading concentration respectively. The concentration represents the amount of substance added to the system to obtain a toxic concentration. They replace the traditional LC and EC for low solubility substances.

WAF is the water accommodated fraction. A slightly soluble hydrocarbon is stirred into water and the insoluble portions are removed. The remaining solution is the water accommodated fraction.

13. DISPOSAL CONSIDERATIONS

Waste management priorities (depending on volumes and concentration of waste) are: 1. recycle (reprocess), 2. energy recovery (cement kilns, thermal power generation), 3. incineration, 4. disposal at a licenced waste disposal facility. Do not attempt to combust waste on-site. Incinerate at a licenced waste disposal site with approval of environmental authority.

14. TRANSPORTATION INFORMATION

Canadian Road and Rail Shipping Classification:

UN Number	UN1863
Proper Shipping Name	FUEL, AVIATION, TURBINE ENGINE
Hazard Class	Class 3 Flammable Liquids
Packing Group	PG III
Additional Information	Not Regulated in Containers Less Than or Equal to 450 Litres.
Shipping Description	FUEL, AVIATION, TURBINE ENGINE Class 3 UN1863 PG III Not Regulated in Containers Less Than or Equal to 450 Litres.

15. REGULATORY INFORMATION

This product has been classified in accordance with the hazard criteria of the *Controlled Products Regulations (CPR)* and the MSDS contains all the information required by the CPR.

WHMIS Class:	Class B3 Combustible Liquid Class D2B Other Toxic Effects - Skin Irritant
DSL/NDL Status:	This product, or all components, are listed on the Domestic Substances List, as required under the Canadian Environmental Protection Act.
Other Regulatory Status:	No Canadian federal standards.

16. ADDITIONAL INFORMATION

LABEL STATEMENTS

Hazard Statement : Combustible Liquid.
Irritating to skin.

Handling Statement: Eliminate all ignition sources.
Avoid prolonged exposure to vapours.
Wear suitable gloves and eye protection.
Bond and ground transfer containers and equipment to avoid static accumulation.
Empty containers are hazardous, may contain flammable / explosive dusts, liquid residue or vapours. Keep away from sparks and open flames.

First Aid Statement : Wash contaminated skin with soap and water.
Flush eyes with water.
If overcome by vapours remove to fresh air.
Do not induce vomiting.
Obtain medical attention.

Revisions: This MSDS has been reviewed and updated.
Changes have been made to:
Section 3
Section 4
Section 5
Section 7
Section 8
Section 9
Section 12
Section 14

**Avjet Holding Inc.**
Material Safety Data Sheet

Effective Date: 2016-01-01

Supersedes: 2013-01-01

Class B2 Flammable
LiquidClass D2B Other Toxic
Effects - Skin Irritant**1. PRODUCT AND COMPANY IDENTIFICATION**

PRODUCT: **AVGAS 100 LL**
SYNONYMS: AVIATION GASOLINE
PRODUCT USE: Fuel
MSDS Number: 101-200

MANUFACTURER
Avjet Holding Inc.**TELEPHONE NUMBERS**
Avjet Emergency Number

1-866-472-0007

900, Lemire Boulevard
Drummondville, QC Canada
J2C 7W8

For general information:
For MSDS information:

(819) 479-1000
(819) 479-1000

This MSDS was prepared by the Toxicology and Product Stewardship Section of Avjet Holding Inc.

2. COMPOSITION/INFORMATION ON INGREDIENTS

Component Name	CAS Number	% Range	WHMIS Controlled
Naphtha (Petroleum), Light Alkylate	64741-66-8	70 - 90	Yes
Toluene	108-88-3	10 - 30	Yes

See Section 8 for Occupational Exposure Guidelines.

3. HAZARDS IDENTIFICATION

Physical Description: Liquid Blue Colour Clear Typical Gasoline Odour

Routes of Exposure: Exposure will most likely occur through skin contact or inhalation.

Hazards:

Vapour concentrations above the recommended exposure level are irritating to the eyes and respiratory tract, may cause headaches and dizziness, are anesthetic and may have other central nervous system effects.

Flammable Liquid.

Irritating to skin.

Ingestion may result in vomiting. Avoid aspiration of vomitus into lungs as small quantities may result in aspiration pneumonitis.

May be absorbed by skin contact.

Handling: Eliminate all ignition sources.

Wear suitable gloves and eye protection.

Bond and ground transfer containers and equipment to avoid static accumulation.

Avoid prolonged exposure to vapours.

Empty containers are hazardous, may contain flammable / explosive dusts, liquid residue or vapours. Keep away from sparks and open flames.

For further information on health effects, see Section 11.

4. FIRST AID

Eyes: Flush eyes with water for at least 15 minutes while holding eyelids open. If irritation occurs and persists, obtain medical attention.

Skin: Wash contaminated skin with mild soap and water for 15 minutes. If irritation occurs and persists, obtain medical attention.

Ingestion: Do not induce vomiting. Guard against aspiration into lungs by having the individual turn on to their left side. If vomiting occurs spontaneously keep head below hips to prevent aspiration of liquid into the lungs. Do not give anything by mouth to an unconscious person. Obtain medical attention immediately.

Inhalation: Remove victim from further exposure and restore breathing, if required. Obtain medical attention.

Notes to Physician: The main hazard following accidental ingestion is aspiration of the liquid into the lungs producing chemical pneumonitis. If more than 2.0 mL/kg has been ingested, vomiting should be induced with supervision. If symptoms such as loss of gag reflex, convulsions or unconsciousness occur before vomiting, gastric lavage with a cuffed endotracheal tube should be considered.

5. FIRE FIGHTING MEASURES

Extinguishing Media: Dry Chemical
Carbon Dioxide
Foam
Water Fog

Firefighting Instructions: Extremely flammable. Vapour forms a flammable/explosive mixture with air between upper and lower flammable limits. Vapours may travel along ground and flashback along vapour trail may occur. Product will float and can be reignited on surface of water. Do not use water except as a fog. Avoid breathing vapours. Avoid inhalation of smoke. Do not enter confined fire space without adequate protective clothing and an approved positive pressure self-contained breathing apparatus.

Hazardous Combustion Products: Carbon dioxide, carbon monoxide and unidentified organic compounds may be formed upon combustion.

6. ACCIDENTAL RELEASE MEASURES

Issue warning "Flammable". Eliminate all ignition sources. Isolate hazard area and restrict access. Handling equipment must be grounded. Try to work upwind of spill. Avoid direct contact with material. Wear appropriate breathing apparatus (if applicable) and protective clothing. Stop leak only if safe to do so. Dike and contain land spills; contain water spills by booming. Use water fog to knock down vapours; contain runoff. Absorb residue or small spills with absorbent material and remove to non-leaking containers for disposal. Recommended materials: Clay or Sand Flush area with water to remove trace residue. Dispose of recovered material as noted under Disposal Considerations. Notify appropriate environmental agency(ies).

7. HANDLING AND STORAGE

- Handling:** Extremely flammable. Avoid breathing vapours and prolonged or repeated contact with skin. Fixed equipment as well as transfer containers and equipment should be grounded to prevent accumulation of static charge. Provide adequate ventilation. Vapours may accumulate and travel to distant ignition sources and flashback. Do not cut, drill, grind, weld or perform similar operations on or near containers. Empty containers are hazardous, may contain flammable/explosive dusts, residues or vapours. Wash with soap and water prior to eating, drinking, smoking, applying cosmetics or using toilet facilities. Launder contaminated clothing prior to reuse. Use good personal hygiene.
- Storage:** Store in a cool, dry, well ventilated area, away from heat and ignition sources. Protect against physical damage to containers.

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

THE FOLLOWING INFORMATION, WHILE APPROPRIATE FOR THIS PRODUCT, IS GENERAL IN NATURE. THE SELECTION OF PERSONAL PROTECTIVE EQUIPMENT WILL VARY DEPENDING ON THE CONDITIONS OF USE.

OCCUPATIONAL EXPOSURE LIMITS (Current ACGIH TLV/TWA unless otherwise noted):

Gasoline: 300 ppm (STEL: 500 ppm)

Toluene (skin): 50 ppm

Skin Notation: Absorption through skin, eyes and mucous membranes may contribute significantly to the total exposure.

- Mechanical Ventilation:** Use explosion-proof ventilation as required to control vapour concentrations. Concentrations in air should be maintained below lower explosive limit at all times or below the recommended threshold limit value if unprotected personnel are involved. Make up air should always be supplied to balance air exhausted (either generally or locally). For personnel entry into confined spaces (i.e. bulk storage tanks) a proper confined space entry procedure must be followed including ventilation and testing of tank atmosphere.

PERSONAL PROTECTIVE EQUIPMENT:

- Eye Protection:** Chemical safety goggles and/or full face shield to protect eyes and face, if product is handled such that it could be splashed into eyes. Provide an eyewash station in the area.

Skin Protection: Avoid contact with skin. Use protective clothing and gloves manufactured from nitrile. Safety showers should be available for emergency use.

Respiratory Protection: Avoid breathing vapour or mists. If exposure has the potential to exceed occupational exposure limits, use an appropriate NIOSH-approved respirator. For high airborne concentrations, use a NIOSH-approved supplied-air respirator, either self-contained or airline breathing apparatus, operated in positive pressure mode.

9. PHYSICAL DATA

Physical State: Liquid
Appearance: Blue Colour Clear
Odour: Typical Gasoline Odour
Odour Threshold: Not available
Freezing/Pour Point: Freeze Point < -58 °C
Boiling Point: 70 - 170 °C
Density: Not available
Vapour Density (Air = 1): Not available
Vapour Pressure (absolute): > 285 mm Hg @ 38 °C
pH: Not applicable
Flash Point: Tag Closed Cup < 1 °C
Lower Explosion Limit: 1.4 % (vol.)
Upper Explosion Limit: 7.6 % (vol.)
Autoignition Temperature: Not available
Viscosity: Not available
Evaporation Rate (n-BuAc = 1): Not available
Partition Coefficient (log K_{ow}): Not available
Water Solubility: Insoluble
Other Solvents: Hydrocarbon Solvents

10. STABILITY AND REACTIVITY

Chemically Stable: Yes
Hazardous Polymerization: No
Sensitive to Mechanical Impact: No
Sensitive to Static Discharge: Yes
Incompatible Materials: Avoid strong oxidizing agents.
Conditions of Reactivity: Avoid excessive heat, open flames and all ignition sources.

11. TOXICOLOGICAL INFORMATION

Ingredient (or Product if not specified)	Toxicological Data
Naphtha (Petroleum), Light Alkylate	LD50 Oral Rat > 8000 mg/kg LD50 Dermal Rat > 4000 mg/kg LC50 Inhalation Rat > 11000 mg/m ³ for 4hours
Toluene	LD50 Dermal Rabbit = 14000 mg/kg LC50 Inhalation Rat = 8000 ppm for 4 hours LD50 Oral Rat = 5000 mg/kg

Routes of Exposure: Exposure will most likely occur through skin contact or inhalation.
Formulation: This product contains n-hexane.

Irritancy:	This product is expected to be irritating to skin but is not predicted to be a skin sensitizer.
Acute Toxicity:	Vapour concentrations above the recommended exposure level are irritating to the eyes and respiratory tract, may cause headaches and dizziness, are anesthetic and may have other central nervous system effects.
Chronic Effects:	Prolonged and repeated contact with skin can cause defatting and drying of the skin resulting in skin irritation and dermatitis. Prolonged or repeated exposure to high vapour concentration or ingestion can cause headache, nausea, dizziness, and central nervous system depression, and in rare cases may sensitize heart muscles causing heart arrhythmia. Peripheral neurotoxicity has been reported in connection with over exposure to n-hexane. This product contains low levels of lead. Chronic, low grade exposure to lead compounds could lead to insomnia, anorexia, nausea and vomiting, diarrhea, anemia, sensory loss and muscular weakness.
Pre-existing Conditions:	Pre-existing eye, skin and respiratory disorders may be aggravated by exposure to this product.

12. ECOLOGICAL INFORMATION

Do not allow product or runoff from fire control to enter storm or sanitary sewers, lakes, rivers, streams, or public waterways. Block off drains and ditches. Provincial regulations require and federal regulations may require that environmental and/or other agencies be notified of a spill incident. Spill area must be cleaned and restored to original condition or to the satisfaction of authorities.

Biodegradability: Rapid volatilization.

Bioaccumulation: Not available.

Partition Coefficient (log K_{ow}): Not available

Aquatic Toxicity

Product is expected to be toxic to aquatic organisms.

Ingredient:	Toxicological Data
Naphtha	EL50 - growth rate (WAF method) Algae (72hr) 1 - 10 mg/L.
(Petroleum), Light	EL50 (WAF method) Daphnia Magna (48hr) 1 - 10 mg/L.
Alkylate	LL50 (WAF method) Rainbow Trout (96hr) 1 - 10 mg/L.
Toluene	EL50 - growth rate Algae (72hr) 10 - 100 mg/L.
	EL50 Daphnia Magna (48hr) 10 - 100 mg/L.
	LL50 Rainbow Trout (96hr) 10 - 100 mg/L.

13. DISPOSAL CONSIDERATIONS

Waste management priorities (depending on volumes and concentration of waste) are: 1. recycle (reprocess), 2. energy recovery (cement kilns, thermal power generation), 3. incineration, 4. disposal at a licenced waste disposal facility. Do not attempt to combust waste on-site. Incinerate at a licenced waste disposal site with approval of environmental authority.

14. TRANSPORTATION INFORMATION

Canadian Road and Rail Shipping Classification:

UN Number	UN1203
Proper Shipping Name	GASOLINE
Hazard Class	Class 3 Flammable Liquids
Packing Group	PG II
Additional Information	Marine Pollutant
Shipping Description	GASOLINE Class 3 UN1203 PG II Marine Pollutant

15. REGULATORY INFORMATION

This product has been classified in accordance with the hazard criteria of the *Controlled Products Regulations* (CPR) and the MSDS contains all the information required by the CPR.

WHMIS Class:	Class B2 Flammable Liquid Class D2B Other Toxic Effects - Skin Irritant
DSL/NDL Status:	This product, or all components, are listed on the Domestic Substances List, as required under the Canadian Environmental Protection Act.
Other Regulatory Status:	No Canadian federal standards.

16. ADDITIONAL INFORMATION**LABEL STATEMENTS**

Hazard Statement :	Flammable Liquid. Irritating to skin.
Handling Statement:	Eliminate all ignition sources. Wear suitable gloves and eye protection. Bond and ground transfer containers and equipment to avoid static accumulation. Avoid prolonged exposure to vapours. Empty containers are hazardous, may contain flammable / explosive dusts, liquid residue or vapours. Keep away from sparks and open flames.
First Aid Statement :	Wash contaminated skin with soap and water. Flush eyes with water. If overcome by vapours remove to fresh air. Do not induce vomiting. Obtain medical attention.

Revisions:

This MSDS has been reviewed and updated.
Changes have been made to:

Section 3
Section 5
Section 6
Section 7
Section 8
Section 9
Section 12
Section 14



Shell Canada Limited Material Safety Data Sheet

Effective Date: 2010-05-07

Supersedes: 2007-05-25



Class B2 Flammable Liquid



Class D2A Carcinogenicity

1. PRODUCT AND COMPANY IDENTIFICATION

PRODUCT: **REGULAR UNLEADED GASOLINE**

SYNONYMS: Automotive Fuel
Petrol

PRODUCT USE: Fuel

PRODUCT CODE: **211-001**

SUPPLIER

Shell Canada Limited (SCL)

P.O. Box 100, Station M

400-4th Ave. S.W.

Calgary, AB Canada

T2P 2H5

TELEPHONE NUMBERS

Shell Emergency Number

CANUTEC 24 HOUR EMERGENCY NUMBER

For general information:

1-800-661-7378

1-613-996-6666

1-800-661-1600

www.shell.ca

This MSDS was prepared by the Toxicology and Product Stewardship Section of Shell Canada Limited.

*An asterisk in the product name designates a trade-mark of Shell Brands International AG. Used under license.

2. COMPOSITION/INFORMATION ON INGREDIENTS

Component Name	CAS Number	% Range	WHMIS Controlled
Gasoline	86290-81-5	> 90	Yes
Benzene	71-43-2	< 1.5	Yes

See Section 8 for Occupational Exposure Guidelines.

3. HAZARDS IDENTIFICATION

Physical Description: Volatile Liquid Colourless Typical Gasoline Odour

Routes of Exposure: Exposure will most likely occur through skin contact or inhalation.

Hazards:

Vapour concentrations above the recommended exposure level are irritating to the eyes and respiratory tract, may cause headaches and dizziness, are anesthetic and may have other central nervous system effects.

Flammable Liquid.

Contains Benzene.

May cause cancer.

Ingestion may result in vomiting. Avoid aspiration of vomitus into lungs as small quantities may result in aspiration pneumonitis.
May be absorbed by skin contact.
In rare cases may sensitize heart muscle causing heart arrhythmia.
Handling: Eliminate all ignition sources.
Wear suitable gloves and eye protection.
Bond and ground transfer containers and equipment to avoid static accumulation.
Avoid prolonged exposure to vapours.
Empty containers are hazardous, may contain flammable / explosive dusts, liquid residue or vapours. Keep away from sparks and open flames.

For further information on health effects, see Section 11.

4. FIRST AID MEASURES

Eyes: Flush eyes with water for at least 15 minutes while holding eyelids open. If irritation occurs and persists, obtain medical attention.
Skin: Wash contaminated skin with mild soap and water for at least 15 minutes. If irritation occurs and persists, obtain medical attention.
Ingestion: DO NOT INDUCE VOMITING! OBTAIN MEDICAL ATTENTION IMMEDIATELY.
Guard against aspiration into lungs by having the individual turn on to their left side. If vomiting occurs spontaneously, keep head below hips to prevent aspiration of liquid into the lungs. Do not give anything by mouth to an unconscious person.
Inhalation: Remove victim from further exposure and restore breathing, if required. Obtain medical attention.
Notes to Physician: The main hazard following accidental ingestion is aspiration of the liquid into the lungs producing chemical pneumonitis.

5. FIRE FIGHTING MEASURES

Extinguishing Media: Dry Chemical
Carbon Dioxide
Foam
Water Fog
Firefighting Instructions: Flammable. Clear area of unprotected personnel. Do not use a direct stream of water as it may spread fire. Product will float and can be reignited on surface of water. Vapour forms a flammable/explosive mixture with air between upper and lower flammable limits. Avoid breathing vapours. Use water to cool fire exposed containers. Vapours may travel along ground and flashback along vapour trail may occur. Do not enter confined fire space without adequate protective clothing and an approved positive pressure self-contained breathing apparatus. Delayed lung damage can be experienced after exposure to combustion products, sometimes hours after the exposure.
Hazardous Combustion Products: Carbon dioxide, carbon monoxide and unidentified organic compounds may be formed upon combustion.

6. ACCIDENTAL RELEASE MEASURES

Issue warning "Flammable". Eliminate all ignition sources. Isolate hazard area and restrict access. Handling

equipment must be grounded. Work upwind of spill if it is safe to do so. Avoid direct contact with material. Wear appropriate breathing apparatus (if applicable) and protective clothing. Stop leak only if safe to do so. Dike and contain land spills; contain spills to water by booming. Use water fog to knock down vapours; contain runoff. Adsorb residue or small spills with adsorbent material and remove to non-leaking containers for disposal. Notify appropriate environmental agency(ies). After area has been cleaned up to the satisfaction of regulatory authorities, flush area with water to remove trace residue. Dispose of recovered material as noted under Disposal Considerations.

7. HANDLING AND STORAGE

- Handling:** Flammable. Fixed equipment as well as transfer containers and equipment should be grounded to prevent accumulation of static charge. Avoid breathing vapours and prolonged or repeated contact with skin. Vapours may accumulate and travel to distant ignition sources and flashback. Empty containers are hazardous, may contain flammable/explosive dusts, residues or vapours. Do not pressurize drum containers to empty them. Do not cut, drill, grind, weld or perform similar operations on or near containers. Provide adequate ventilation. Launder contaminated clothing prior to reuse. Wash with soap and water prior to eating, drinking, smoking, applying cosmetics or using toilet facilities.
- Storage:** Store in a cool, dry, well ventilated area, away from heat and ignition sources. Use explosion-proof ventilation to prevent vapour accumulation.

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

The following information, while appropriate for this product, is general in nature. The selection of personal protective equipment will vary depending on the conditions of use.

OCCUPATIONAL EXPOSURE LIMITS (Current ACGIH TLV/TWA unless otherwise noted):

The exposure limits listed here are provided for guidance only. Consult local, provincial and territorial authorities for specific values.

Gasoline: 300 ppm (STEL: 500 ppm)

Benzene (skin) : 0.5 ppm (STEL: 2.5 ppm)

Benzene: Shell internal standard is 0.5 ppm or 1.6 mg/m³ (8-12 hour time-weighted average limit), 2.5 ppm or 8 mg/m³ (15-minute short term limit)

Skin Notation: Absorption through skin, eyes and mucous membranes may contribute significantly to the total exposure.

- Mechanical Ventilation:** Concentrations in air should be maintained below the occupational exposure limit if unprotected personnel are involved. Use explosion-proof ventilation as required to control vapour concentrations. Local ventilation recommended where general ventilation is ineffective in controlling airborne concentrations below the recommended occupational exposure limit. Make up air should always be supplied to balance air exhausted (either generally or locally). For personnel entry into confined spaces (i.e. bulk storage tanks) a proper confined space entry procedure must be followed including ventilation and testing of tank atmosphere.

PERSONAL PROTECTIVE EQUIPMENT:

- Eye Protection:** Chemical safety goggles and/or full face shield to protect eyes and face, if product is handled such that it could be splashed into eyes. Provide an eyewash station in the area.

- Skin Protection:** Avoid contact with skin. Use protective clothing and gloves manufactured from nitrile. Safety showers should be available for emergency use.
- Respiratory Protection:** Avoid breathing vapour or mists. If exposure has the potential to exceed occupational exposure limits, use an appropriate NIOSH-approved respirator. For high airborne concentrations, use a NIOSH-approved supplied-air respirator, either self-contained or airline breathing apparatus, operated in positive pressure mode.

9. PHYSICAL AND CHEMICAL PROPERTIES

Physical State:	Volatile Liquid
Appearance:	Colourless
Odour:	Typical Gasoline Odour
Odour Threshold:	< 0.25 ppm
Freezing/Pour Point:	Not available
Boiling Point:	35 - 220 °C
Density:	720 - 760 kg/m ³ @ 15 °C
Vapour Density (Air = 1):	3.5
Vapour Pressure (absolute):	< 107 kPa @ 38 °C
Specific Gravity (Water = 1):	0.74
pH:	Not applicable
Flash Point:	TCC -30 °C
Lower Flammable Limit:	1.4 % (vol.)
Upper Flammable Limit:	7.6 % (vol.)
Autoignition Temperature:	280 °C
Viscosity:	< 1 mm ² /s @ 38 °C
Evaporation Rate (n-BuAc = 1):	Not available
Partition Coefficient (log K_{OW}):	2.3
Water Solubility:	Insoluble
Other Solvents:	Hydrocarbon Solvents
Formula:	C4 - C11

10. STABILITY AND REACTIVITY

Chemically Stable:	Yes
Hazardous Polymerization:	No
Sensitive to Mechanical Impact:	No
Sensitive to Static Discharge:	Yes
Incompatible Materials:	Avoid contact with strong oxidizing agents and acids.
Conditions of Reactivity:	Avoid excessive heat, open flames and all ignition sources.

11. TOXICOLOGICAL INFORMATION

Ingredient (or Product if not specified)	Toxicological Data
Gasoline	LD50 Oral Rat > 18 mL/kg LD50 Dermal Rabbit > 5 mL/kg
Benzene	LD50 Oral Rat 690 - 3400 mg/kg LC50 Inhalation Rat 13700 ppm for 4 hours LD50 Dermal Rabbit > 8260 mg/kg

Routes of Exposure:	Exposure will most likely occur through skin contact or inhalation.
Formulation:	No data is specifically available for this product and therefore this toxicological information is based on testing completed with the ingredients.
Irritancy:	Based on testing with similar materials, this product is not expected to be a primary skin irritant after exposure of short duration, would not be a skin sensitizer and would not be irritating to the eye.
Acute Toxicity:	Vapour concentrations above the recommended exposure level are irritating to the eyes and respiratory tract, may cause headaches and dizziness, are anesthetic and may have other central nervous system effects.
Chronic Effects:	Prolonged and repeated contact with skin can cause defatting and drying of the skin resulting in skin irritation and dermatitis. Prolonged exposure to high vapour concentration can cause headache, dizziness, nausea, blurred vision and central nervous system depression. Prolonged and repeated exposure may cause serious injury to blood forming organs, resulting in anemia and similar conditions. Myelodysplastic syndrome (MDS) has been observed in people exposed to very high levels (50 to 300 ppm) of benzene over a long period of time in the workplace. The relevance of these results to lower levels of exposure is not known.
Carcinogenicity and Mutagenicity:	According to the International Agency for Research on Cancer (IARC) this product is considered to be possibly carcinogenic to humans. This product contains benzene. Carcinogenic hazard. Repeated exposure to benzene concentrations greater than the recommended TLV/TWA may reduce the cellular components of peripheral blood and bone marrow. Epidemiological studies indicate that long term inhalation of benzene vapour can cause leukaemia in man. Benzene has also produced chromosomal aberrations in peripheral blood lymphocytes. May cause heritable genetic damage.

12. ECOLOGICAL INFORMATION

Do not allow product or runoff from fire control to enter storm or sanitary sewers, lakes, rivers, streams, or public waterways. Block off drains and ditches.

Biodegradability:	Inherently biodegradable. Rapid volatilization.
Bioaccumulation:	Potential for bioaccumulation.
Partition Coefficient (log K_{ow}):	2.3
Aquatic Toxicity:	Product is expected to be toxic to aquatic organisms.

Ingredient:	Toxicological Data
Gasoline	LL50 (WAF method) Rainbow Trout (96hr) 1 - 10 mg/L. EL50 (WAF method) Daphnia Magna (48hr) 1 - 10 mg/L. EL50 - growth rate (WAF method) Algae (72hr) 1 - 10 mg/L.
Benzene	LL50 Rainbow Trout (96hr) 1 - 10 mg/L. EL50 Daphnia Magna (48hr) 10 - 100 mg/L. EL50 - growth rate Algae (72hr) 10 - 100 mg/L.

Definition(s):	LL and EL are the lethal loading concentration and effective loading concentration respectively. The concentration represents the amount of substance added to the system to obtain a toxic concentration. They replace the traditional LC and EC for low solubility substances. WAF is the water accommodated fraction. A slightly soluble hydrocarbon is stirred
-----------------------	---

into water and the insoluble portions are removed. The remaining solution is the water accommodated fraction.

13. DISPOSAL CONSIDERATIONS

Waste management priorities (depending on volumes and concentration of waste) are: 1. recycle (reprocess), 2. energy recovery 3. incineration, 4. disposal at a licenced waste disposal facility. Do not attempt to combust waste on-site. Incinerate at a licenced waste disposal site with approval of environmental authority.

14. TRANSPORT INFORMATION

Canadian Road and Rail Shipping Classification:

UN Number	UN1203
Proper Shipping Name	GASOLINE
Hazard Class	Class 3 Flammable Liquids
Packing Group	PG II
Additional Information	Marine Pollutant
Shipping Description	GASOLINE Class 3 UN1203 PG II Marine Pollutant

15. REGULATORY INFORMATION

This product has been classified in accordance with the hazard criteria of the *Controlled Products Regulations (CPR)* and the MSDS contains all the information required by the CPR.

WHMIS Class:	Class B2 Flammable Liquid Class D2A Carcinogenicity
DSL/NDSL Status:	This product, or all components, are listed on the Domestic Substances List, as required under the Canadian Environmental Protection Act. This product and/or all components are listed on the U.S. EPA TSCA Inventory.
Other Regulatory Status:	The regulatory information is not intended to be comprehensive. Other regulations may apply to this material.

16. OTHER INFORMATION

LABEL STATEMENTS

Hazard Statement :	Flammable Liquid. Contains Benzene. May cause cancer.
Handling Statement:	Eliminate all ignition sources. Wear suitable gloves and eye protection. Bond and ground transfer containers and equipment to avoid static accumulation. Avoid prolonged exposure to vapours. Empty containers are hazardous, may contain flammable / explosive dusts, liquid residue or vapours. Keep away from sparks and open flames.
First Aid Statement :	Wash contaminated skin with soap and water. Flush eyes with water.

If overcome by vapours remove to fresh air.
Do not induce vomiting.
Obtain medical attention.

Revisions:

This MSDS has been reviewed and updated. Section 4 Section 5 Section 7 Section
8 Section 11 Section 15

SAFETY DATA SHEET

HYDREX^{TM/MC} AW 46

000003000469



Version 5.1

Revision Date 2017/02/17

Print Date 2017/02/17

SECTION 1. IDENTIFICATION

Product name : HYDREX^{TM/MC} AW 46

Product code : HDXAW46P5R, HDXAW46P20, HDXAW46ICT, HDXAW46IBC, HDXAW46DRR, HDXAW46DRM, HDXAW46DCT, HDXAW46, HDXAW46BLK

Manufacturer or supplier's details
Petro-Canada Lubricants Inc.
2310 Lakeshore Road West
Mississauga ON L5J 1K2
Canada

Emergency telephone number
Petro-Canada Lubricants Inc.: +1 905-403-5770;
CHEMTREC Transport Emergency: 1-800-424-9300;
Poison Control Centre: Consult local telephone directory for emergency number(s).

Recommended use of the chemical and restrictions on use

Recommended use : These products are designed for use as heavy duty hydraulic power transmission fluids and for lubrication where good anti-wear and anti-oxidation properties are required. They would typically be used in high-pressure hydraulic systems, machine tools, presses, compressors, pumps, gear sets, and centralized bearing lubrication systems.

Prepared by : Product Safety: +1 905-804-4752

SECTION 2. HAZARDS IDENTIFICATION

Emergency Overview

Appearance	viscous liquid
Colour	Pale, straw-yellow.
Odour	Mild petroleum oil like.

GHS Classification

Not a hazardous substance or mixture.

GHS label elements

Not a hazardous substance or mixture.

Potential Health Effects

Primary Routes of Entry : Eye contact
Ingestion
Inhalation

SAFETY DATA SHEET

HYDREX^{TM/MC} AW 46

000003000469



Version 5.1

Revision Date 2017/02/17

Print Date 2017/02/17

Skin contact

Aggravated Medical Condition : None known.

Other hazards

None known.

IARC

No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH

No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Substance / Mixture : Mixture

Hazardous components

Chemical name	CAS-No.	Concentration
lubricating oils (petroleum), C20-50, hydrotreated neutral oil-based	72623-87-1	70 - 90 %
lubricating oils (petroleum), C20-50, hydrotreated neutral oil-based, high viscosity	72623-85-9	10 - 20 %
distillates (petroleum), hydrotreated heavy paraffinic	64742-54-7	10 - 20 %
lubricating oils (petroleum), C15-30, hydrotreated neutral oil-based	72623-86-0	10 - 20 %

SECTION 4. FIRST AID MEASURES

If inhaled : Move to fresh air.
Artificial respiration and/or oxygen may be necessary.
Seek medical advice.

In case of skin contact : In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes.
Wash skin thoroughly with soap and water or use recognized skin cleanser.
Wash clothing before reuse.
Seek medical advice.

In case of eye contact : Remove contact lenses.
Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes.
Obtain medical attention.

SAFETY DATA SHEET

HYDREX^{TM/MC} AW 46

000003000469



Version 5.1

Revision Date 2017/02/17

Print Date 2017/02/17

- | | |
|---|---|
| If swallowed | : Rinse mouth with water.
DO NOT induce vomiting unless directed to do so by a physician or poison control center.
Never give anything by mouth to an unconscious person.
Seek medical advice. |
| Most important symptoms and effects, both acute and delayed | : First aider needs to protect himself. |

SECTION 5. FIREFIGHTING MEASURES

- | | |
|---------------------------------------|---|
| Suitable extinguishing media | : Use extinguishing measures that are appropriate to local circumstances and the surrounding environment. |
| Unsuitable extinguishing media | : No information available. |
| Specific hazards during fire-fighting | : Cool closed containers exposed to fire with water spray. |
| Hazardous combustion products | : Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), smoke and irritating vapours as products of incomplete combustion. |
| Further information | : Prevent fire extinguishing water from contaminating surface water or the ground water system. |

SECTION 6. ACCIDENTAL RELEASE MEASURES

- | | |
|---|---|
| Personal precautions, protective equipment and emergency procedures | : Use personal protective equipment.
Ensure adequate ventilation.
Evacuate personnel to safe areas.
Material can create slippery conditions. |
| Environmental precautions | : Do not allow uncontrolled discharge of product into the environment. |
| Methods and materials for containment and cleaning up | : Prevent further leakage or spillage if safe to do so.
Remove all sources of ignition.
Soak up with inert absorbent material.
Non-sparking tools should be used.
Ensure adequate ventilation.
Contact the proper local authorities. |

SECTION 7. HANDLING AND STORAGE

- | | |
|-------------------------|--|
| Advice on safe handling | : For personal protection see section 8.
Smoking, eating and drinking should be prohibited in the ap- |
|-------------------------|--|

SAFETY DATA SHEET

HYDREX^{TM/MC} AW 46

000003000469



Version 5.1

Revision Date 2017/02/17

Print Date 2017/02/17

plication area.
Use only with adequate ventilation.
In case of insufficient ventilation, wear suitable respiratory equipment.
Avoid contact with skin, eyes and clothing.
Do not ingest.
Keep away from heat and sources of ignition.
Keep container closed when not in use.

Conditions for safe storage : Store in original container.
Containers which are opened must be carefully resealed and kept upright to prevent leakage.
Keep in a dry, cool and well-ventilated place.
Keep in properly labelled containers.
To maintain product quality, do not store in heat or direct sunlight.

SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Components with workplace control parameters

Components	CAS-No.	Value type (Form of exposure)	Control parameters / Permissible concentration	Basis
lubricating oils (petroleum), C20-50, hydrotreated neutral oil-based	72623-87-1	TWA (Mist)	5 mg/m3	CA AB OEL
		STEL (Mist)	10 mg/m3	CA AB OEL
		TWAEV (Mist)	5 mg/m3	CA QC OEL
		STEV (Mist)	10 mg/m3	CA QC OEL
		TWA (Inhalable fraction)	5 mg/m3	ACGIH
lubricating oils (petroleum), C20-50, hydrotreated neutral oil-based, high viscosity	72623-85-9	TWA (Mist)	5 mg/m3	CA AB OEL
		STEL (Mist)	10 mg/m3	CA AB OEL
		TWAEV (Mist)	5 mg/m3	CA QC OEL
		STEV (Mist)	10 mg/m3	CA QC OEL
		TWA (Inhalable fraction)	5 mg/m3	ACGIH
lubricating oils (petroleum), C15-30, hydrotreated neutral oil-based	72623-86-0	TWA (Mist)	5 mg/m3	CA AB OEL
		STEL (Mist)	10 mg/m3	CA AB OEL
		TWAEV (Mist)	5 mg/m3	CA QC OEL
		STEV (Mist)	10 mg/m3	CA QC OEL
		TWA (Inhalable fraction)	5 mg/m3	ACGIH

Engineering measures : No special ventilation requirements. Good general ventilation should be sufficient to control worker exposure to airborne

SAFETY DATA SHEET

HYDREX^{TM/MC} AW 46

000003000469



Version 5.1

Revision Date 2017/02/17

Print Date 2017/02/17

contaminants.

Personal protective equipment

Respiratory protection : Use respiratory protection unless adequate local exhaust ventilation is provided or exposure assessment demonstrates that exposures are within recommended exposure guidelines. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Filter type : organic vapour filter

Hand protection
Material : neoprene, nitrile, polyvinyl alcohol (PVA), Viton(R).

Remarks : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary.

Eye protection : Wear face-shield and protective suit for abnormal processing problems.

Skin and body protection : Choose body protection in relation to its type, to the concentration and amount of dangerous substances, and to the specific work-place.

Protective measures : Wash contaminated clothing before re-use.

Hygiene measures : Remove and wash contaminated clothing and gloves, including the inside, before re-use.
Wash face, hands and any exposed skin thoroughly after handling.

SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance : viscous liquid

Colour : Pale, straw-yellow.

Odour : Mild petroleum oil like.

Odour Threshold : No data available

pH : No data available

Pour point : -39 °C (-38 °F)

Boiling point/boiling range : No data available

Flash point : 236 °C (457 °F)
Method: Cleveland open cup

SAFETY DATA SHEET

HYDREX^{TM/MC} AW 46

000003000469



Version 5.1

Revision Date 2017/02/17

Print Date 2017/02/17

Fire Point	: No data available
Auto-Ignition Temperature	: No data available
Evaporation rate	: No data available
Flammability	: Low fire hazard. This material must be heated before ignition will occur.
Upper explosion limit	: No data available
Lower explosion limit	: No data available
Vapour pressure	: No data available
Relative vapour density	: No data available
Density	: 0.8660 kg/l (15 °C / 59 °F)
Solubility(ies)	
Water solubility	: insoluble
Partition coefficient: n-octanol/water	: No data available
Viscosity	
Viscosity, kinematic	: 46.4 cSt (40 °C / 104 °F) 6.92 cSt (100 °C / 212 °F)
Explosive properties	: Do not pressurise, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition.

SECTION 10. STABILITY AND REACTIVITY

Possibility of hazardous reactions	: Hazardous polymerisation does not occur. Stable under normal conditions.
Conditions to avoid	: No data available
Incompatible materials	: Reactive with oxidising agents and reducing agents.
Hazardous decomposition products	: May release CO _x , H ₂ S, metal oxides, methacrylate monomers, smoke and irritating vapours when heated to decomposition.

SECTION 11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure

Eye contact
Ingestion

SAFETY DATA SHEET

HYDREX^{TM/MC} AW 46

000003000469



Version 5.1

Revision Date 2017/02/17

Print Date 2017/02/17

Inhalation
Skin contact

Acute toxicity

Product:

Acute oral toxicity : Remarks: No data available

Acute inhalation toxicity : Remarks: No data available

Acute dermal toxicity : Assessment: The substance or mixture has no acute dermal toxicity
Remarks: No data available

Components:

lubricating oils (petroleum), C20-50, hydrotreated neutral oil-based:

Acute oral toxicity : LD50 (Rat): > 5,000 mg/kg,

Acute inhalation toxicity : LC50 (Rat): > 5.2 mg/l
Exposure time: 4 h
Test atmosphere: dust/mist

Acute dermal toxicity : LD50 (Rabbit): > 2,000 mg/kg,

lubricating oils (petroleum), C20-50, hydrotreated neutral oil-based, high viscosity:

Acute oral toxicity : LD50 (Rat): > 5,000 mg/kg,

Acute inhalation toxicity : LC50 (Rat): > 5.2 mg/l
Exposure time: 4 h
Test atmosphere: dust/mist

Acute dermal toxicity : LD50 (Rabbit): > 2,000 mg/kg,

lubricating oils (petroleum), C15-30, hydrotreated neutral oil-based:

Acute oral toxicity : LD50 (Rat): > 5,000 mg/kg,

Acute inhalation toxicity : LC50 (Rat): > 5.2 mg/l
Exposure time: 4 h
Test atmosphere: dust/mist

Acute dermal toxicity : LD50 (Rabbit): > 2,000 mg/kg,

Skin corrosion/irritation

Product:

Remarks: No data available

Serious eye damage/eye irritation

Product:

Remarks: No data available

SAFETY DATA SHEET

HYDREX^{TM/MC} AW 46

000003000469



Version 5.1

Revision Date 2017/02/17

Print Date 2017/02/17

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

No data available

Reproductive toxicity

No data available

STOT - single exposure

No data available

STOT - repeated exposure

No data available

SECTION 12. ECOLOGICAL INFORMATION

Ecotoxicity

Product:

Toxicity to fish : Remarks: No data available

Toxicity to daphnia and other aquatic invertebrates : Remarks: No data available

Toxicity to algae : Remarks: No data available

Toxicity to bacteria : Remarks: No data available

Persistence and degradability

Product:

Biodegradability : Remarks: No data available

Bioaccumulative potential

No data available

Mobility in soil

No data available

Other adverse effects

No data available

SAFETY DATA SHEET

HYDREX^{TM/MC} AW 46

000003000469



Version 5.1

Revision Date 2017/02/17

Print Date 2017/02/17

SECTION 13. DISPOSAL CONSIDERATIONS

Disposal methods

Waste from residues : The product should not be allowed to enter drains, water courses or the soil.
Offer surplus and non-recyclable solutions to a licensed disposal company.
Waste must be classified and labelled prior to recycling or disposal.
Send to a licensed waste management company.
Dispose of product residue in accordance with the instructions of the person responsible for waste disposal.

SECTION 14. TRANSPORT INFORMATION

International Regulations

IATA-DGR

Not regulated as a dangerous good

IMDG-Code

Not regulated as a dangerous good

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

Not applicable for product as supplied.

National Regulations

TDG

Not regulated as a dangerous good

SECTION 15. REGULATORY INFORMATION

This product has been classified according to the hazard criteria of the CPR and the MSDS contains all of the information required by the CPR.

The components of this product are reported in the following inventories:

DSL

On the inventory, or in compliance with the inventory

TSCA

All chemical substances in this product are either listed on the TSCA Inventory or are in compliance with a TSCA Inventory exemption.

EINECS

On the inventory, or in compliance with the inventory

IECSC

One or more components has been notified but may not be listed in the inventory.

SECTION 16. OTHER INFORMATION

For Copy of SDS

: Internet: lubricants.petro-canada.com/sds
Western Canada, telephone: 1-800-661-1199; fax: 1-800-378-

SAFETY DATA SHEET

HYDREX^{TM/MC} AW 46

000003000469



Version 5.1

Revision Date 2017/02/17

Print Date 2017/02/17

4518

Ontario & Central Canada, telephone: 1-800-268-5850; fax: 1-800-201-6285

Quebec & Eastern Canada, telephone: 1-800-576-1686; fax: 1-800-201-6285

For Product Safety Information: 1 905-804-4752

Prepared by : Product Safety: +1 905-804-4752

Revision Date : 2017/02/17

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

Material Safety Data Sheet



SECTION 1 PRODUCT AND COMPANY IDENTIFICATION

Chevron Hydraulic Oil AW

Product Use: Hydraulic Oil

Product Number(s): CPS255673, CPS255674, CPS255675

Synonyms: Chevron Hydraulic Oil AW ISO 32, Chevron Hydraulic Oil AW ISO 46, Chevron Hydraulic Oil AW ISO 68

Company Identification

Chevron Products Company
a division of Chevron U.S.A. Inc.
6001 Bollinger Canyon Rd.
San Ramon, CA 94583
United States of America
www.chevronlubricants.com

Transportation Emergency Response

CHEMTREC: (800) 424-9300 or (703) 527-3887

Health Emergency

Chevron Emergency Information Center: Located in the USA. International collect calls accepted. (800) 231-0623 or (510) 231-0623

Product Information

email : lubemsds@chevron.com
Product Information: (800) LUBE TEK

SECTION 2 COMPOSITION/ INFORMATION ON INGREDIENTS

COMPONENTS	CAS NUMBER	AMOUNT
Highly refined mineral oil (C15 - C50)	Mixture	70 - 100 %wt/wt

SECTION 3 HAZARDS IDENTIFICATION

IMMEDIATE HEALTH EFFECTS

Eye: Not expected to cause prolonged or significant eye irritation.

Skin: Contact with the skin is not expected to cause prolonged or significant irritation. Contact with the skin is not expected to cause an allergic skin response. Not expected to be harmful to internal organs if absorbed through the skin. High-Pressure Equipment Information: Accidental high-velocity injection under the skin of materials of this type may result in serious injury. Seek medical attention at once should an accident like this occur. The initial wound at the injection site may not appear to be serious at first; but, if left untreated, could result in disfigurement or amputation of the affected part.

Ingestion: Not expected to be harmful if swallowed.

Inhalation: Not expected to be harmful if inhaled. Contains a petroleum-based mineral oil. May cause respiratory irritation or other pulmonary effects following prolonged or repeated inhalation of oil mist at airborne levels above the recommended mineral oil mist exposure limit. Symptoms of respiratory irritation may include coughing and difficulty breathing.

SECTION 4 FIRST AID MEASURES

Eye: No specific first aid measures are required. As a precaution, remove contact lenses, if worn, and flush eyes with water.

Skin: No specific first aid measures are required. As a precaution, remove clothing and shoes if contaminated. To remove the material from skin, use soap and water. Discard contaminated clothing and shoes or thoroughly clean before reuse.

Ingestion: No specific first aid measures are required. Do not induce vomiting. As a precaution, get medical advice.

Inhalation: No specific first aid measures are required. If exposed to excessive levels of material in the air, move the exposed person to fresh air. Get medical attention if coughing or respiratory discomfort occurs.

Note to Physicians: In an accident involving high-pressure equipment, this product may be injected under the skin. Such an accident may result in a small, sometimes bloodless, puncture wound. However, because of its driving force, material injected into a fingertip can be deposited into the palm of the hand. Within 24 hours, there is usually a great deal of swelling, discoloration, and intense throbbing pain. Immediate treatment at a surgical emergency center is recommended.

SECTION 5 FIRE FIGHTING MEASURES

Leaks/ruptures in high pressure system using materials of this type can create a fire hazard when in the vicinity of ignition sources (eg. open flame, pilot lights, sparks, or electric arcs).

FIRE CLASSIFICATION:

OSHA Classification (29 CFR 1910.1200): Not classified by OSHA as flammable or combustible.

NFPA RATINGS: Health: 0 Flammability: 1 Reactivity: 0

FLAMMABLE PROPERTIES:

Flashpoint: (Cleveland Open Cup) 170 °C (338 °F) Minimum

Autoignition: No data available

Flammability (Explosive) Limits (% by volume in air): Lower: Not Applicable Upper: Not Applicable

EXTINGUISHING MEDIA: Use water fog, foam, dry chemical or carbon dioxide (CO₂) to extinguish flames.

PROTECTION OF FIRE FIGHTERS:

Fire Fighting Instructions: This material will burn although it is not easily ignited. For fires involving this material, do not enter any enclosed or confined fire space without proper protective equipment, including self-contained breathing apparatus.

Combustion Products: Highly dependent on combustion conditions. A complex mixture of airborne solids, liquids, and gases including carbon monoxide, carbon dioxide, and unidentified organic compounds will be evolved when this material undergoes combustion.

SECTION 6 ACCIDENTAL RELEASE MEASURES

Protective Measures: Eliminate all sources of ignition in vicinity of spilled material.

Spill Management: Stop the source of the release if you can do it without risk. Contain release to prevent further contamination of soil, surface water or groundwater. Clean up spill as soon as possible, observing precautions in Exposure Controls/Personal Protection. Use appropriate techniques such as applying non-combustible absorbent materials or pumping. Where feasible and appropriate, remove contaminated soil. Place contaminated materials in disposable containers and dispose of in a manner consistent with applicable regulations.

Reporting: Report spills to local authorities and/or the U.S. Coast Guard's National Response Center at (800) 424-8802 as appropriate or required.

SECTION 7 HANDLING AND STORAGE

Precautionary Measures: DO NOT USE IN HIGH PRESSURE SYSTEMS in the vicinity of flames, sparks and hot surfaces. Use only in well ventilated areas. Keep container closed.

General Handling Information: Avoid contaminating soil or releasing this material into sewage and drainage systems and bodies of water.

Static Hazard: Electrostatic charge may accumulate and create a hazardous condition when handling this material. To minimize this hazard, bonding and grounding may be necessary but may not, by themselves, be sufficient. Review all operations which have the potential of generating and accumulating an electrostatic charge and/or a flammable atmosphere (including tank and container filling, splash filling, tank cleaning, sampling, gauging, switch loading, filtering, mixing, agitation, and vacuum truck operations) and use appropriate mitigating procedures. For more information, refer to OSHA Standard 29 CFR 1910.106, 'Flammable and Combustible Liquids', National Fire Protection Association (NFPA 77, 'Recommended Practice on Static Electricity', and/or the American Petroleum Institute (API) Recommended Practice 2003, 'Protection Against Ignitions Arising Out of Static, Lightning, and Stray Currents'.

Container Warnings: Container is not designed to contain pressure. Do not use pressure to empty container or it may rupture with explosive force. Empty containers retain product residue (solid, liquid, and/or vapor) and can be dangerous. Do not pressurize, cut, weld, braze, solder, drill, grind, or expose such containers to heat, flame, sparks, static electricity, or other sources of ignition. They may explode and cause injury or death. Empty containers should be completely drained, properly closed, and promptly returned to a drum reconditioner or disposed of properly.

SECTION 8 EXPOSURE CONTROLS/PERSONAL PROTECTION

GENERAL CONSIDERATIONS:

Consider the potential hazards of this material (see Section 3), applicable exposure limits, job activities, and other substances in the work place when designing engineering controls and selecting personal protective equipment. If engineering controls or work practices are not adequate to prevent exposure to harmful levels of this material, the personal protective equipment listed below is recommended. The user should read and understand all instructions and limitations supplied with the equipment since protection is usually provided for a limited time or under certain circumstances.

ENGINEERING CONTROLS:

Use in a well-ventilated area.

PERSONAL PROTECTIVE EQUIPMENT

Eye/Face Protection: No special eye protection is normally required. Where splashing is possible, wear safety glasses with side shields as a good safety practice.

Skin Protection: No special protective clothing is normally required. Where splashing is possible, select protective clothing depending on operations conducted, physical requirements and other substances in the

workplace. Suggested materials for protective gloves include: 4H (PE/EVAL), Nitrile Rubber, Silver Shield, Viton.

Respiratory Protection: No respiratory protection is normally required.

If user operations generate an oil mist, determine if airborne concentrations are below the occupational exposure limit for mineral oil mist. If not, wear an approved respirator that provides adequate protection from the measured concentrations of this material. For air-purifying respirators use a particulate cartridge. Use a positive pressure air-supplying respirator in circumstances where air-purifying respirators may not provide adequate protection.

Occupational Exposure Limits:

Component	Agency	TWA	STEL	Ceiling	Notation
Highly refined mineral oil (C15 - C50)	ACGIH	5 mg/m ³	10 mg/m ³	--	--
Highly refined mineral oil (C15 - C50)	OSHA Z-1	5 mg/m ³	--	--	--

Consult local authorities for appropriate values.

SECTION 9 PHYSICAL AND CHEMICAL PROPERTIES

Attention: the data below are typical values and do not constitute a specification.

Color: Yellow

Physical State: Liquid

Odor: Petroleum odor

pH: Not Applicable

Vapor Pressure: <0.01 mmHg @ 37.8 °C (100 °F)

Vapor Density (Air = 1): >1

Boiling Point: >315°C (599°F)

Solubility: Soluble in hydrocarbon solvents; insoluble in water.

Freezing Point: Not Applicable

Density: 0.87 kg/l @ 15°C (59°F) (Typical)

Viscosity: 28.8 mm²/s @ 40°C (104°F) Minimum

SECTION 10 STABILITY AND REACTIVITY

Chemical Stability: This material is considered stable under normal ambient and anticipated storage and handling conditions of temperature and pressure.

Incompatibility With Other Materials: May react with strong acids or strong oxidizing agents, such as chlorates, nitrates, peroxides, etc.

Hazardous Decomposition Products: None known (None expected)

Hazardous Polymerization: Hazardous polymerization will not occur.

SECTION 11 TOXICOLOGICAL INFORMATION

IMMEDIATE HEALTH EFFECTS

Eye Irritation: The eye irritation hazard is based on evaluation of data for similar materials or product components.

Skin Irritation: The skin irritation hazard is based on evaluation of data for similar materials or product components.

Skin Sensitization: The skin sensitization hazard is based on evaluation of data for similar materials or product components.

Acute Dermal Toxicity: The acute dermal toxicity hazard is based on evaluation of data for similar

materials or product components.

Acute Oral Toxicity: The acute oral toxicity hazard is based on evaluation of data for similar materials or product components.

Acute Inhalation Toxicity: The acute inhalation toxicity hazard is based on evaluation of data for similar materials or product components.

ADDITIONAL TOXICOLOGY INFORMATION:

This product contains petroleum base oils which may be refined by various processes including severe solvent extraction, severe hydrocracking, or severe hydrotreating. None of the oils requires a cancer warning under the OSHA Hazard Communication Standard (29 CFR 1910.1200). These oils have not been listed in the National Toxicology Program (NTP) Annual Report nor have they been classified by the International Agency for Research on Cancer (IARC) as; carcinogenic to humans (Group 1), probably carcinogenic to humans (Group 2A), or possibly carcinogenic to humans (Group 2B). These oils have not been classified by the American Conference of Governmental Industrial Hygienists (ACGIH) as: confirmed human carcinogen (A1), suspected human carcinogen (A2), or confirmed animal carcinogen with unknown relevance to humans (A3).

SECTION 12 ECOLOGICAL INFORMATION

ECOTOXICITY

This material is not expected to be harmful to aquatic organisms. The ecotoxicity hazard is based on an evaluation of data for the components or a similar material.

ENVIRONMENTAL FATE

Ready Biodegradability: This material is not expected to be readily biodegradable. The biodegradability of this material is based on an evaluation of data for the components or a similar material.

SECTION 13 DISPOSAL CONSIDERATIONS

Use material for its intended purpose or recycle if possible. Oil collection services are available for used oil recycling or disposal. Place contaminated materials in containers and dispose of in a manner consistent with applicable regulations. Contact your sales representative or local environmental or health authorities for approved disposal or recycling methods.

SECTION 14 TRANSPORT INFORMATION

The description shown may not apply to all shipping situations. Consult 49CFR, or appropriate Dangerous Goods Regulations, for additional description requirements (e.g., technical name) and mode-specific or quantity-specific shipping requirements.

DOT Shipping Description: PETROLEUM LUBRICATING OIL, NOT REGULATED AS A HAZARDOUS MATERIAL FOR TRANSPORTATION UNDER 49 CFR

IMO/IMDG Shipping Description: PETROLEUM LUBRICATING OIL; NOT REGULATED AS DANGEROUS GOODS FOR TRANSPORT UNDER THE IMDG CODE

ICAO/IATA Shipping Description: PETROLEUM LUBRICATING OIL; NOT REGULATED AS DANGEROUS GOODS FOR TRANSPORT UNDER ICAO TI OR IATA DGR

SECTION 15 REGULATORY INFORMATION

EPCRA 311/312 CATEGORIES:	1. Immediate (Acute) Health Effects:	NO
	2. Delayed (Chronic) Health Effects:	NO
	3. Fire Hazard:	NO
	4. Sudden Release of Pressure Hazard:	NO
	5. Reactivity Hazard:	NO

REGULATORY LISTS SEARCHED:

01-1=IARC Group 1	03=EPCRA 313
01-2A=IARC Group 2A	04=CA Proposition 65
01-2B=IARC Group 2B	05=MA RTK
02=NTP Carcinogen	06=NJ RTK
	07=PA RTK

No components of this material were found on the regulatory lists above.

CHEMICAL INVENTORIES:

All components comply with the following chemical inventory requirements: AICS (Australia), DSL (Canada), EINECS (European Union), ENCS (Japan), IECSC (China), KECI (Korea), PICCS (Philippines), TSCA (United States).

NEW JERSEY RTK CLASSIFICATION:

Under the New Jersey Right-to-Know Act L. 1983 Chapter 315 N.J.S.A. 34:5A-1 et. seq., the product is to be identified as follows: PETROLEUM OIL (Hydraulic oil)

WHMIS CLASSIFICATION:

This product is not considered a controlled product according to the criteria of the Canadian Controlled Products Regulations.

SECTION 16 OTHER INFORMATION

NFPA RATINGS: Health: 0 Flammability: 1 Reactivity: 0

HMIS RATINGS: Health: 1 Flammability: 1 Reactivity: 0
(0-Least, 1-Slight, 2-Moderate, 3-High, 4-Extreme, PPE:- Personal Protection Equipment Index recommendation, *- Chronic Effect Indicator). These values are obtained using the guidelines or published evaluations prepared by the National Fire Protection Association (NFPA) or the National Paint and Coating Association (for HMIS ratings).

LABEL RECOMMENDATION:

Label Category : INDUSTRIAL OIL 1 - IND1

REVISION STATEMENT: This revision updates the following sections of this Material Safety Data Sheet:
1,2,9,16

Revision Date: FEBRUARY 16, 2012

ABBREVIATIONS THAT MAY HAVE BEEN USED IN THIS DOCUMENT:

TLV - Threshold Limit Value	TWA - Time Weighted Average
STEL - Short-term Exposure Limit	PEL - Permissible Exposure Limit

	CAS - Chemical Abstract Service Number
ACGIH - American Conference of Governmental Industrial Hygienists	IMO/IMDG - International Maritime Dangerous Goods Code
API - American Petroleum Institute	MSDS - Material Safety Data Sheet
CVX - Chevron	NFPA - National Fire Protection Association (USA)
DOT - Department of Transportation (USA)	NTP - National Toxicology Program (USA)
IARC - International Agency for Research on Cancer	OSHA - Occupational Safety and Health Administration

Prepared according to the OSHA Hazard Communication Standard (29 CFR 1910.1200) and the ANSI MSDS Standard (Z400.1) by the Chevron Energy Technology Company, 100 Chevron Way, Richmond, California 94802.

The above information is based on the data of which we are aware and is believed to be correct as of the date hereof. Since this information may be applied under conditions beyond our control and with which we may be unfamiliar and since data made available subsequent to the date hereof may suggest modifications of the information, we do not assume any responsibility for the results of its use. This information is furnished upon condition that the person receiving it shall make his own determination of the suitability of the material for his particular purpose.

SAFETY DATA SHEET

PROPANE

000003000646



Version 2.0

Revision Date 2016/07/20

Print Date 2016/07/20

SECTION 1. IDENTIFICATION

Product name : PROPANE

Synonyms : Propane HD-5, Propane commercial, Liquefied Petroleum Gas (LPG), C₃H₈, CGSB Propane Grade 1, CGSB Propane Grade 2, odorized propane, stench propane, automotive propane.

Product code : 100139

Manufacturer or supplier's details
Petro-Canada
P.O. Box 2844, 150 - 6th Avenue South-West
Calgary Alberta T2P 3E3
Canada

Emergency telephone number : Suncor Energy: +1 403-296-3000;
Poison Control Centre: Consult local telephone directory for emergency number(s).

Recommended use of the chemical and restrictions on use

Recommended use : Propane is used as a fuel gas, refrigerant and as a raw material for organic synthesis. It is also used as a laboratory gas. The grade determines the propane content. It is supplied as pressurized liquid in tanks.

Prepared by : Product Safety: +1 905-804-4752

SECTION 2. HAZARDS IDENTIFICATION

Emergency Overview

Appearance	Gas at room temperature; liquid when stored under pressure., Liquefied compressed gas.
Colour	colourless
Odour	Propane is an odourless gas. Odourized propane will contain up to 30 g Ethyl Mercaptan per 1000 L of propane.

GHS Classification

Flammable gases : Category 1

Gases under pressure : Liquefied gas

Simple Asphyxiant : Category 1

GHS label elements

SAFETY DATA SHEET

PROPANE

000003000646



Version 2.0

Revision Date 2016/07/20

Print Date 2016/07/20

Hazard pictograms



Signal word

: Danger

Hazard statements

: Extremely flammable gas.
Contains gas under pressure; may explode if heated.
May displace oxygen and cause rapid suffocation.

Precautionary statements

: **Prevention:**
Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.
Response:
Leaking gas fire: Do not extinguish, unless leak can be stopped safely.
In case of leakage, eliminate all ignition sources.
Storage:
Protect from sunlight. Store in a well-ventilated place.

Potential Health Effects

Primary Routes of Entry

: Eye contact
Inhalation
Skin contact

Inhalation

: Inhalation may cause central nervous system effects.
May cause respiratory tract irritation.
Inhalation of vapours may cause drowsiness, headache, dizziness, and disorientation.

Skin

: Contact with rapidly expanding gas may cause burns or frost-bite.

Eyes

: Contact with rapidly expanding gas may cause burns or frost-bite.

Ingestion

: Exposure by this route unlikely.

Aggravated Medical Condition

: Overexposure may lead to cardiac sensitization.

Other hazards

None known.

IARC

No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH

No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

SAFETY DATA SHEET

PROPANE

000003000646



Version 2.0

Revision Date 2016/07/20

Print Date 2016/07/20

SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Substance / Mixture : Mixture

Hazardous components

Chemical name	CAS-No.	Concentration
propane	74-98-6	90 - 100 %
propylene	115-07-1	1 - 5 %
butane	106-97-8	1 - 2.5 %
ethane	74-84-0	1 - 1.5 %
methane	74-82-8	0.1 - 0.2 %

SECTION 4. FIRST AID MEASURES

- If inhaled : Move to fresh air.
Artificial respiration and/or oxygen may be necessary.
Seek medical advice.
- In case of skin contact : In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes.
Wash skin thoroughly with soap and water or use recognized skin cleanser.
Wash contaminated clothing before reuse.
Seek medical advice.
- In case of eye contact : Remove contact lenses.
Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes.
Obtain medical attention.
- If swallowed : Not a significant route of exposure.
- Most important symptoms and effects, both acute and delayed : First aider needs to protect himself.

SECTION 5. FIREFIGHTING MEASURES

- Suitable extinguishing media : Use extinguishing measures that are appropriate to local circumstances and the surrounding environment.
- Unsuitable extinguishing media : No information available.
- Specific hazards during fire-fighting : If the product release cannot be shut off safely, allow the product to burn itself out.
Cool closed containers exposed to fire with water spray.
- Hazardous combustion prod- : Carbon oxides (CO, CO₂), smoke and irritating vapours as

SAFETY DATA SHEET

PROPANE

000003000646



Version 2.0

Revision Date 2016/07/20

Print Date 2016/07/20

ucts	products of incomplete combustion.
Further information	: Prevent fire extinguishing water from contaminating surface water or the ground water system.
Special protective equipment for firefighters	: Wear self-contained breathing apparatus and full protective wear. Wear a positive-pressure supplied-air respirator with full face-piece.

SECTION 6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures	: Use personal protective equipment. Ensure adequate ventilation. Evacuate personnel to safe areas. In case of inadequate ventilation wear respiratory protection. Remove all sources of ignition.
Environmental precautions	: If the product contaminates rivers and lakes or drains inform respective authorities.
Methods and materials for containment and cleaning up	: Prevent further leakage or spillage if safe to do so. Ensure adequate ventilation. Use explosion-proof ventilation equipment. Non-sparking tools should be used. Contact the proper local authorities.

SECTION 7. HANDLING AND STORAGE

Advice on safe handling	: For personal protection see section 8. Smoking, eating and drinking should be prohibited in the application area. In case of insufficient ventilation, wear suitable respiratory equipment. Avoid contact with skin, eyes and clothing. Avoid breathing gas. Avoid spark promoters. Ground/bond container and equipment. These alone may be insufficient to remove static electricity. Use only with adequate ventilation. Keep away from heat and sources of ignition. Keep container closed when not in use. Do not use sparking tools. Do not enter areas where used or stored until adequately ventilated.
Conditions for safe storage	: Store in original container. Containers which are opened must be carefully resealed and kept upright to prevent leakage. Keep in a dry, cool and well-ventilated place. Keep in properly labelled containers. To maintain product quality, do not store in heat or direct sunlight. Keep away from sources of ignition - No smoking.

SAFETY DATA SHEET

PROPANE

000003000646



Version 2.0

Revision Date 2016/07/20

Print Date 2016/07/20

Ensure the storage containers are grounded/bonded.

SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Components with workplace control parameters

Components	CAS-No.	Value type (Form of exposure)	Control parameters / Permissible concentration	Basis
propane	74-98-6	TWA	1,000 ppm	CA AB OEL
		TWA	1,000 ppm	CA BC OEL
		TWAEV	1,000 ppm 1,800 mg/m3	CA QC OEL
propylene	115-07-1	TWA	500 ppm 860 mg/m3	CA AB OEL
		TWA	500 ppm	CA BC OEL
		TWA	500 ppm	ACGIH
butane	106-97-8	TWA	1,000 ppm	CA AB OEL
		TWA	600 ppm	CA BC OEL
		STEL	750 ppm	CA BC OEL
		TWAEV	800 ppm 1,900 mg/m3	CA QC OEL
ethane	74-84-0	TWA	1,000 ppm	CA AB OEL
		TWA	1,000 ppm	CA BC OEL

Engineering measures : Use only in well-ventilated areas.
Use explosion-proof ventilation equipment.
Adequate ventilation to ensure that Occupational Exposure Limits are not exceeded.

Personal protective equipment

Respiratory protection : Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Filter type : Always wear NIOSH-approved self-contained breathing apparatus when handling this material.

Hand protection
Material : Wear insulated gloves to prevent frostbite.

Remarks : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary.

Eye protection : Wear face-shield and protective suit for abnormal processing problems.

Skin and body protection : Choose body protection in relation to its type, to the concentration and amount of dangerous substances, and to the specific work-place.

SAFETY DATA SHEET

PROPANE

000003000646



Version 2.0

Revision Date 2016/07/20

Print Date 2016/07/20

Protective measures	: Wash contaminated clothing before re-use. Wear suitable protective equipment.
Hygiene measures	: Remove and wash contaminated clothing and gloves, including the inside, before re-use. Wash face, hands and any exposed skin thoroughly after handling.

SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance	: Gas at room temperature; liquid when stored under pressure., Liquefied compressed gas.
Colour	: colourless
Odour	: Propane is an odourless gas. Odourized propane will contain up to 30 g Ethyl Mercaptan per 1000 L of propane.
Odour Threshold	: No data available
pH	: No data available
Pour point	: No data available
Boiling point/boiling range	: -42 °C (-44 °F)
Flash point	: -104 °C (-155 °F) Method: closed cup
Fire Point	: No data available
Auto-Ignition Temperature	: 450 °C (842 °F)
Evaporation rate	: No data available
Flammability	: Extremely flammable in presence of open flames, sparks, and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. Rapid escape of vapour may generate static charge causing ignition. May accumulate in confined spaces.
Upper explosion limit	: 9.5 %(V)
Lower explosion limit	: 2.1 %(V)
Vapour pressure	: 10,763 mmHg (38 °C / 100 °F)
Relative vapour density	: 1.56
Relative density	: No data available
Density	: No data available
Solubility(ies)	

SAFETY DATA SHEET

PROPANE

000003000646



Version 2.0

Revision Date 2016/07/20

Print Date 2016/07/20

Water solubility	: No data available
Partition coefficient: n-octanol/water	: No data available
Viscosity	
Viscosity, kinematic	: No data available
Explosive properties	: Do not pressurise, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition. Containers may explode in heat of fire. Vapour explosion hazard indoors, outdoors or in sewers. Propane may form explosive mixtures with air.

SECTION 10. STABILITY AND REACTIVITY

Possibility of hazardous reactions	: Hazardous polymerisation does not occur. Stable under normal conditions.
Conditions to avoid	: Heat, flames and sparks.
Incompatible materials	: Reactive with oxidising agents and halogenated compounds.
Hazardous decomposition products	: May release COx, smoke and irritating vapours when heated to decomposition.

SECTION 11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure

Eye contact

Inhalation

Skin contact

Acute toxicity

Product:

Acute oral toxicity : Remarks: No data available

Acute inhalation toxicity : Remarks: No data available

Acute dermal toxicity : Remarks: No data available

Components:

butane:

Acute inhalation toxicity : LC50 (Rat): 658 mg/l
Exposure time: 4 h
Test atmosphere: gas

Skin corrosion/irritation

Product:

Remarks: No data available

SAFETY DATA SHEET

PROPANE

000003000646



Version 2.0

Revision Date 2016/07/20

Print Date 2016/07/20

Serious eye damage/eye irritation

Product:

Remarks: No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

No data available

Reproductive toxicity

No data available

STOT - single exposure

No data available

STOT - repeated exposure

No data available

SECTION 12. ECOLOGICAL INFORMATION

Ecotoxicity

Product:

Toxicity to fish : Remarks: No data available

Toxicity to daphnia and other aquatic invertebrates : Remarks: No data available

Toxicity to algae : Remarks: No data available

Toxicity to bacteria : Remarks: No data available

Persistence and degradability

Product:

Biodegradability : Remarks: No data available

Bioaccumulative potential

No data available

Mobility in soil

No data available

SAFETY DATA SHEET

PROPANE

000003000646



Version 2.0

Revision Date 2016/07/20

Print Date 2016/07/20

Other adverse effects

No data available

SECTION 13. DISPOSAL CONSIDERATIONS

Disposal methods

Waste from residues : The product should not be allowed to enter drains, water courses or the soil.
Offer surplus and non-recyclable solutions to a licensed disposal company.
Waste must be classified and labelled prior to recycling or disposal.
Send to a licensed waste management company.
Dispose of as hazardous waste in compliance with local and national regulations.
Dispose of product residue in accordance with the instructions of the person responsible for waste disposal.

SECTION 14. TRANSPORT INFORMATION

International Regulations

IATA-DGR

UN/ID No. : UN 1978
Proper shipping name : Propane
Class : 2.1
Packing group : Not assigned by regulation
Labels : Class 2 - Gases: Flammable (Division 2.1)
Packing instruction (cargo aircraft) : 200

IMDG-Code

UN number : UN 1978
Proper shipping name : PROPANE

Class : 2.1
Packing group : Not assigned by regulation
Labels : 2.1
EmS Code : F-D, S-U
Marine pollutant : no

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

National Regulations

TDG

UN number : UN 1978
Proper shipping name : PROPANE

Class : 2.1
Packing group : Not assigned by regulation
Labels : 2.1
ERG Code : 115

SAFETY DATA SHEET

PROPANE

000003000646



Version 2.0

Revision Date 2016/07/20

Print Date 2016/07/20

Marine pollutant : no

SECTION 15. REGULATORY INFORMATION

This product has been classified according to the hazard criteria of the CPR and the MSDS contains all of the information required by the CPR.

The components of this product are reported in the following inventories:

DSL	On the inventory, or in compliance with the inventory
TSCA	All chemical substances in this product are either listed on the TSCA Inventory or are in compliance with a TSCA Inventory exemption.
EINECS	On the inventory, or in compliance with the inventory

SECTION 16. OTHER INFORMATION

For Copy of (M)SDS : Internet: www.petro-canada.ca/msds
Canada-wide: telephone: 1-800-668-0220; fax: 1-800-837-1228
For Product Safety Information: 1 905-804-4752

Prepared by : Product Safety: +1 905-804-4752

Revision Date : 2016/07/20

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

SAFETY DATA SHEET

SUPREME^{TM/MC} 5W-30



000003000704

Version 4.1

Revision Date 2017/03/02

Print Date 2017/03/02

SECTION 1. IDENTIFICATION

Product name : SUPREME^{TM/MC} 5W-30

Product code : MOSP53CBE, MOSP53P5R, MOSP53ICT, MOSP53IBC, MOSP53DRR, MOSP53DRM, MOSP53DCT, MOSP53C16, MOSP53C12, MOSP53, MOSP53BLK

Manufacturer or supplier's details
Petro-Canada Lubricants Inc.
2310 Lakeshore Road West
Mississauga ON L5J 1K2
Canada

Emergency telephone number
Petro-Canada Lubricants Inc.: +1 905-403-5770;
CHEMTREC Transport Emergency: 1-800-424-9300;
Poison Control Centre: Consult local telephone directory for emergency number(s).

Recommended use of the chemical and restrictions on use

Recommended use : Supreme motor oils are for use in all engines fuelled with gasoline, gasoline-ethanol blends up to E85, propane or CNG where the manufacturer recommends the use of API SN or SM quality oils. SAE 5W-20, 5W-30 and 10W-30 grades also meet the requirements of ILSAC GF-5 and GF-4.

Prepared by : Product Safety: +1 905-804-4752

SECTION 2. HAZARDS IDENTIFICATION

Emergency Overview

Appearance	viscous liquid
Colour	Light amber.
Odour	Mild petroleum oil like.

GHS Classification

Not a hazardous substance or mixture.

GHS label elements

Not a hazardous substance or mixture.

Potential Health Effects

Primary Routes of Entry : Eye contact
Ingestion
Inhalation
Skin contact

SAFETY DATA SHEET

SUPREME^{TM/MC} 5W-30



000003000704

Version 4.1

Revision Date 2017/03/02

Print Date 2017/03/02

Aggravated Medical Condition : None known.

Other hazards

None known.

IARC

No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH

No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Substance / Mixture : Mixture

Hazardous components

Chemical name	CAS-No.	Concentration
lubricating oils (petroleum), C15-30, hydrotreated neutral oil-based	72623-86-0	70 - 90 %
lubricating oils (petroleum), C20-50, hydrotreated neutral oil-based	72623-87-1	5 - 10 %

SECTION 4. FIRST AID MEASURES

- If inhaled : Move to fresh air.
Artificial respiration and/or oxygen may be necessary.
Seek medical advice.
- In case of skin contact : In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes.
Wash skin thoroughly with soap and water or use recognized skin cleanser.
Wash clothing before reuse.
Seek medical advice.
- In case of eye contact : Remove contact lenses.
Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes.
Obtain medical attention.
- If swallowed : Rinse mouth with water.
DO NOT induce vomiting unless directed to do so by a physician or poison control center.
Never give anything by mouth to an unconscious person.

SAFETY DATA SHEET

SUPREME^{TM/MC} 5W-30



000003000704

Version 4.1

Revision Date 2017/03/02

Print Date 2017/03/02

Seek medical advice.

Most important symptoms and effects, both acute and delayed : First aider needs to protect himself.

SECTION 5. FIREFIGHTING MEASURES

Suitable extinguishing media : Use extinguishing measures that are appropriate to local circumstances and the surrounding environment.

Unsuitable extinguishing media : No information available.

Specific hazards during fire-fighting : Cool closed containers exposed to fire with water spray.

Hazardous combustion products : Carbon oxides (CO, CO₂), smoke and irritating vapours as products of incomplete combustion.

Further information : Prevent fire extinguishing water from contaminating surface water or the ground water system.

SECTION 6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures : Use personal protective equipment.
Ensure adequate ventilation.
Evacuate personnel to safe areas.
Material can create slippery conditions.

Environmental precautions : If the product contaminates rivers and lakes or drains inform respective authorities.

Methods and materials for containment and cleaning up : Prevent further leakage or spillage if safe to do so.
Remove all sources of ignition.
Soak up with inert absorbent material.
Non-sparking tools should be used.
Ensure adequate ventilation.
Contact the proper local authorities.

SECTION 7. HANDLING AND STORAGE

Advice on safe handling : For personal protection see section 8.
Smoking, eating and drinking should be prohibited in the application area.
In case of insufficient ventilation, wear suitable respiratory equipment.
Avoid contact with skin, eyes and clothing.
Do not ingest.
Keep away from heat and sources of ignition.

SAFETY DATA SHEET

SUPREME^{TM/MC} 5W-30



000003000704

Version 4.1

Revision Date 2017/03/02

Print Date 2017/03/02

Keep container closed when not in use.

Conditions for safe storage : Store in original container.
Containers which are opened must be carefully resealed and kept upright to prevent leakage.
Keep in a dry, cool and well-ventilated place.
Keep in properly labelled containers.
To maintain product quality, do not store in heat or direct sunlight.

SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Components with workplace control parameters

Components	CAS-No.	Value type (Form of exposure)	Control parameters / Permissible concentration	Basis
lubricating oils (petroleum), C15-30, hydrotreated neutral oil-based	72623-86-0	TWA (Mist)	5 mg/m ³	CA AB OEL
		STEL (Mist)	10 mg/m ³	CA AB OEL
		TWAEV (Mist)	5 mg/m ³	CA QC OEL
		STEV (Mist)	10 mg/m ³	CA QC OEL
		TWA (Inhalable fraction)	5 mg/m ³	ACGIH
lubricating oils (petroleum), C20-50, hydrotreated neutral oil-based	72623-87-1	TWA (Mist)	5 mg/m ³	CA AB OEL
		STEL (Mist)	10 mg/m ³	CA AB OEL
		TWAEV (Mist)	5 mg/m ³	CA QC OEL
		STEV (Mist)	10 mg/m ³	CA QC OEL
		TWA (Inhalable fraction)	5 mg/m ³	ACGIH

Engineering measures : No special ventilation requirements. Good general ventilation should be sufficient to control worker exposure to airborne contaminants.

Personal protective equipment

Respiratory protection : Use respiratory protection unless adequate local exhaust ventilation is provided or exposure assessment demonstrates that exposures are within recommended exposure guidelines. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Filter type : organic vapour filter

Hand protection
Material : neoprene, nitrile, polyvinyl alcohol (PVA), Viton(R).

SAFETY DATA SHEET

SUPREME^{TM/MC} 5W-30



000003000704

Version 4.1

Revision Date 2017/03/02

Print Date 2017/03/02

Remarks	: Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary.
Eye protection	: Wear face-shield and protective suit for abnormal processing problems.
Skin and body protection	: Choose body protection in relation to its type, to the concentration and amount of dangerous substances, and to the specific work-place.
Protective measures	: Wash hands and face before breaks and immediately after handling the product. Wash contaminated clothing before re-use. Ensure that eyewash station and safety shower are proximal to the work-station location.
Hygiene measures	: Remove and wash contaminated clothing and gloves, including the inside, before re-use. Wash face, hands and any exposed skin thoroughly after handling.

SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance	: viscous liquid
Colour	: Light amber.
Odour	: Mild petroleum oil like.
Odour Threshold	: No data available
pH	: No data available
Pour point	: -45 °C (-49 °F)
Boiling point/boiling range	: No data available
Flash point	: 229 °C (444 °F) Method: Cleveland open cup
Fire Point	: No data available
Auto-Ignition Temperature	: No data available
Evaporation rate	: No data available
Flammability	: Low fire hazard. This material must be heated before ignition will occur.
Upper explosion limit	: No data available
Lower explosion limit	: No data available
Vapour pressure	: No data available
Relative vapour density	: No data available

SAFETY DATA SHEET

SUPREME^{TM/MC} 5W-30



000003000704

Version 4.1

Revision Date 2017/03/02

Print Date 2017/03/02

Density	: 0.8517 kg/l (15 °C / 59 °F)
Solubility(ies)	
Water solubility	: insoluble
Partition coefficient: n-octanol/water	: No data available
Viscosity	
Viscosity, kinematic	: 61.45 cSt (40 °C / 104 °F)
	10.69 cSt (100 °C / 212 °F)
Explosive properties	: Do not pressurise, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition.

SECTION 10. STABILITY AND REACTIVITY

Possibility of hazardous reactions	: Hazardous polymerisation does not occur. Stable under normal conditions.
Conditions to avoid	: No data available
Incompatible materials	: Reactive with oxidising agents and reducing agents.
Hazardous decomposition products	: May release CO _x , H ₂ S, metal oxides, smoke and irritating vapours when heated to decomposition.

SECTION 11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure

Eye contact
Ingestion
Inhalation
Skin contact

Acute toxicity

Product:

Acute oral toxicity	: Remarks: No data available
Acute inhalation toxicity	: Remarks: No data available
Acute dermal toxicity	: Remarks: No data available

Components:

lubricating oils (petroleum), C15-30, hydrotreated neutral oil-based:

Acute oral toxicity	: LD50 (Rat): > 5,000 mg/kg,
---------------------	------------------------------

SAFETY DATA SHEET

SUPREME^{TM/MC} 5W-30



000003000704

Version 4.1

Revision Date 2017/03/02

Print Date 2017/03/02

Acute inhalation toxicity : LC50 (Rat): > 5.2 mg/l
Exposure time: 4 h
Test atmosphere: dust/mist

Acute dermal toxicity : LD50 (Rabbit): > 2,000 mg/kg,

lubricating oils (petroleum), C20-50, hydrotreated neutral oil-based:

Acute oral toxicity : LD50 (Rat): > 5,000 mg/kg,

Acute inhalation toxicity : LC50 (Rat): > 5.2 mg/l
Exposure time: 4 h
Test atmosphere: dust/mist

Acute dermal toxicity : LD50 (Rabbit): > 2,000 mg/kg,

Skin corrosion/irritation

Product:

Remarks: No data available

Serious eye damage/eye irritation

Product:

Remarks: No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

No data available

Reproductive toxicity

No data available

STOT - single exposure

No data available

STOT - repeated exposure

No data available

SECTION 12. ECOLOGICAL INFORMATION

Ecotoxicity

Product:

SAFETY DATA SHEET

SUPREME^{TM/MC} 5W-30



000003000704

Version 4.1

Revision Date 2017/03/02

Print Date 2017/03/02

Toxicity to fish :
Remarks: No data available

Toxicity to daphnia and other :
aquatic invertebrates Remarks: No data available

Toxicity to algae :
Remarks: No data available

Toxicity to bacteria : Remarks: No data available

Persistence and degradability

Product:

Biodegradability : Remarks: No data available

Bioaccumulative potential

No data available

Mobility in soil

No data available

Other adverse effects

No data available

SECTION 13. DISPOSAL CONSIDERATIONS

Disposal methods

Waste from residues : The product should not be allowed to enter drains, water courses or the soil.
Offer surplus and non-recyclable solutions to a licensed disposal company.
Waste must be classified and labelled prior to recycling or disposal.
Send to a licensed waste management company.
Dispose of product residue in accordance with the instructions of the person responsible for waste disposal.

SECTION 14. TRANSPORT INFORMATION

International Regulations

IATA-DGR

Not regulated as a dangerous good

IMDG-Code

Not regulated as a dangerous good

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

Not applicable for product as supplied.

National Regulations

SAFETY DATA SHEET

SUPREME^{TM/MC} 5W-30

000003000704



Version 4.1

Revision Date 2017/03/02

Print Date 2017/03/02

TDG

Not regulated as a dangerous good

SECTION 15. REGULATORY INFORMATION

This product has been classified according to the hazard criteria of the CPR and the MSDS contains all of the information required by the CPR.

The components of this product are reported in the following inventories:

DSL	On the inventory, or in compliance with the inventory
TSCA	All chemical substances in this product are either listed on the TSCA Inventory or are in compliance with a TSCA Inventory exemption.
IECSC	On the inventory, or in compliance with the inventory
ELINCS	At least one component is not listed in EINECS but all such components are listed in ELINCS.

SECTION 16. OTHER INFORMATION

For Copy of SDS : Internet: lubricants.petro-canada.com/sds
Western Canada, telephone: 1-800-661-1199; fax: 1-800-378-4518
Ontario & Central Canada, telephone: 1-800-268-5850; fax: 1-800-201-6285
Quebec & Eastern Canada, telephone: 1-800-576-1686; fax: 1-800-201-6285
For Product Safety Information: 1 905-804-4752

Prepared by : Product Safety: +1 905-804-4752

Revision Date : 2017/03/02

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

SAFETY DATA SHEET

DURON^{TM/MC} -E 10W-30



000003001098

Version 3.0

Revision Date 2016/11/11

Print Date 2016/11/11

SECTION 1. IDENTIFICATION

Product name : DURON^{TM/MC} -E 10W-30

Product code : DE13ICT, DE13P5R, DE13P20, DE13IBC, DE13DRR, DE13DRM, DE13DCT, DE13C16, DE13C12, DE13, DE13BLK

Manufacturer or supplier's details
Petro-Canada Lubricants Inc.
2310 Lakeshore Road West
Mississauga ON L5J 1K2
Canada

Emergency telephone number
Suncor Energy: +1 403-296-3000;
Canutec Transportation: 1-888- 226-8832 (toll-free) or 613-996-6666;
Poison Control Centre: Consult local telephone directory for emergency number(s).

Recommended use of the chemical and restrictions on use

Recommended use : A superior performance heavy duty engine oil suitable for 4-stroke diesel, gasoline and natural gas automotive applications where SAE 10W-30 is recommended. Applications include vehicles equipped with exhaust after-treatment devices such as diesel particulate filters and catalytic converters. It is suitable for wet clutch transmission and hydraulic applications in mobile equipment where a 10W-30 engine oil is recommended.

Prepared by : Product Safety: +1 905-804-4752

SECTION 2. HAZARDS IDENTIFICATION

Emergency Overview

Appearance	viscous liquid
Colour	Light amber.
Odour	Mild petroleum oil like.

GHS Classification

Not a hazardous substance or mixture.

GHS label elements

Not a hazardous substance or mixture.

Potential Health Effects

Primary Routes of Entry : Eye contact

SAFETY DATA SHEET

DURON^{TM/MC} -E 10W-30

000003001098



Version 3.0

Revision Date 2016/11/11

Print Date 2016/11/11

Ingestion
Inhalation
Skin contact

Aggravated Medical Condition : None known.

Other hazards

None known.

IARC

No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH

No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Substance / Mixture : Mixture

Hazardous components

Chemical name	CAS-No.	Concentration
lubricating oils (petroleum), C15-30, hydrotreated neutral oil-based	72623-86-0	30 - 50 %
White mineral oil (petroleum)	8042-47-5	30 - 50 %
lubricating oils (petroleum), C20-50, hydrotreated neutral oil-based, high viscosity	72623-85-9	20 - 30 %
Zinc alkyldithiophosphate	113706-15-3	1 - 5 %

SECTION 4. FIRST AID MEASURES

If inhaled : Move to fresh air.
Artificial respiration and/or oxygen may be necessary.
Seek medical advice.

In case of skin contact : In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes.
Wash skin thoroughly with soap and water or use recognized skin cleanser.
Wash clothing before reuse.
Seek medical advice.

In case of eye contact : Remove contact lenses.
Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes.
Obtain medical attention.

SAFETY DATA SHEET

DURON^{TM/MC} -E 10W-30



000003001098

Version 3.0

Revision Date 2016/11/11

Print Date 2016/11/11

- | | |
|---|---|
| If swallowed | : Rinse mouth with water.
DO NOT induce vomiting unless directed to do so by a physician or poison control center.
Never give anything by mouth to an unconscious person.
Seek medical advice. |
| Most important symptoms and effects, both acute and delayed | : First aider needs to protect himself. |

SECTION 5. FIREFIGHTING MEASURES

- | | |
|---------------------------------------|--|
| Suitable extinguishing media | : Use extinguishing measures that are appropriate to local circumstances and the surrounding environment. |
| Unsuitable extinguishing media | : No information available. |
| Specific hazards during fire-fighting | : Cool closed containers exposed to fire with water spray. |
| Hazardous combustion products | : Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), phosphorus oxides (PO _x), sulphur compounds (H ₂ S), zinc oxides (ZnO _x), metal oxides, hydrocarbons, smoke and irritating vapours as products of incomplete combustion. |
| Further information | : Prevent fire extinguishing water from contaminating surface water or the ground water system. |

SECTION 6. ACCIDENTAL RELEASE MEASURES

- | | |
|---|---|
| Personal precautions, protective equipment and emergency procedures | : Use personal protective equipment.
Ensure adequate ventilation.
Evacuate personnel to safe areas.
Material can create slippery conditions. |
| Environmental precautions | : If the product contaminates rivers and lakes or drains inform respective authorities. |
| Methods and materials for containment and cleaning up | : Prevent further leakage or spillage if safe to do so.
Remove all sources of ignition.
Soak up with inert absorbent material.
Non-sparking tools should be used.
Ensure adequate ventilation.
Contact the proper local authorities. |

SECTION 7. HANDLING AND STORAGE

- | | |
|-------------------------|--|
| Advice on safe handling | : For personal protection see section 8.
Smoking, eating and drinking should be prohibited in the ap- |
|-------------------------|--|

SAFETY DATA SHEET

DURON^{TM/MC} -E 10W-30

000003001098



Version 3.0

Revision Date 2016/11/11

Print Date 2016/11/11

plication area.
In case of insufficient ventilation, wear suitable respiratory equipment.
Avoid contact with skin, eyes and clothing.
Do not ingest.
Keep away from heat and sources of ignition.
Keep container closed when not in use.

Conditions for safe storage : Store in original container.
Containers which are opened must be carefully resealed and kept upright to prevent leakage.
Keep in a dry, cool and well-ventilated place.
Keep in properly labelled containers.
To maintain product quality, do not store in heat or direct sunlight.

SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Components with workplace control parameters

Components	CAS-No.	Value type (Form of exposure)	Control parameters / Permissible concentration	Basis
lubricating oils (petroleum), C15-30, hydrotreated neutral oil-based	72623-86-0	TWA (Mist)	5 mg/m3	CA AB OEL
		STEL (Mist)	10 mg/m3	CA AB OEL
		TWAEV (Mist)	5 mg/m3	CA QC OEL
		STEV (Mist)	10 mg/m3	CA QC OEL
		TWA (Inhalable fraction)	5 mg/m3	ACGIH
White mineral oil (petroleum)	8042-47-5	TWA (Mist)	5 mg/m3	CA AB OEL
		STEL (Mist)	10 mg/m3	CA AB OEL
		TWAEV (Mist)	5 mg/m3	CA QC OEL
		STEV (Mist)	10 mg/m3	CA QC OEL
		TWA (Inhalable fraction)	5 mg/m3	ACGIH
lubricating oils (petroleum), C20-50, hydrotreated neutral oil-based, high viscosity	72623-85-9	TWA (Mist)	5 mg/m3	CA AB OEL
		STEL (Mist)	10 mg/m3	CA AB OEL
		TWAEV (Mist)	5 mg/m3	CA QC OEL
		STEV (Mist)	10 mg/m3	CA QC OEL
		TWA (Inhalable fraction)	5 mg/m3	ACGIH

Engineering measures : No special ventilation requirements. Good general ventilation should be sufficient to control worker exposure to airborne contaminants.

Personal protective equipment

SAFETY DATA SHEET

DURON^{TM/MC} -E 10W-30



000003001098

Version 3.0

Revision Date 2016/11/11

Print Date 2016/11/11

Respiratory protection	: Use respiratory protection unless adequate local exhaust ventilation is provided or exposure assessment demonstrates that exposures are within recommended exposure guidelines. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.
Filter type	: organic vapour filter
Hand protection Material	: neoprene, nitrile, polyvinyl alcohol (PVA), Viton(R).
Remarks	: Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary.
Eye protection	: Wear face-shield and protective suit for abnormal processing problems.
Skin and body protection	: Choose body protection in relation to its type, to the concentration and amount of dangerous substances, and to the specific work-place.
Protective measures	: Wash hands and face before breaks and immediately after handling the product. Wash contaminated clothing before re-use. Ensure that eyewash station and safety shower are proximal to the work-station location.
Hygiene measures	: Remove and wash contaminated clothing and gloves, including the inside, before re-use. Wash face, hands and any exposed skin thoroughly after handling.

SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance	: viscous liquid
Colour	: Light amber.
Odour	: Mild petroleum oil like.
Odour Threshold	: No data available
pH	: No data available
Pour point	: -42 °C (-44 °F)
Boiling point/boiling range	: No data available
Flash point	: 220 °C (428 °F) Method: Cleveland open cup
Fire Point	: 241 °C (466 °F)

SAFETY DATA SHEET

DURON^{TM/MC} -E 10W-30



000003001098

Version 3.0

Revision Date 2016/11/11

Print Date 2016/11/11

Auto-Ignition Temperature	: No data available
Evaporation rate	: No data available
Flammability	: Low fire hazard. This material must be heated before ignition will occur.
Upper explosion limit	: No data available
Lower explosion limit	: No data available
Vapour pressure	: No data available
Relative vapour density	: No data available
Relative density	: No data available
Density	: 0.8627 kg/l (15 °C / 59 °F)
Solubility(ies)	
Water solubility	: insoluble
Partition coefficient: n-octanol/water	: No data available
Viscosity	
Viscosity, kinematic	: 80.1 cSt (40 °C / 104 °F) 12.00 cSt (100 °C / 212 °F)
Explosive properties	: Do not pressurise, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition.

SECTION 10. STABILITY AND REACTIVITY

Possibility of hazardous reactions	: Hazardous polymerisation does not occur. Stable under normal conditions.
Conditions to avoid	: No data available
Incompatible materials	: Reactive with oxidizing agents and water.
Hazardous decomposition products	: May release CO _x , H ₂ S, smoke and irritating vapours when heated to decomposition.

SECTION 11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure

Eye contact
Ingestion
Inhalation
Skin contact

SAFETY DATA SHEET

DURON^{TM/MC} -E 10W-30



000003001098

Version 3.0

Revision Date 2016/11/11

Print Date 2016/11/11

Acute toxicity

Product:

- Acute oral toxicity : Remarks: No data available
- Acute inhalation toxicity : Remarks: No data available
- Acute dermal toxicity : Assessment: The substance or mixture has no acute dermal toxicity

Components:

lubricating oils (petroleum), C15-30, hydrotreated neutral oil-based:

- Acute oral toxicity : LD50 (Rat): > 5,000 mg/kg,
- Acute inhalation toxicity : LC50 (Rat): > 5.2 mg/l
Exposure time: 4 h
Test atmosphere: dust/mist
- Acute dermal toxicity : LD50 (Rabbit): > 2,000 mg/kg,

White mineral oil (petroleum):

- Acute oral toxicity : LD50 (Rat): > 5,000 mg/kg,
- Acute inhalation toxicity : LC50 (Rat): > 5.2 mg/l
Exposure time: 4 h
Test atmosphere: dust/mist
- Acute dermal toxicity : LD50 (Rabbit): > 2,000 mg/kg,

lubricating oils (petroleum), C20-50, hydrotreated neutral oil-based, high viscosity:

- Acute oral toxicity : LD50 (Rat): > 5,000 mg/kg,
- Acute inhalation toxicity : LC50 (Rat): > 5.2 mg/l
Exposure time: 4 h
Test atmosphere: dust/mist
- Acute dermal toxicity : LD50 (Rabbit): > 2,000 mg/kg,

Skin corrosion/irritation

Product:

Remarks: No data available

Serious eye damage/eye irritation

Product:

Remarks: No data available

Respiratory or skin sensitisation

No data available

SAFETY DATA SHEET

DURON^{TM/MC} -E 10W-30



000003001098

Version 3.0

Revision Date 2016/11/11

Print Date 2016/11/11

Germ cell mutagenicity

No data available

Carcinogenicity

No data available

Reproductive toxicity

No data available

STOT - single exposure

No data available

STOT - repeated exposure

No data available

SECTION 12. ECOLOGICAL INFORMATION

Ecotoxicity

Product:

Toxicity to fish : Remarks: No data available

Toxicity to daphnia and other aquatic invertebrates : Remarks: No data available

Toxicity to algae : Remarks: No data available

Toxicity to bacteria : Remarks: No data available

Persistence and degradability

Product:

Biodegradability : Remarks: No data available

Bioaccumulative potential

No data available

Mobility in soil

No data available

Other adverse effects

No data available

SECTION 13. DISPOSAL CONSIDERATIONS

Disposal methods

Waste from residues : The product should not be allowed to enter drains, water courses or the soil.
Offer surplus and non-recyclable solutions to a licensed dis-

SAFETY DATA SHEET

DURON^{TM/MC} -E 10W-30

000003001098



Version 3.0

Revision Date 2016/11/11

Print Date 2016/11/11

posal company.
Waste must be classified and labelled prior to recycling or disposal.
Send to a licensed waste management company.
Dispose of product residue in accordance with the instructions of the person responsible for waste disposal.

SECTION 14. TRANSPORT INFORMATION

International Regulations

IATA-DGR

Not regulated as a dangerous good

IMDG-Code

Not regulated as a dangerous good

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

Not applicable for product as supplied.

National Regulations

TDG

Not regulated as a dangerous good

SECTION 15. REGULATORY INFORMATION

This product has been classified according to the hazard criteria of the CPR and the MSDS contains all of the information required by the CPR.

The components of this product are reported in the following inventories:

DSL

On the inventory, or in compliance with the inventory

TSCA

All chemical substances in this product are either listed on the TSCA Inventory or are in compliance with a TSCA Inventory exemption.

ELINCS

At least one component is not listed in EINECS but all such components are listed in ELINCS.

SECTION 16. OTHER INFORMATION

For Copy of SDS

: Internet: lubricants.petro-canada.ca/msds
Western Canada, telephone: 1-800-661-1199; fax: 1-800-378-4518
Ontario & Central Canada, telephone: 1-800-268-5850; fax: 1-800-201-6285
Quebec & Eastern Canada, telephone: 1-800-576-1686; fax: 1-800-201-6285
For Product Safety Information: 1 905-804-4752

Prepared by

: Product Safety: +1 905-804-4752

SAFETY DATA SHEET

DURON^{TM/MC} -E 10W-30

000003001098



Version 3.0

Revision Date 2016/11/11

Print Date 2016/11/11

Revision Date : 2016/11/11

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

Material Safety Data Sheet

TWO CYCLE MOTOR OIL



000003000604

Version 2.0

Revision Date 2014/08/08

Print Date 2014/08/08

SECTION 1. PRODUCT AND COMPANY IDENTIFICATION

Product name : TWO CYCLE MOTOR OIL

Product code : TWOCYCDRM, TWOCYCC12, TWOCYC, TWOCYCBK

Manufacturer or supplier's details

Petro-Canada Lubricants Inc.
2310 Lakeshore Road West
Mississauga ON L5J 1K2
Canada

Petro-Canada America Lubricants Inc.
115N Oak Park Avenue #1C
Oak Park IL 60301-1366
United States

Emergency telephone number : Suncor Energy: +1 403-296-3000;
Poison Control Centre: Consult local telephone directory for emergency number(s).

Recommended use of the chemical and restrictions on use

Recommended use : A low ash 2-cycle engine oil designed to lubricate conventional pre-mixed fuel/oil as well as oil injection lubricated engines powering air-cooled two-stroke cycle engines.

Prepared by : Product Safety: +1 905-804-4752

SECTION 2. HAZARDS IDENTIFICATION

Emergency Overview

Form	viscous liquid
Colour	Blue-green.
Odour	Mild petroleum oil like.

Potential Health Effects

Primary Routes of Entry : Eye contact
Ingestion
Inhalation
Skin contact

Aggravated Medical Condition : None known.

Carcinogenicity:

IARC

No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

Material Safety Data Sheet

TWO CYCLE MOTOR OIL



000003000604

Version 2.0

Revision Date 2014/08/08

Print Date 2014/08/08

OSHA	No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.
NTP	No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.
ACGIH	No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Pure substance/mixture : Mixture

Hazardous components

No hazardous ingredients

SECTION 4. FIRST AID MEASURES

If inhaled	: Move to fresh air. Artificial respiration and/or oxygen may be necessary. Seek medical advice.
In case of skin contact	: In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Wash skin thoroughly with soap and water or use recognized skin cleanser. Wash clothing before reuse. Seek medical advice.
In case of eye contact	: Remove contact lenses. Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Obtain medical attention.
If swallowed	: Rinse mouth with water. DO NOT induce vomiting unless directed to do so by a physician or poison control center. Never give anything by mouth to an unconscious person. Seek medical advice.
Most important symptoms and effects, both acute and delayed	: First aider needs to protect himself.

SECTION 5. FIREFIGHTING MEASURES

Suitable extinguishing media : Use extinguishing measures that are appropriate to local

Material Safety Data Sheet

TWO CYCLE MOTOR OIL



000003000604

Version 2.0

Revision Date 2014/08/08

Print Date 2014/08/08

circumstances and the surrounding environment.

Unsuitable extinguishing media	: No information available.
Specific hazards during firefighting	: Cool closed containers exposed to fire with water spray.
Hazardous combustion products	: Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), phosphorus oxides (PO _x), hydrocarbons, aldehydes, smoke and irritating vapours as products of incomplete combustion.
Specific extinguishing methods	: Prevent fire extinguishing water from contaminating surface water or the ground water system.

SECTION 6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures	: Use personal protective equipment. Ensure adequate ventilation. Evacuate personnel to safe areas. Material can create slippery conditions.
Environmental precautions	: If the product contaminates rivers and lakes or drains inform respective authorities.
Methods and materials for containment and cleaning up	: Prevent further leakage or spillage if safe to do so. Remove all sources of ignition. Soak up with inert absorbent material. Non-sparking tools should be used. Ensure adequate ventilation. Contact the proper local authorities.

SECTION 7. HANDLING AND STORAGE

Advice on safe handling	: For personal protection see section 8. Smoking, eating and drinking should be prohibited in the application area. In case of insufficient ventilation, wear suitable respiratory equipment. Avoid contact with skin, eyes and clothing. Do not ingest. Keep away from heat and sources of ignition. Keep container closed when not in use.
Conditions for safe storage	: Store in original container. Containers which are opened must be carefully resealed and kept upright to prevent leakage. Keep in a dry, cool and well-ventilated place. Keep in properly labelled containers. To maintain product quality, do not store in heat or direct sunlight.

Material Safety Data Sheet

TWO CYCLE MOTOR OIL



000003000604

Version 2.0

Revision Date 2014/08/08

Print Date 2014/08/08

SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Components with workplace control parameters

Contains no substances with occupational exposure limit values.

Engineering measures : No special ventilation requirements. Good general ventilation should be sufficient to control worker exposure to airborne contaminants.
Adequate ventilation to ensure that Occupational Exposure Limits are not exceeded.

Personal protective equipment

Respiratory protection : Use respiratory protection unless adequate local exhaust ventilation is provided or exposure assessment demonstrates that exposures are within recommended exposure guidelines. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.
Recommended Filter type:

Filter type : organic vapour filter

Hand protection
Material : neoprene, nitrile, polyvinyl alcohol (PVA), Viton(R).
Remarks : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary.

Eye protection : Wear face-shield if splashing hazard is likely.

Skin and body protection : Choose body protection in relation to its type, to the concentration and amount of dangerous substances, and to the specific work-place.

Protective measures : Wash hands and face before breaks and immediately after handling the product.
Wash contaminated clothing before re-use.
Ensure that eyewash station and safety shower are proximal to the work-station location.

Hygiene measures : Remove and wash contaminated clothing and gloves, including the inside, before re-use.
Wash face, hands and any exposed skin thoroughly after handling.

SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance : viscous liquid

Colour : Blue-green.

Material Safety Data Sheet

TWO CYCLE MOTOR OIL



000003000604

Version 2.0

Revision Date 2014/08/08

Print Date 2014/08/08

Odour	: Mild petroleum oil like.
Odour Threshold	: No data available
pH	: No data available
Pour point	: -48 °C (-54 °F)
Boiling point/boiling range	: No data available
Flash point	: 149 °C (300 °F) Method: Cleveland open cup
Fire Point	: No data available
Auto-Ignition Temperature	: No data available
Evaporation rate	: No data available
Flammability	: Low fire hazard. This material must be heated before ignition will occur.
Upper explosion limit	: No data available
Lower explosion limit	: No data available
Vapour pressure	: No data available
Density	: 0.8508 kg/l (15 °C / 59 °F)
Solubility(ies)	
Water solubility	: insoluble
Partition coefficient: n-octanol/water	: No data available
Viscosity	
Viscosity, kinematic	: 37.1 cSt (40 °C / 104 °F) 7.03 cSt (100 °C / 212 °F)
Explosive properties	: Do not pressurise, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition.

SECTION 10. STABILITY AND REACTIVITY

Possibility of hazardous reactions	: Hazardous polymerisation does not occur. Stable under normal conditions. No dangerous reaction known under conditions of normal use.
Conditions to avoid	: No data available
Incompatible materials	: Reactive with oxidising agents, reducing agents, and acids.

Hazardous decomposition : May release CO_x, NO_x, SO_x, aldehydes, methacrylate
Internet: lubricants.petro-canada.ca/msds
Petro-Canada is a Suncor Energy business.

Material Safety Data Sheet

TWO CYCLE MOTOR OIL



000003000604

Version 2.0

Revision Date 2014/08/08

Print Date 2014/08/08

products

monomers, hydrocarbons, smoke and irritating vapours when heated to decomposition.

SECTION 11. TOXICOLOGICAL INFORMATION

Acute toxicity

Product:

Acute oral toxicity : Remarks: No data available

Acute inhalation toxicity : Remarks: No data available

Acute dermal toxicity : Remarks: No data available

Skin corrosion/irritation

Product:

Result: Mild skin irritation

Serious eye damage/eye irritation

Product:

Result: Mild eye irritation

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

No data available

Reproductive toxicity

No data available

STOT - single exposure

No data available

STOT - repeated exposure

No data available

Aspiration toxicity

No data available

SECTION 12. ECOLOGICAL INFORMATION

Ecotoxicity

Internet: lubricants.petro-canada.ca/msds
Petro-Canada is a Suncor Energy business.

Page: 6 / 9
™ Trademark of Suncor Energy Inc. Used under licence.

Material Safety Data Sheet

TWO CYCLE MOTOR OIL



000003000604

Version 2.0

Revision Date 2014/08/08

Print Date 2014/08/08

Product:

Toxicity to fish : Remarks: No data available

Toxicity to daphnia and other aquatic invertebrates : Remarks: No data available

Toxicity to algae : Remarks: No data available

Toxicity to bacteria : Remarks: No data available

Persistence and degradability

Product:

Biodegradability : Remarks: No data available

No data available

Bioaccumulative potential

Product:

Partition coefficient: n-octanol/water : Remarks: No data available

Mobility in soil

No data available

Other adverse effects

No data available

Product:

Additional ecological information : No data available

SECTION 13. DISPOSAL CONSIDERATIONS

Disposal methods

Waste from residues : The product should not be allowed to enter drains, water courses or the soil.
Offer surplus and non-recyclable solutions to a licensed disposal company.
Waste must be classified and labelled prior to recycling or disposal.
Send to a licensed waste management company.
Dispose of as hazardous waste in compliance with local and national regulations.
Dispose of product residue in accordance with the instructions of the person responsible for waste disposal.

Contaminated packaging : Do not re-use empty containers.

SECTION 14. TRANSPORT INFORMATION

Material Safety Data Sheet

TWO CYCLE MOTOR OIL



000003000604

Version 2.0

Revision Date 2014/08/08

Print Date 2014/08/08

International Regulation

IATA-DGR

Not regulated as a dangerous good

IMDG-Code

Not regulated as a dangerous good

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

Not applicable for product as supplied.

49 CFR

Not regulated as a dangerous good

TDG

Not regulated as a dangerous good

Special precautions for user

Not applicable

SECTION 15. REGULATORY INFORMATION

OSHA Hazards	: This material is non-hazardous as defined by the American OSHA Hazard Communication Standard.
WHMIS Classification	: Not Rated

The components of this product are reported in the following inventories:

DSL	On the inventory, or in compliance with the inventory
TSCA	All chemical substances in this product are either listed on the TSCA Inventory or are in compliance with a TSCA Inventory exemption.
ELINCS	At least one component is not listed in EINECS but all such components are listed in ELINCS.
IECSC	On the inventory, or in compliance with the inventory

SECTION 16. OTHER INFORMATION

Material Safety Data Sheet

TWO CYCLE MOTOR OIL



000003000604


Version 2.0

Revision Date 2014/08/08

Print Date 2014/08/08

Further information

NFPA:



HMIS III:

HEALTH	1
FLAMMABILITY	1
PHYSICAL HAZARD	0
PERSONAL PROTECTION	B

0 = not significant, 1 = Slight,
2 = Moderate, 3 = High
4 = Extreme, * = Chronic

For Copy of (M)SDS

: The Canadian Controlled Products Regulations (CPR) (Under the Hazardous Products Act, part of the WHMIS legislation) only apply to WHMIS Controlled (i.e., hazardous) products. Therefore, the CPR and the 3-year update rule specified therein do not apply to WHMIS Non-Controlled products. Although this is true, customarily Petro-Canada reviews and updates Non-Controlled product MSDS if a customer requests such an update. These Non-Controlled product updates are given a lower priority than Controlled products but are handled as soon as practicable. If you would like to verify if the MSDS you have is the most current, or you require any further information, please contact:

Internet: lubricants.petro-canada.ca/msds

Western Canada, telephone: 1-800-661-1199; fax: 1-800-378-4518

Ontario & Central Canada, telephone: 1-800-268-5850; fax: 1-800-201-6285

Quebec & Eastern Canada, telephone: 1-800-576-1686; fax: 1-800-201-6285

United States, telephone: 1-800-268-5850; fax: 1-800-201-6285

For Product Safety Information: 1 905-804-4752

Prepared by

: Product Safety: +1 905-804-4752

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

USED OIL

MATERIAL SAFETY DATA SHEET



SECTION 1: PRODUCT AND COMPANY IDENTIFICATION

PRODUCT NAME: USED OIL

SYNONYMS: Waste oil; Used lubricating oil; Oil and water mixture

**PRODUCT PART
NUMBER(S):** Not applicable.

PRODUCT USE: Oil or water mixture for re-refining or reprocessing.
If this product is used in combination with other products, refer to the
Material Safety Data Sheets for those products.

**24-HOUR EMERGENCY PHONE NUMBERS
MEDICAL AND TRANSPORTATION (SPILL):**

These numbers are for
emergency use only. If
you desire non-emergency
product information,
please call a phone
number listed below.

1-800-468-1760

MANUFACTURER/ SUPPLIER: Safety-Kleen Systems, Inc.
5400 Legacy Drive
Cluster II, Building 3
Plano, Texas 75024
USA
1-800-669-5740
www.Safety-Kleen.com

TECHNICAL INFORMATION: 1-800-669-5740 Press 1 then 1 then Extension 7500

MSDS FORM NUMBER: 81451 **ISSUE:** September 20, 2007

ORIGINAL ISSUE: January 15, 1990 **SUPERSEDES:** June 11, 2007

PREPARED BY: Product MSDS Coordinator **APPROVED BY:** MSDS Task Force

Revision 9/07; MSDS Form No. 81451 - Page 1 of 10

USED OIL MATERIAL SAFETY DATA SHEET

SECTION 2: COMPOSITION/INFORMATION ON INGREDIENTS

WT%	NAME	SYNONYM	CAS NO.	OSHA PEL		ACGIH TLV®		LD ^a	LC ^b
				TWA	STEL	TWA	STEL		
80 to 100	Lubricating oils, used	Used oil	70514-12-4	N. Av.	N. Av.	N. Av.	N. Av.	N. Av.	N. Av.
0 to 20*	Water/solids	N. Av.	N. Av.	N. Av.	N. Av.	N. Av.	N. Av.	N. Av.	N. Av.
0 to 10*	Hydrocarbon solvents. May include gasoline, diesel fuel, jet fuel, mineral spirits, etc.	N. Av.	N. Av.	N. Av.	N. Av.	N. Av.	N. Av.	N. Av.	N. Av.
0 to 1.5*	Metals. May include lead, iron, zinc, copper, chromium, arsenic, nickel, and others: each below 1.0 WT%.	N. Av.	N. Av.	N. Av.	N. Av.	N. Av.	N. Av.	N. Av.	N. Av.
0 to 1.0*	Polynuclear aromatics. May include naphthalene, fluoranthene, phenanthrene, pyrene, and others: each below 0.3 WT%.	N. Av.	N. Av.	N. Av.	N. Av.	N. Av.	N. Av.	N. Av.	N. Av.
0 to 0.5*	Chlorinated solvents.	N. Av.	N. Av.	N. Av.	N. Av.	N. Av.	N. Av.	N. Av.	N. Av.

N.Av. = Not Available *Even though the concentration range does not fall under the ranges prescribed by WHMIS, this is the actual range which varies with each batch of the product.

^aOral-Rat LD₅₀ (mg/kg)
^bInhalation-Rat LC₅₀

SECTION 3: HAZARDS IDENTIFICATION

EMERGENCY OVERVIEW

APPEARANCE

Liquid, black and viscous (thick), petroleum odor.

WARNING!

PHYSICAL HAZARDS

Combustible liquid.

HEALTH HAZARDS

May be harmful if inhaled.

May be harmful if absorbed through skin.

May be harmful or fatal if swallowed.

May irritate the respiratory tract (nose, throat, and lungs), eyes, and skin.

Suspect cancer hazard. Contains material which can cause cancer. Risk of cancer depends on duration and level of exposure.

Contains material which can cause birth defects.

Contains material which can cause central nervous system damage.

ENVIRONMENTAL HAZARDS

Product may be toxic to fish, plants, wildlife, and/or domestic animals.

Revision 9/07; MSDS Form No. 81451 - Page 2 of 10

USED OIL
MATERIAL SAFETY DATA SHEET

POTENTIAL HEALTH EFFECTS

Effects may vary depending on material composition. Typical effects may include:

INHALATION (BREATHING): High concentrations of vapor or mist may be harmful if inhaled. High concentrations of vapor or mist may irritate the respiratory tract (nose, throat, and lungs). High concentrations of vapor or mist may cause nausea, vomiting, headaches, dizziness, loss of coordination, numbness, and other central nervous system effects. Massive acute overexposure may cause rapid central nervous system depression, sudden collapse, coma, and/or death.

EYES: May cause irritation.

SKIN: May cause irritation. Product may be absorbed through the skin and cause harm as noted under **INHALATION (BREATHING)**.

INGESTION (SWALLOWING): May be harmful or fatal if swallowed. May cause throat irritation, nausea, vomiting, and central nervous system effects as noted under **INHALATION (BREATHING)**. Breathing product into the lungs during ingestion or vomiting may cause lung injury and possible death.

MEDICAL CONDITIONS AGGRAVATED BY EXPOSURE: Individuals with pre-existing cardiovascular, liver, kidney, respiratory tract (nose, throat, and lungs), central nervous system, eye, and/or skin disorders may have increased susceptibility to the effects of exposure.

CHRONIC: Prolonged or repeated inhalation may cause oil pneumonia, lung tissue inflammation, fibrous tissue formation, and/or toxic effects as noted under **INHALATION (BREATHING)**. Prolonged or repeated eye contact may cause inflammation of the membrane lining the eyelids and covering the eyeball (conjunctivitis). Prolonged or repeated skin contact may cause drying, cracking, redness, itching, and/or swelling (dermatitis).

CANCER INFORMATION: This product contains mineral oils, untreated or mildly treated, which can cause cancer. This product may contain hydrocarbon and chlorinated solvents; metals, and polynuclear aromatics which can cause cancer. Risk of cancer depends on duration and level of exposure. For more information, see **SECTION 11: CARCINOGENICITY**.

POTENTIAL ENVIRONMENTAL EFFECTS

Product may be toxic to fish, plants, wildlife, and/or domestic animals. Also see **SECTION 12: ECOLOGICAL INFORMATION**.

Revision 9/07; MSDS Form No. 81451 - Page 3 of 10

USED OIL
MATERIAL SAFETY DATA SHEET

SECTION 4: FIRST AID MEASURES

INHALATION: (BREATHING)	Remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Oxygen should only be administered by qualified personnel. Someone should stay with victim. Get medical attention if breathing difficulty persists.
EYES:	If irritation or redness from exposure to vapor develops, move away from exposure into fresh air. Upon contact, immediately flush eyes with plenty of lukewarm water, holding eyelids apart, for 15 minutes. Get medical attention.
SKIN:	Remove affected clothing and shoes. Wash skin thoroughly with soap and water. Get medical attention if irritation or pain develops or persists.
INGESTION: (SWALLOWING)	Do NOT induce vomiting. Immediately get medical attention. Call 1-800-468-1760 for additional information. If spontaneous vomiting occurs, keep head below hips to avoid breathing the product into the lungs. Never give anything to an unconscious person by mouth.
NOTE TO PHYSICIANS:	Treat symptomatically and supportively. Treatment may vary with condition of victim and specifics of incident. Call 1-800-468-1760 for additional information.

SECTION 5: FIRE FIGHTING MEASURES


FLASH POINT:	>200°F (93°C) (minimum) Pensky-Martens Closed Cup
FLAMMABLE LIMITS IN AIR:	Not available.
AUTOIGNITION TEMPERATURE:	Not available.
HAZARDOUS COMBUSTION PRODUCTS:	Decomposition and combustion materials may be toxic. Burning may produce phosgene gas, nitrogen oxides, carbon monoxide, and unidentified organic compounds.
CONDITIONS OF FLAMMABILITY:	Heat, sparks, or flame. Product may burn but does not ignite readily.
EXTINGUISHING MEDIA:	Use carbon dioxide, regular foam, dry chemical, water spray, or water fog.

Revision 9/07; MSDS Form No. 81451 - Page 4 of 10

USED OIL MATERIAL SAFETY DATA SHEET

NFPA 704 HAZARD IDENTIFICATION:

This information is intended solely for the use by individuals trained in this system.

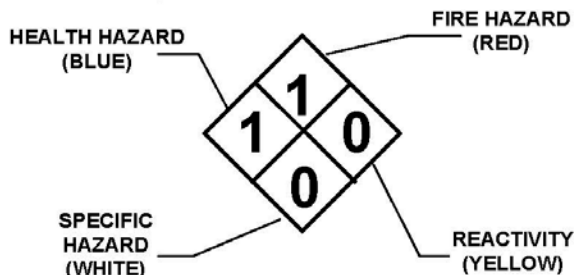

FIRE FIGHTING INSTRUCTIONS:

Keep storage containers cool with water spray. A positive-pressure, self-contained breathing apparatus (SCBA) and full-body protective equipment are required for fire emergencies.

FIRE AND EXPLOSION HAZARDS:

Heated containers may rupture. "Empty" containers may retain residue and can be dangerous. Product is not sensitive to mechanical impact. Product may be sensitive to static discharge, which could result in fire or explosion.

SECTION 6: ACCIDENTAL RELEASE MEASURES

Remove all ignition sources. Do not touch or walk through spilled product. Stop leak if you can do it without risk. Wear protective equipment and provide engineering controls as specified in **SECTION 8: EXPOSURE CONTROLS/PERSONAL PROTECTION**. Isolate hazard area. Keep unnecessary and unprotected personnel from entering. Ventilate area and avoid breathing vapor or mist. A vapor suppressing foam may be used to reduce vapors. Contain spill away from surface waters and sewers. Contain spill as a liquid for possible recovery, or sorb with compatible sorbent material and shovel with a clean, sparkproof tool into a sealable container for disposal.

Additionally, for large spills: Water spray may reduce vapor, but may not prevent ignition in closed spaces. Dike far ahead of liquid spill for collection and later disposal.

There may be specific federal regulatory reporting requirements associated with spills, leaks, or releases of this product. Also see **SECTION 15: REGULATORY INFORMATION**.

Revision 9/07; MSDS Form No. 81451 - Page 5 of 10

USED OIL
MATERIAL SAFETY DATA SHEET

SECTION 7: HANDLING AND STORAGE

- HANDLING:** Keep away from heat, sparks, or flame. Where flammable mixtures may be present, equipment safe for such locations should be used. Use clean, sparkproof tools and explosion-proof equipment. When transferring product, storage tanks, tanker trucks, and rail tank cars should be grounded and bonded. Do not breathe vapor or mist. Use in a well ventilated area. Avoid contact with eyes, skin, clothing, and shoes. Do not smoke while using this product.
- SHIPPING AND STORING:** Keep container tightly closed when not in use and during transport. Do not pressurize, cut, weld, braze, solder, drill, or grind containers. Keep containers away from heat, flame, sparks, static electricity, or other sources of ignition. Empty product containers may retain product residue and can be dangerous. See **SECTION 14: TRANSPORT INFORMATION** for Packing Group information.

SECTION 8: EXPOSURE CONTROLS/PERSONAL PROTECTION

- ENGINEERING CONTROLS:** Use general ventilation, process enclosures, local exhaust ventilation, or other engineering controls to control air-borne levels. Where explosive mixtures may be present, equipment safe for such locations should be used.

PERSONAL PROTECTIVE EQUIPMENT

- RESPIRATORY PROTECTION:** A respiratory protection program which meets USA's OSHA General Industry Standard 29 CFR 1910.134 or Canada's CSA Standard Z94.4-M1982 requirements must be followed whenever workplace conditions warrant a respirator's use. Consult a qualified Industrial Hygienist or Safety Professional for respirator selection guidance.
- EYE PROTECTION:** Wearing chemical goggles is recommended.
Contact lens may be worn with eye protection.
- SKIN PROTECTION:** Where prolonged or repeated skin contact is likely, wear neoprene, nitrile (4 mil minimum), PVC (polyvinyl chloride), or equivalent protective gloves; wearing natural rubber or equivalent gloves is not recommended.
- When product is heated and skin contact is likely, wear heat-insulating gloves, boots, and other protective clothing.
- To avoid prolonged or repeated contact with product where spills and splashes are likely, wear appropriate chemical-resistant faceshield, boots, apron, whole body suits, or other protective clothing.

Revision 9/07; MSDS Form No. 81451 - Page 6 of 10

**USED OIL
MATERIAL SAFETY DATA SHEET**

PERSONAL HYGIENE: Wash thoroughly with soap and water after handling product and before eating, drinking, or using tobacco products. Clean affected clothing, shoes, and protective equipment before reuse. Discard affected clothing, shoes, and/or protective equipment if they cannot be thoroughly cleaned. Discard leather articles, such as shoes, saturated with the product.

OTHER PROTECTIVE EQUIPMENT: Where spills and splashes are likely, facilities storing or using this product should be equipped with an emergency eyewash and shower, both equipped with clean water, in the immediate work area.

SECTION 9: PHYSICAL AND CHEMICAL PROPERTIES

PHYSICAL STATE, APPEARANCE, AND ODOR: Liquid, black and viscous (thick), petroleum odor.

ODOR THRESHOLD: Not available.

MOLECULAR WEIGHT: Not applicable.

SPECIFIC GRAVITY: 0.8 to 1.0 at 60°F (15.6°C) (water = 1)

DENSITY: 6.7 to 8.3 LB/US gal (800 to 1000 g/l) (approximately)

VAPOR DENSITY: greater than 1 (air = 1) (based on kerosene)

VAPOR PRESSURE: Not available.

BOILING POINT: Not available.

FREEZING/MELTING POINT: Not available.

pH: Not applicable.

EVAPORATION RATE: less than 1 (butyl acetate = 1)

SOLUBILITY IN WATER: Slight.

FLASH POINT: >200°F (93°C) (minimum) Pensky-Martens Closed Cup

FLAMMABLE LIMITS IN AIR: Not available.

AUTOIGNITION TEMPERATURE: Not available.

Revision 9/07; MSDS Form No. 81451 - Page 7 of 10

USED OIL
MATERIAL SAFETY DATA SHEET

SECTION 10: STABILITY AND REACTIVITY

STABILITY: Stable under normal temperatures and pressures. Avoid heat, sparks, or flame.

INCOMPATIBILITY: Avoid acids, alkalies, oxidizing agents, reducing agents, reactive halogens, or reactive metals.

REACTIVITY: Polymerization is not known to occur under normal temperatures and pressures. Not reactive with water.

HAZARDOUS DECOMPOSITION PRODUCTS: None under normal temperatures and pressures. Also see **SECTION 5: HAZARDOUS COMBUSTION PRODUCTS.**

SECTION 11: TOXICOLOGICAL INFORMATION

SENSITIZATION: Based on best current information, there may be known human sensitization associated with this product.

MUTAGENICITY: Based on best current information, there may be mutagenicity associated with this product.

CARCINOGENICITY: Mineral oils, untreated or mildly treated are listed by IARC as a known carcinogen. Mineral oils, untreated or mildly treated are classified by NTP as having limited evidence of carcinogenicity in humans or sufficient evidence of carcinogenicity in experimental animals.

There may be hydrocarbon and chlorinated solvents; metals, and polynuclear aromatics present in this product which are listed by OSHA as known carcinogens. There may be hydrocarbon and chlorinated solvents; metals, and polynuclear aromatics present in this product which are listed by IARC as known, probable, or possible carcinogens. There may be hydrocarbon and chlorinated solvents; metals, and polynuclear aromatics present in this product which are classified by NTP as known carcinogens or as having limited evidence of carcinogenicity in humans or sufficient evidence of carcinogenicity in experimental animals. There may be hydrocarbon and chlorinated solvents; metals, and polynuclear aromatics present in this product which are recognized by ACGIH as confirmed or suspected human carcinogens.

Also see **SECTION 3: CANCER INFORMATION.**

Revision 9/07; MSDS Form No. 81451 - Page 8 of 10

USED OIL MATERIAL SAFETY DATA SHEET

REPRODUCTIVE TOXICITY: Based on best current information, there may be reproductive toxicity associated with this product.

TERATOGENICITY: Based on best current information, there may be teratogenicity associated with this product.

TOXICOLOGICALLY SYNERGISTIC PRODUCT(S): Based on best current information, there may be toxicologically synergistic products associated with this product.

SECTION 12: ECOLOGICAL INFORMATION

ECOTOXICITY: Not available.

OCTANOL/WATER PARTITION COEFFICIENT: Not available.

VOLATILE ORGANIC COMPOUNDS: Not available.
As per 40 CFR Part 51.100(s).

SECTION 13: DISPOSAL CONSIDERATIONS

Dispose in accordance with federal, state, provincial, and local regulations. Regulations may also apply to empty containers. The responsibility for proper waste disposal lies with the owner of the waste. Contact Safety-Kleen regarding proper recycling or disposal.

SECTION 14: TRANSPORT INFORMATION

DOT: Not regulated.

TDG: Not regulated.

EMERGENCY RESPONSE GUIDE NUMBER: Not applicable.
Reference *North American Emergency Response Guidebook*

SECTION 15: REGULATORY INFORMATION

USA REGULATIONS SARA SECTIONS 302 AND 304: Based on the ingredient(s) listed in **SECTION 2**, this product does not contain any "extremely hazardous substances" listed pursuant to Title III of the Superfund Amendments and Reauthorization Act of 1986 (SARA) Section 302 or Section 304 as identified in 40 CFR Part 355, Appendix A and B.

Revision 9/07; MSDS Form No. 81451 - Page 9 of 10

USED OIL MATERIAL SAFETY DATA SHEET

SARA SECTIONS 311 AND 312:

This product poses the following physical and health hazards as defined in 40 CFR Part 370 and is subject to the requirements of sections 311 and 312 of Title III of the Superfund Amendments and Reauthorization Act of 1986 (SARA):
Immediate (Acute) Health Hazard
Delayed (Chronic) Health Hazard

SARA SECTION 313:

This product may contain "toxic" chemicals subject to the requirements of section 313 of Title III of the Superfund Amendments and Reauthorization Act of 1986 (SARA) and 40 CFR Part 372.

CERCLA:

This product may contain "hazardous substances" listed pursuant to Comprehensive Environmental Response, Compensation and Liability Act of 1980 (CERCLA) in 40 CFR Part 302, Table 302.4.

TSCA:

Not available.

CALIFORNIA:

This product is not for sale or use in the State of California.

CANADIAN REGULATIONS

WHMIS: Not regulated

CANADIAN ENVIRONMENTAL PROTECTION ACT (CEPA):

Not available.

SECTION 16: OTHER INFORMATION

REVISION INFORMATION: Change from MSIS to MSDS.

LABEL/OTHER INFORMATION: Not available.

User assumes all risks incident to the use of this product. To the best of our knowledge, the information contained herein is accurate. However, Safety-Kleen assumes no liability whatsoever for the accuracy or completeness of the information contained herein. No representations or warranties, either express or implied, or merchantability, fitness for a particular purpose or of any other nature are made hereunder with respect to information or the product to which information refers. The data contained on this sheet apply to the product as supplied to the user.



©2007 Safety-Kleen Systems, Inc.

Revision 9/07; MSDS Form No. 81451 - Page 10 of 10